


Pin Assignment

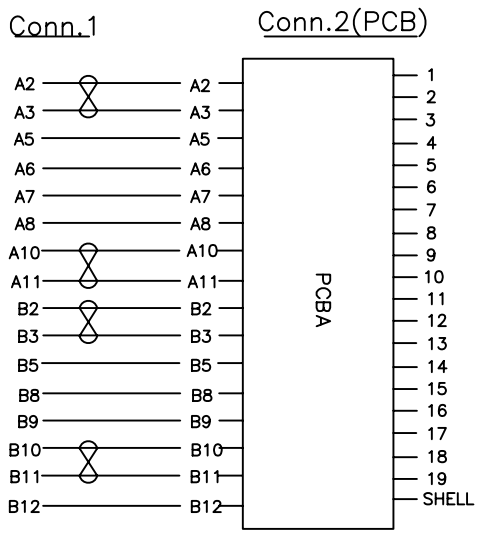

Electrical performance test: HDMI to VGA machine testing
 1.Signal Source DVD:4K*2K/30HZ
 2.The video has no signal jitter,smearing,ghosting,missing color and other abnormal displaying.
 3.TV or monitor:4K*2K/30HZ

| NO | DESCRIPTION | Q'TY | UNIT | REV. | DESCRIPTION | DATE |
|----|--|------|------|----------|---------------|------------|
| 7 | 45P TPE WHITE | 8 | G | | | |
| 6 | PE | 2 | G | | | |
| 5 | Hood for HDMI A F, ALUMINIUM ALLOY | 1 | PCS | | | |
| 4 | Hood for TYPE C, ALUMINIUM ALLOY | 1 | PCS | | | |
| 3 | USB3.1 (C) M Solder Type Shell nickel, BLACK Insulation | 1 | PCS | | | |
| 2 | USB 3.1 TYPE C TO HDMI F PCBA(IC:LT8711H)Shell nickel,Black Insulation | 1 | PCS | | | |
| 1 | USB 3.1 (32#(7/0.08T)*1P+D(7/0.08T)+AL+MY)*4P+32#(7/0.08T)*1P+32#(7/0.08T)*4C+22#(65/0.0.08T)*2C+F+AB(16/9/0.8TC) OD:4.5MM TPE WHITE | 0.15 | M | | | |
| | | | | REV. | DESCRIPTION | DATE |
| | | | | | TOLERANCE | |
| | | | | | INCHES M/M | |
| | | | | | .X | .015 .30 |
| | | | | | .XX | .010 .10 |
| | | | | | .XXX | .005 .05 |
| | | | | DRAWN BY | CUSTOMER : | |
| | | | | CHECK BY | CUSTOMER NO.: | AV7-6310-H |
| | | | | APPD BY | SCALE | NONE |
| | | | | | UNIT | MM |
| | | | | | DATE | 2017.6.26 |
| | | | | | DRAWING NO.: | REV. |
| | | | | | | 1/1 |