




# RoHS-COMPLIANT

REV	LTR	DESCRIPTION	DATE	APPROVED

USB3.0 A TYPE  
INS:BLUE(PT 300C)

USB3.1 C TYPE  
INS:BLACK

P1

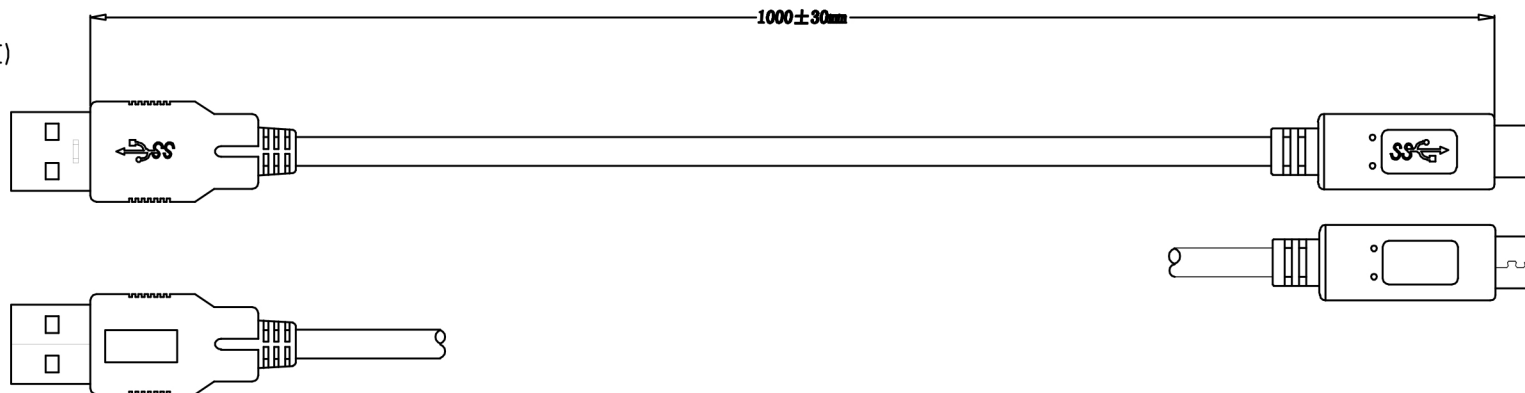

P2

## NOTE:

1.CABLE: (7/0.08T×1P+D+AL+MYLAR)×2P+7/0.08T×1P+7/0.20T×2C+ADB

PVC JACKET OD:4.0mm Color:BLACK USB3.0CABLE

## 2.CONNECTOR:

P1: USB 3.0 A TYPE MALE 9PIN CONTACT:G/F,SHELL:NI-PLATED.


P2: USB 3.1 C TYPE MALE 12PIN CONTACT:G/F,SHELL:NI-PLATED.


3.HOOD:MOLDED TYPE,PVC 45P, Color:BLACK

## 4.ELECTRICAL TEST:

- (1)100% OPEN SHORT & MIS WIRE TEST.
- (2)CONTACT RESISTANCE 2 ohm Max .
- (3)INSULATION RESISTANCE 10M ohm Min .
- (4)HI-POT DC300V

## PIN ASSIGNMENT:

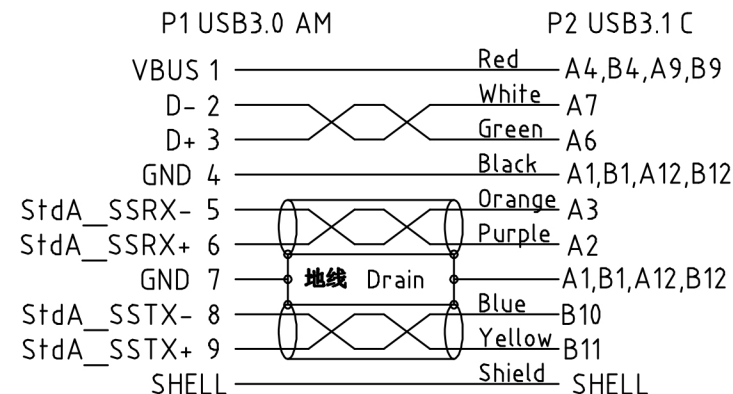

<b>TOLERANCES</b> . X ±0.15 . XX ±0.10 . XXX ±0.05 <b>ANGLES ±2.00°</b>	 <small>cables &amp; connectors since 1995</small>				
	<b>TITLE:</b> USB 3.1 Generation 1 Type C Male to USB 3.0 Type A Male Cable- 3 FT				
<b>APPD.:</b> <small>john</small>	<b>Part No.</b> 23-230-003				
<b>CHECK:</b>	<b>REV.:</b> <small>michael 15/02/16</small>	<b>SIZE:</b> A4	<b>UNIT:</b> MM	<b>SCALE:</b> 1 : 1	<b>SHEET:</b> 1/1