


# SC/ST 9/125 Singlemode Duplex Fiber Patch Cables

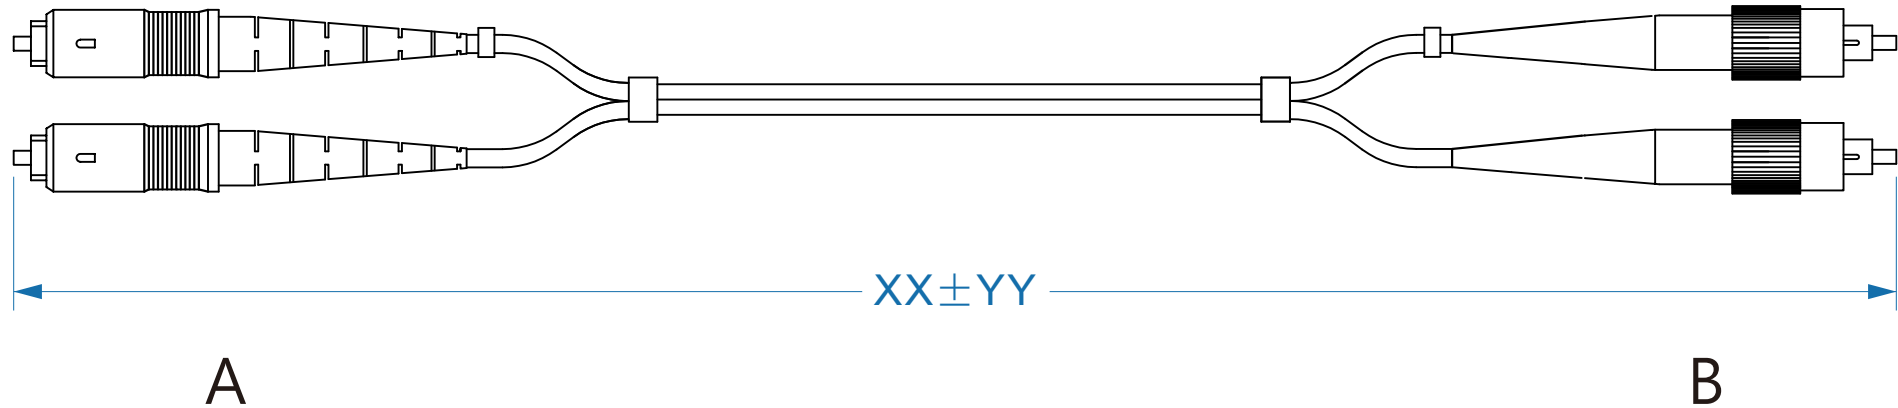

XX	YY
XX ≤ 1M	YY ± 50MM
XX > 1M	YY ± 100MM

- Connector A: SC/UPC SM  
Connector B: ST/UPC SM
- Cable Type: Duplex  $\phi$ 2.0mm Singlemode 9/125um
- Length: X (Unit: Meter)
- Jacket Color: Yellow
- Insertion Loss(IL):  $\leq 0.20\text{dB}$ (PC/UPC)  $\leq 0.30\text{dB}$ (PC/APC)
- Return Loss(RL): PC  $\geq 50\text{dB}$  UPC  $\geq 55\text{dB}$  APC  $\geq 65\text{dB}$
- Maximum Attenuation: 0.4/0.3 dB/km (1310/1550)
- Min Bending Radius: 6cm (Loaded), 4cm (Unloaded)
- Operating Temperature: -20 Centigrade to +70 Centigrade
- Storage Temperature: -40 Centigrade to +85 Centigrade
- Packing: Each cable packed in a zip-lock polybag
- Standards: TIA/EIA-568B.3  
GR-326-CORE

RoHS

PART NO.	30-126-XX				
TITLE	SC/ST 9/125 Singlemode Duplex Fiber Patch Cables				
SCALE	NOT SCALE	REV.	A		
DRAWER	LEO	UNIT	Meter		
CHECKED	RAYMOND				
APPROVED	TOM				