


# FC/APC to SC/APC 9/125 Singlemode Duplex Fiber Patch Cables

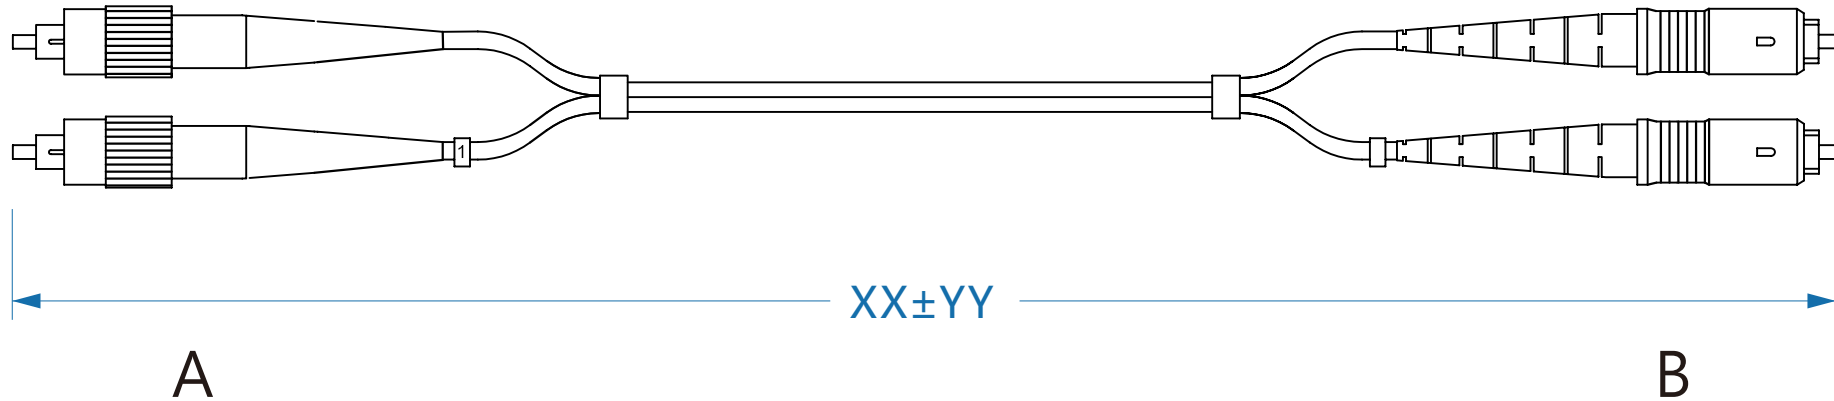

XX	YY
XX≤1M	YY±50MM
XX>1M	YY±100MM

- Connector A: FC/APC SM  
Connector B: SC/APC SM
- Cable Type: Duplex φ2.0mm Singlemode 9/125um
- Length: X (Unit: Meter)
- Jacket Color: Yellow
- Insertion Loss(IL): ≤0.20dB(PC/UPC) ≤0.30dB(PC/APC)
- Return Loss(RL): PC≥50dB UPC≥55dB APC≥65dB
- Maximum Attenuation: 0.4/0.3 dB/km (1310/1550)
- Min Bending Radius: 6cm (Loaded), 4cm (Unloaded)
- Operating Temperature: -20 Centigrade to +70 Centigrade
- Storage Temperature: -40 Centigrade to +85 Centigrade
- Packing: Each cable packed in a zip-lock polybag
- Standards: TIA/EIA-568B.3  
GR-326-CORE

RoHS

PART NO.	30-225-XX				
TITLE	FC/APC-SC/APC 9/125 Singlemode Duplex Fiber Cables				
SCALE	NOT SCALE	REV.	A		
DRAWER	LEO	UNIT	Meter		
CHECKED	RAYMOND				
APPROVED	TOM				