


SC/UPC to LC/APC 9/125 Singlemode Duplex Fiber Patch Cables

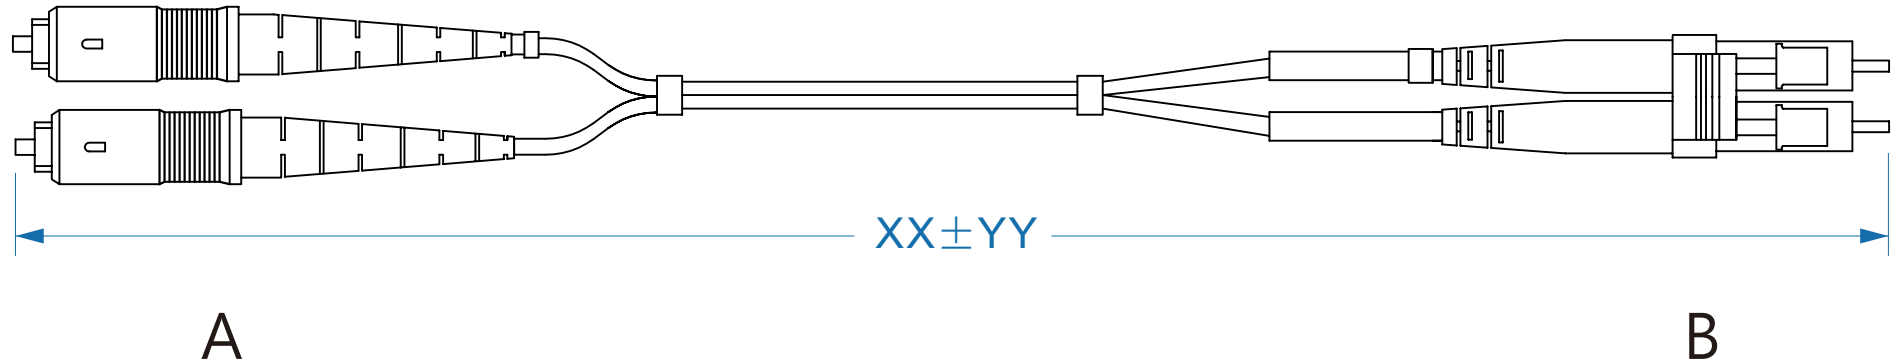

XX	YY
XX ≤ 1M	YY ± 50MM
XX > 1M	YY ± 100MM

1. Connector A: SC/UPC SM
Connector B: LC/APC SM
2. Cable Type: Duplex φ2.0mm Singlemode 9/125um
3. Length: X (Unit: Meter)
4. Jacket Color: Yellow
5. Insertion Loss(IL): ≤0.20dB(PC/UPC) ≤0.30dB(PC/APC)
6. Return Loss(RL): PC ≥ 50dB UPC ≥ 55dB APC ≥ 65dB
7. Maximum Attenuation: 0.4/0.3 dB/km (1310/1550)
8. Min Bending Radius: 6cm (Loaded), 4cm (Unloaded)
9. Operating Temperature: -20 Centigrade to +70 Centigrade
10. Storage Temperature: -40 Centigrade to +85 Centigrade
11. Packing: Each cable packed in a zip-lock polybag
12. Standards: TIA/EIA-568B.3
GR-326-CORE

RoHS

PART NO.	30-302-XX				
TITLE	SC/UPC-LC/APC 9/125 Singlemode Duplex Fiber Cables				
SCALE	NOT SCALE	REV.	A		
DRAWER	LEO	UNIT	Meter		
CHECKED	RAYMOND				
APPROVED	TOM				