



THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	09/28/07	D.PARHAM

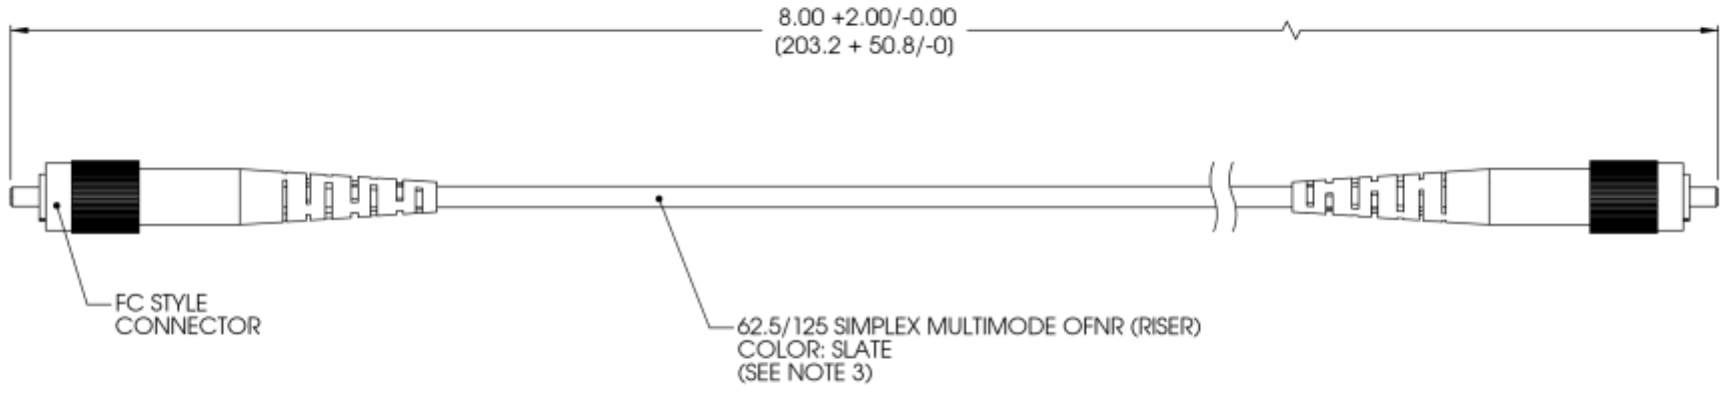

- NOTES:
- CONNECTOR ASSEMBLIES USE PC POLISH.
  - ALL CONNECTORS ACCOMPANIED WITH DUST CAP. (NOT SHOWN)
  - CABLE O.D. RANGE: 1.6mm TO 3.0mm
  - THIS ASSEMBLY DOES NOT CONTAIN A DUPLEX CLIP.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES (mm)  
 TOLERANCES TO BE:  
 .X ± .1 (2.5) ANGLES ± 2°  
 .XX ± .01 (.25)  
 .XXX ± .005 (.13)  
 OVERALL CABLE LENGTH TOL:  
 ≤ 60 (1524) +3 (76.2) / - 0  
 > 60 (1524) +5% / -0%



APPROVALS	DATE
DRAWN BY D.PARHAM	09/28/2007
CHECKED BY D.FRISIELLO	09/28/2007
APPROVED BY J.KIEZULAS	09/28/2007

CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY

CATEGORY		FIBER OPTIC	
PRODUCT DESCRIPTION		62.5/125 MULTIMODE LOOPBACK	
SIZE	DWG. NO.	REV.	
<b>A</b>	FOL-FC	<b>A</b>	
SCALE: NONE	CAD FILE: FOL-FC.SLDDRW	SHEET 1 OF 1	