


SC/UPC to SC/UPC 10GB OM3 Multimode Duplex Fiber Patch Cords

REV.	DESCRIPTION	DATE
A		12-2016

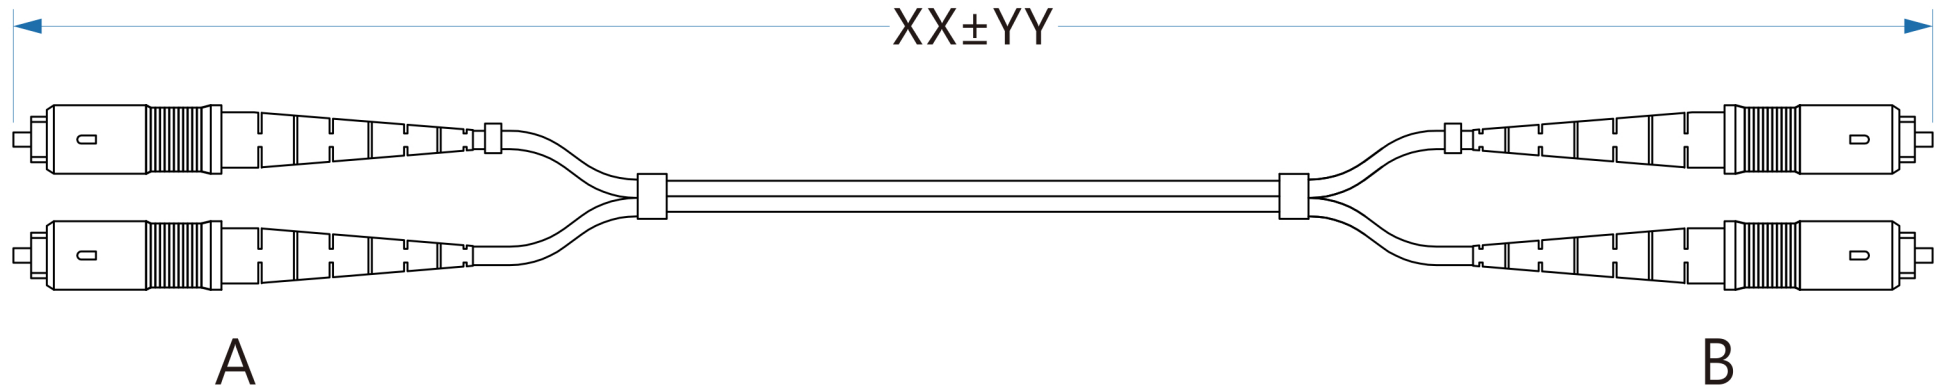

1. CONNECTOR A: SC/UPC OM3 Boot: Red/Black  
CONNECTOR B: SC/UPC OM3 Boot: Red/Black
2. Cable Type: Duplex  $\phi$ 2.0mm 10GB OM3 Multimode 50/125um
3. Length: X (Unit: Meter)
4. Jacket Color: Aqua
5. Insertion Loss(IL):  $\leq 0.20\text{dB(PC/UPC)}$   
Return Loss(RL):  $\geq 35\text{dB(PC/UPC)}$
6. Maximum Attenuation: 3.5/1.5 dB/km (850/1300nm)
7. Min Bendwidth: 200/500 MHz.km
8. Min Bending Radius: 4cm (Loaded), 2cm (Unloaded)
9. Operating Temperature: -20 Centigrade to +70 Centigrade
10. Storage Temperature: -40 Centigrade to +85 Centigrade
11. Packing: Each cable packed in a zip-lock polybag
12. Standards: TIA/EIA-568B.3  
BELLCORE GR-409

XX	YY
XX $\leq$ 1M	YY $\pm$ 50MM
XX $>$ 1M	YY $\pm$ 100MM

RoHS

Part No.	36-120-xxx	DRAWER	LEO
TITLE	SC/SC 10 GB Laser Optimized Multi-mode Fiber Patch Cable- OM3	CHECKED	Raymond
		APPROVED	Tom
MATERIAL	SCALE		
REV.	A		UNIT
DRAWING NO:		 <small>cables &amp; connectors since 1995</small>	