
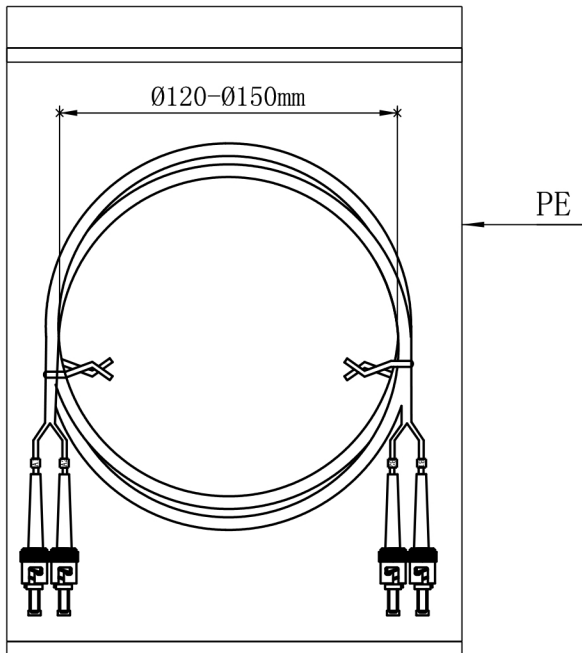


NOTE:ALL MATERIAL COMPLIANT ROHS STANDARD

REVISION INFORMATION

Rev.	Rev. Date	Modified By	Brief Description

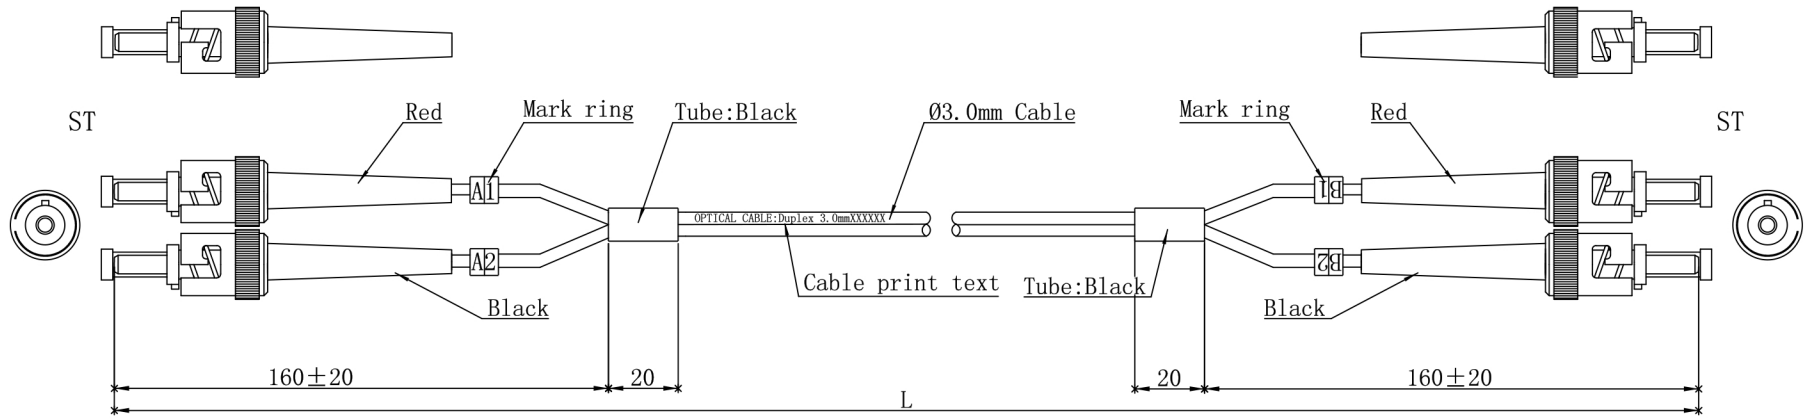

Specifications:

Type	ST/UPC-ST/UPC
Fiber Mode	OM3
Core Diameter(um)	50/125
Operating Wavelength(nm)	850/1300
Cable Color	Aqua
Cable Diameter(mm)	Ø3.0
Operating Temperature(° C)	-40~+75
Storage Temperature(° C)	-40~+85
Insertion loss(dB)	≤0.2dB
Return loss(dB)	≥35dB
ST Connector Color(Boot)	Red/Black

$L \leq 5m$ , TOLERANCES: $0 \leq \Delta L \leq 5cm$
$L > 5m$ , TOLERANCES: $0 \leq \Delta L \leq 1\% * L$

Length	Item #
1m	102646
2m	102647
3m	102648
5m	102649
10m	102650
15m	102651

**Show Me**  
CABLES

cables & connectors since 1995

①					Unless specified on the drawing, tolerances are per the follows: . +1 .x +0.2 .xx +0.05
②					
③					
NO.	PART NAME	SPECIFICATION DESCRIPTION	QTY	UNIT	

DRAWN BY	DATE:	Title: ST/ST 10 GB Laser Optimized Multimode Fiber Patch Cable- OM3	
CHECKED BY	SHEET 1of1	ITEM NO. 36-130-XXX	
APPROVED BY	SCALE 1:1	REV. 00	UNIT:mm