


SC/SC 10GB Laser Optimized Multimode Fiber Patch Cable-OM3

REV.	DESCRIPTION	DATE
A		01-2017

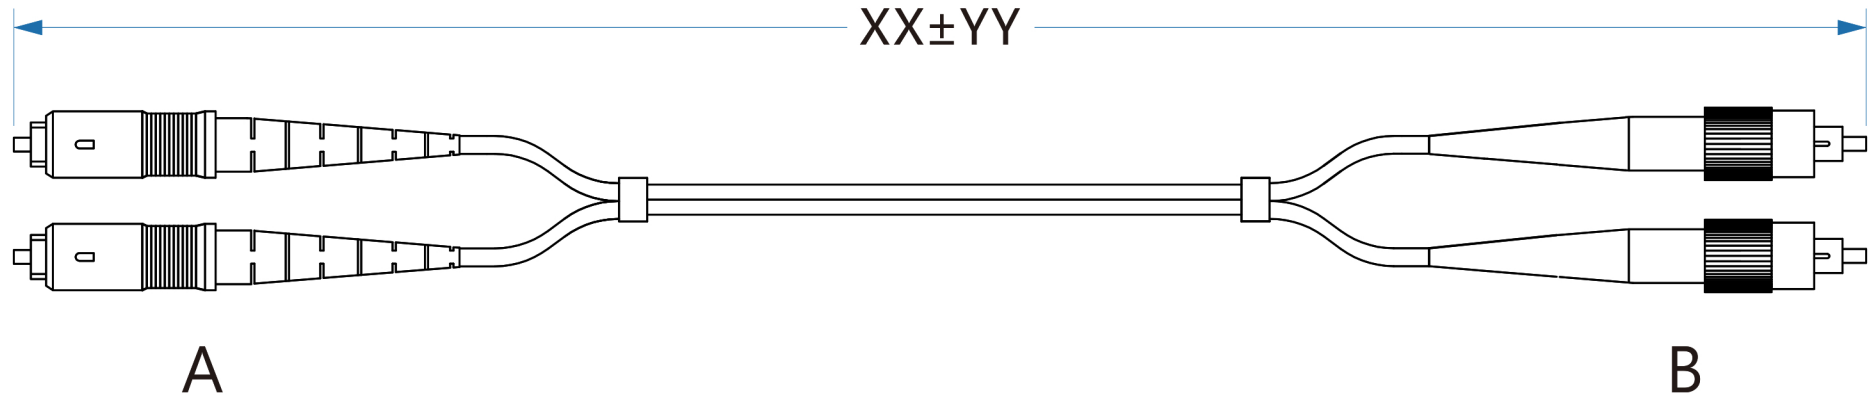

- CONNECTOR A: SC/UPC OM3 Boot: Red/Black
CONNECTOR B: ST/UPC OM3 Boot: Red/Black
- Cable Type: Duplex ϕ 2.0mm 10GB OM3 Multimode 50/125um
- Length: X (Unit: Meter)
- Jacket Color: Aqua
- Insertion Loss(IL): $\leq 0.20\text{dB}$ (PC/UPC)
Return Loss(RL): $\geq 35\text{dB}$ (PC/UPC)
- Maximum Attenuation: 3.5/1.5 dB/km (850/1300nm)
- Min Bendwidth: 200/500 MHz.km
- Min Bending Radius: 4cm (Loaded), 2cm (Unloaded)
- Operating Temperature: -20 Centigrade to +70 Centigrade
- Storage Temperature: -40 Centigrade to +85 Centigrade
- Packing: Each cable packed in a zip-lock polybag
- Standards: TIA/EIA-568B.3
BELLCORE GR-409

XX	YY
XX \leq 1M	YY \pm 50MM
XX $>$ 1M	YY \pm 100MM



Part No.	36-140-XX		DRAWER	LEO
TITLE	SC/ST 10 GB Laser Optimized Multi-mode- Fiber Patch Cable- OM3		CHECKED	Raymond
			APPROVED	Tom
MATERIAL		SCALE		
REV.	A	UNIT	Meter	
DRAWING NO:			 cables & connectors since 1995	