


Electrical Test:

1. 100%Test(Open ,short ,miss wire)
2. Contact Resistance: 6 ohm max.
3. Insulation Resistance: 10M ohm min.
4. Hi-pot:100V DC/10ms

L
915±30MM
1830±30MM
3050±40MM
4575±50MM

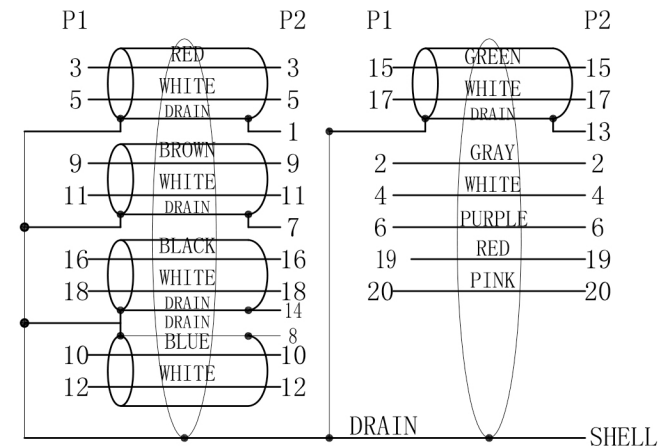

13	mini DisplayPort M ABS Under the Shell Color:White	1	PCS
12	mini DisplayPort M ABS On the Shell Color:White	1	PCS
11	Mini DisplayPort M 32AWG Black line double rows	1	PCS
10	Mini DisplayPort M Insulation White Glod plated shell	1	PCS
9	MINI DP TO PCB 32AWG Black line double rows	1	PCS
8	HDMI M Transparent PVC dust cover	1	PCS
7	mini Display Port M Transparent PVC dust cover	1	PCS
6	HDMI AM ABS Back Shell Color:White	1	PCS
5	HDMI AM ABS Front Shell Color:White	1	PCS
4	H. S. T ϕ 1.5 8MM*2PCS	0.016	m
3	45P PVC Color:White	6	g
2	MDPH12M-15FT With PCB	1	PCS
1	Display Port UL20276 [32AWG(7/0.08TC)*1PR+EAM)*5+32AWG(7/0.08TC)*5C+D(BC)+AEB 85% (16/7/0.12AL) OD:4.8MM Color:White	L	m
NO	ITEM	DESCRIPTION	Q'TY UNIT

	TOLERANCE			TITLE: Mini DisplayPort Male to HDMI Male		
	INCHES	M/M				
	.X	.015 .30				
	.XX	.010 .10	CUSTOMER :			
	.XXX	.005 .05	Part No:		40-625-XXX	
	DRAWN BY		SCALE	NONE	DRAWING NO.:	REV. A01
	CHECK BY		UNIT	MM		
	APPD BY		DATE	2017.02.20		1/1