
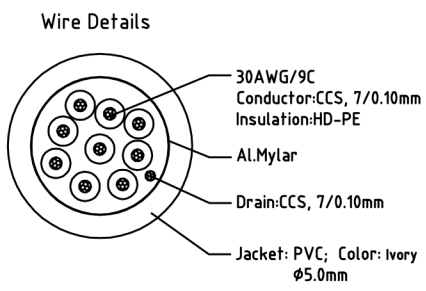


NOTE:ALL MATERIAL COMPLIANT ROHS STANDARD

REVISION INFORMATION			
Rev.	Rev.Date	Modified By	Brief Description


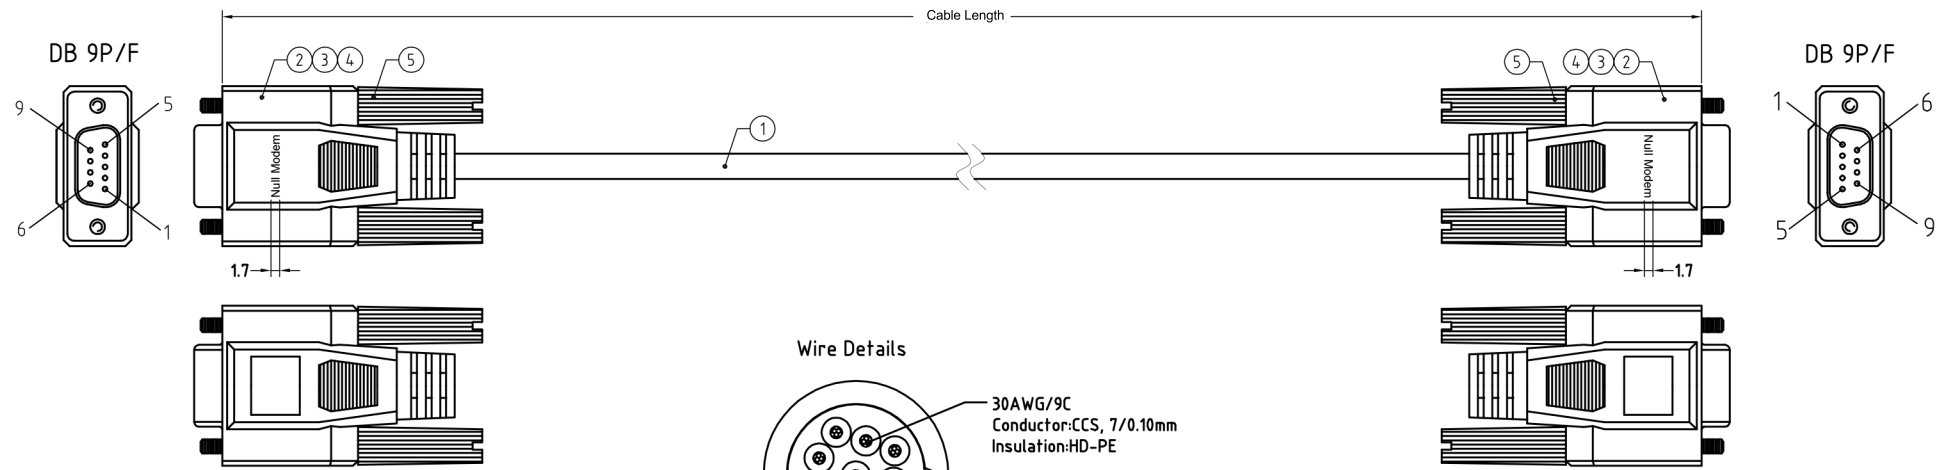


Electrical character:
 1)100% Open/short/Intermittent testing
 2)Withstanding voltage:DC 300V AT 10ms.
 3)Insulation resistance:10M Ohm(min)
 4)Conductive resistance:8 Ohm(max)

Length Tolerance
 6ft (1830 +- 25)
 10ft (3550 +- 30)
 25ft (7625 +- 70)

PIN ASSIGNMENT:

DB 9P/F	DB 9P/F
1&6	4
2	3
3	2
4	1&6
5	5
7	8
8	7
SHELL	SHELL



NO.	PART NAME	SPECIFICATION DESCRIPTION	QTY	UNIT
⑤	Thumbscrew	#4-40UNC,ø4.0xL37.4mm,Nickel Plated,Molding PVC(Ivory)	4	PCS
④	Overmold	PVC,45Pa,Ivory	N/A	G
③	Innermold	PE,Low density	N/A	G
②	DB_Conn	DB 9P/F,PIN G/F,Blue Insulation,Steel-Shell(Nickel Plated),Solder type	2	PCS
①	Cable	30#(7/0.10CCS)x9C+D+A+PVC,Ivory,Ø5.0mm	N/A	MM

an INFINIT® brand

DRAWN BY	DATE: 2014/11/03	Title: DB9 Female to DB9 Female Null Modem Serial Cable	
CHECKED BY	SHEET 1 of 1	Part No: 43-106-XXX	
APPROVED BY	SCALE None	REV. 00	UNIT: mm