


P1,P2: M-Y222E  
M-222E  
P3: M-426E

Customer No: \_\_\_\_\_

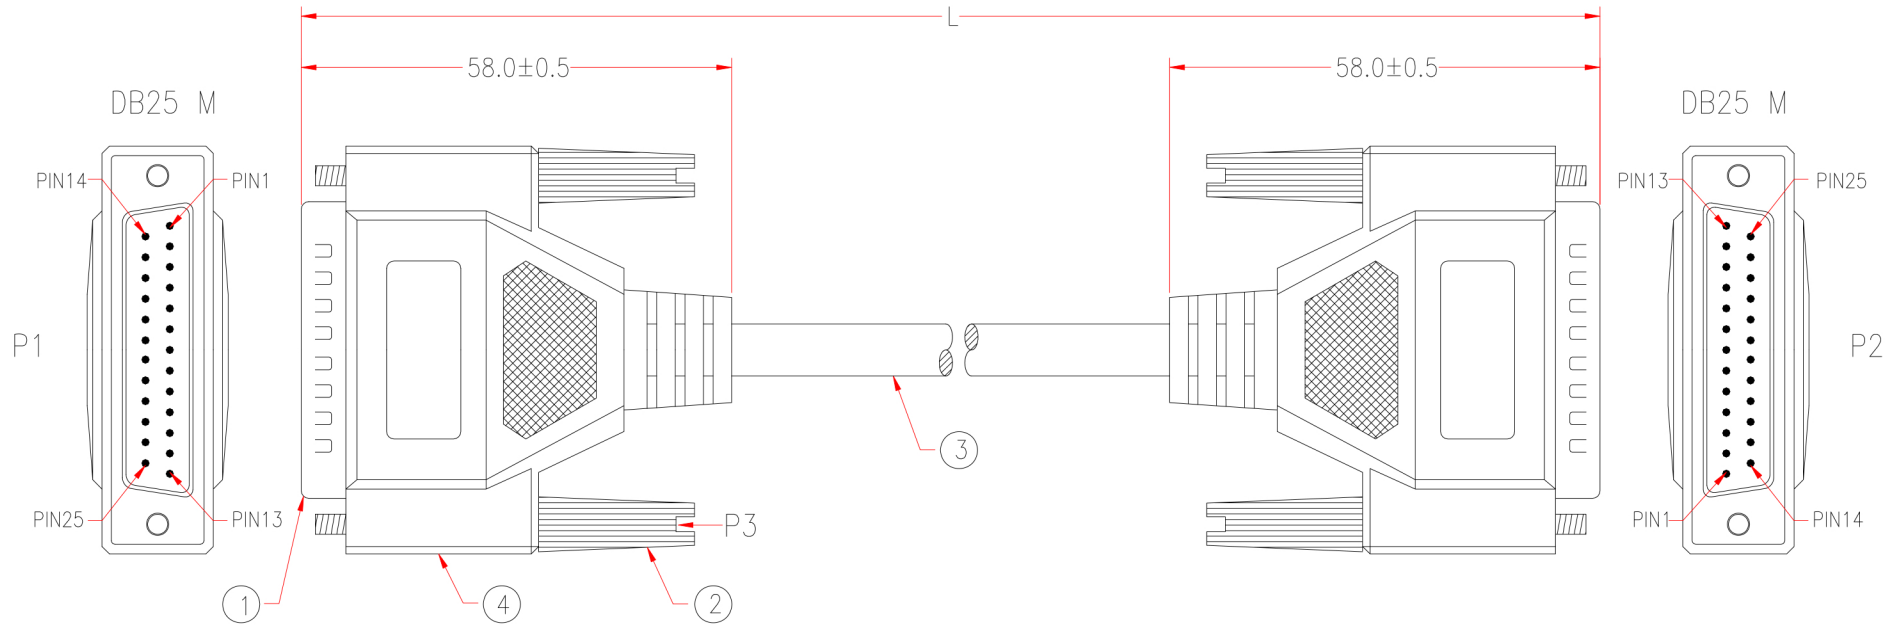

\*NOTE: All relevant materials are complied with RoHS directive .

2003							
P1		P2		P1		P2	
BLACK	1	1	BROWN/BLACK	14	14		
BROWN	2	2	RED/BLACK	15	15		
RED	3	3	ORANGE/BLACK	16	16		
ORANGE	4	4	YELLOW/BLACK	17	17		
YELLOW	5	5	GREEN/BLACK	18	18		
GREEN	6	6	BLUE/BLACK	19	19		
BLUE	7	7	PURPLE/BLACK	20	20		
PURPLE	8	8	GRAY/BLACK	21	21		
GRAY	9	9	WHITE/BLACK	22	22		
WHITE	10	10	PINK/BLACK	23	23		
PINK	11	11	LIGHT GREEN/BLACK	24	24		
LIGHT GREEN	12	12	LIGHT BLUE/BLACK	25	25		
LIGHT BLUE	13	13	SHIELD	SHIELD	SHIELD		



No.	DESCRIPTION	Q'TY	Supplier
4	BLACK PVC TUBE $\phi$ 3.0*30mm	2	M304
	ALUMINUM FOIL 33*110mm	2	M309
	MOLDED PE COLOR TRANSPARENT		M7777
	MOLDED PVC BEIGE		M304
3	NON-UL 25C 28AWG, ALUM-MYLAR FOIL SHIELDING WITH DRAIN WIRE, OD 7.0mm, JACKET BEIGE, DRAWING No. EMAL2825C-095	Lmm	M304
2	MOLDED THUMBSCREW #4-40, LENGTH 46.5mm, BEIGE	4	M95
1	DB25 MALE, GOLD FLASH ON CONTACTS, BLUE INSULATOR	2	M108

APPROVED		 cables & connectors since 1995	Cable Length Unless Other Spec. Tolerances: 0 ~200mm $\pm$ 10mm 201~1000mm $\pm$ 20mm 1001 ~1500mm $\pm$ 25mm 1501~2100mm $\pm$ 30mm 2100mm $\uparrow$ $\pm$ 40mm
CHECKED	HU		
DRAWING	XU		
DATE	11/SEP/17	Title: DB25 Male to DB25 Serial Cable-3FT	
	Part No.	43-123-003	UNIT:mm