

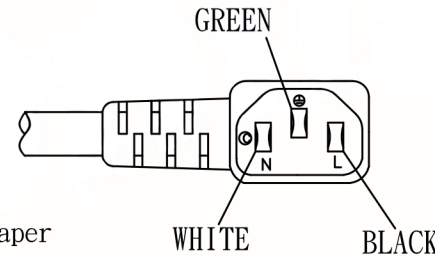
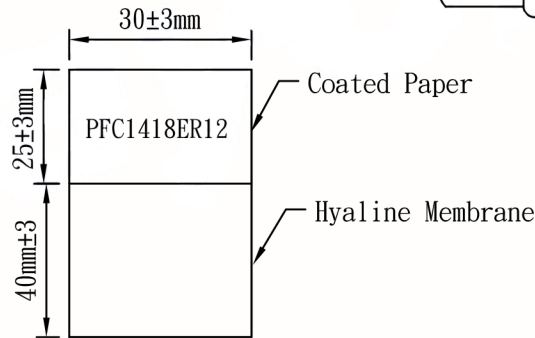


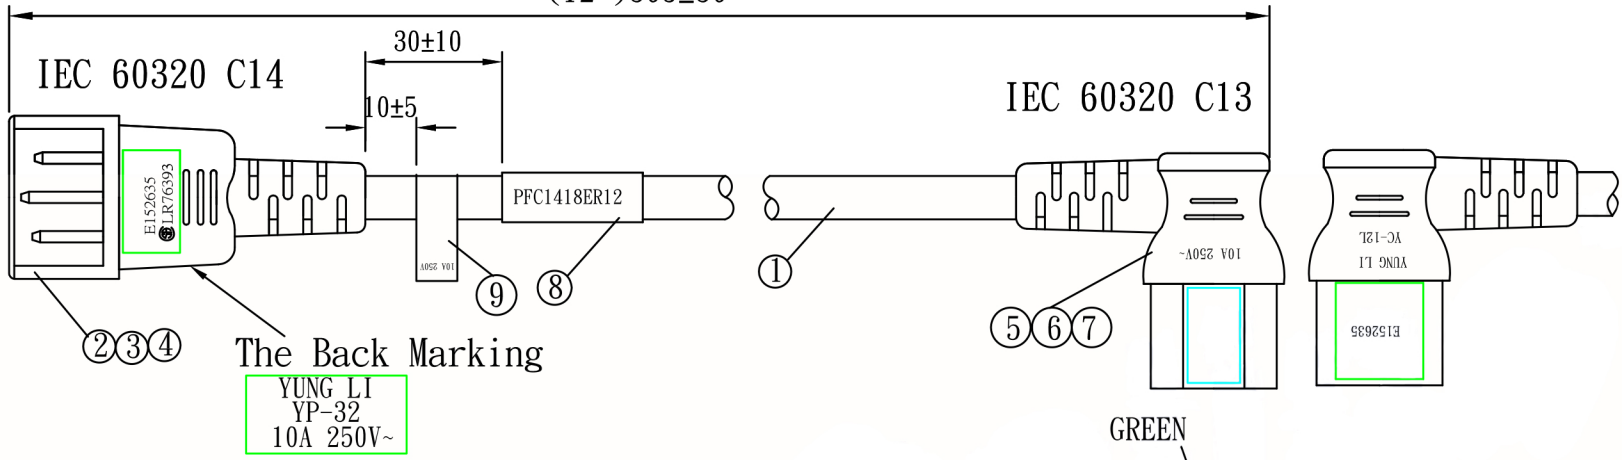

(12")305±30



Packing:
 1. Bulk Pack.
 2. Bundles of 10 Pieces.

NO.	SPECIFICATION	Q' TY	REMARK
1	SJT 18/3C 105 °C BLACK	1PC	
2	YP-32 PVC PLASTIC:35P BLACK	15g/PC	
3	TERMINAL:98672BS-1	3PCS	
4	H. S. G: 2X4 BLACK	1PC	
5	TER:97740BS-0	3PCS	
6	YC-12L INNR BODY	1PC	
7	YC-12L PVC PLASTIC:35P BLACK	18g/PC	
8	LABEL:(40+25)*30mm	1PC	
9	LABEL: 55*15mm	1PC	

Tolerance >0±0.30 >1.0±0.50 >10.0±1.0 >20.0±2.0 Angle: ±1°	Approved		Date		 cables & connectors since 1995			
	Checked		Date					
	Drawn		Date		TITLE:	CPU/PDU POWER CORD- C14 TO C13 RIGHT ANGLE- AMP		
	Cat. No.				P/N.	44-218-XXX		
				Rev.	B	Material	P. V. C	Unit
					Scale			