


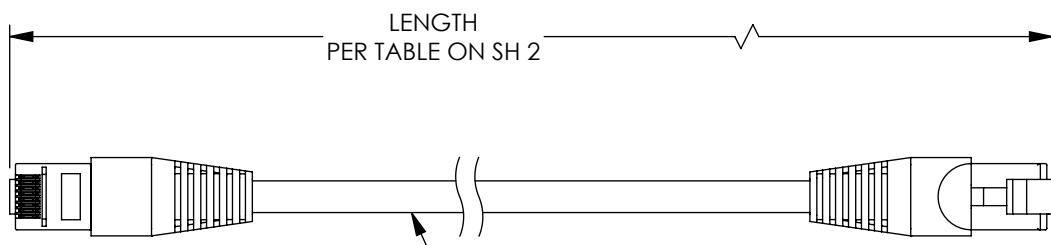


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SHOW ME CABLES, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF SHOW ME CABLES, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
	INITIAL RELEASE	01/26/2021	GUTTADAURO

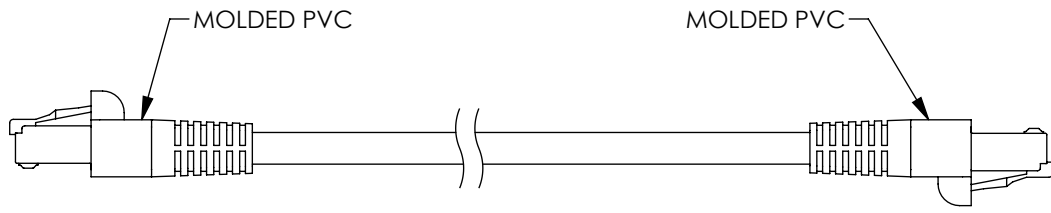

CABLE CONSTRUCTION:
24AWG STRANDED,
PVC JACKET, FLAME RATING CMX/CMH

P1	WIRING MAP	P2
1		1 WHT/ORN
2		2 ORN
3		3 WHT/GRN
6		6 GRN
5		5 WHT/BLU
4		4 BLU
7		7 WHT/BRN
8		8 BRN


NOTES:

1. CHANNEL RATED.
2. PLUG CONFORMS TO TIA-1096.
3. CONTACT RESISTANCE: 2Ω MAX.
4. INSULATION REISTANCE: DC/250V, 10mΩ MIN, 0.01S.
5. HI-POT TEST: AC/250V 5mA MAX, 0.01S.
6. CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN A CLEAR POLYBAG.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0 ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5] FRACTIONS ± 1/32 .XX = ± .02 [.5] ANGLES ± 1° .XXX = ± .005 [.13]	APPROVALS DRAWN BY DZINN CHECKED BY DFRISIELLO APPROVED BY GUTTADAURO	DATE 01/26/2021 01/26/2021 01/26/2021	 an INFINIT brand 115 Chesterfield Industrial Blvd., Chesterfield, MO 63005 Phone: 1.888.519.9505 Fax: 1.888.519.9515		
	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY		CATEGORY TELECOM/MODULAR		
THIRD-ANGLE PROJECTION 	COLOR VARIATIONS MAY OCCUR	SIZE A	CAGE CODE 3SVT8	ITEM NO. 600-XX	REV. A
		SCALE: NONE	CAD FILE: 600-XX.SLDDRW	SHEET 1 OF 2	

LENGTH	BLACK	BLUE	GRAY	GREEN	ORANGE	PINK	PURPLE	RED	WHITE	YELLOW
6 INCHES	600-0.5 BK	600-0.5 BL	600-0.5 GY	600-0.5 GN	600-0.5 OR	600-0.5 PK	600-0.5 PR	600-0.5 RD	600-0.5 WH	600-0.5 YL
1 FOOT	600-01 BK	600-01 BL	600-01 GY	600-01 GN	600-01 OR	600-01 PK	600-01 PR	600-01 RD	600-01 WH	600-01 YL
2 FOOT	600-02 BK	600-02 BL	600-02 GY	600-02 GN	600-02 OR	600-02 PK	600-02 PR	600-02 RD	600-02 WH	600-02 YL
3 FOOT	600-03 BK	600-03 BL	600-03 GY	600-03 GN	600-03 OR	600-03 PK	600-03 PR	600-03 RD	600-03 WH	600-03 YL
5 FOOT	600-05 BK	600-05 BL	600-05 GY	600-05 GN	600-05 OR	600-05 PK	600-05 PR	600-05 RD	600-05 WH	600-05 YL
7 FOOT	600-07 BK	600-07 BL	600-07 GY	600-07 GN	600-07 OR	600-07 PK	600-07 PR	600-07 RD	600-07 WH	600-07 YL
10 FOOT	600-10 BK	600-10 BL	600-10 GY	600-10 GN	600-10 OR	600-10 PK	600-10 PR	600-10 RD	600-10 WH	600-10 YL
14 FOOT	600-14 BK	600-14 BL	600-14 GY	600-14 GN	600-14 OR	600-14 PK	600-14 PR	600-14 RD	600-14 WH	600-14 YL
20 FOOT	600-20 BK	600-20 BL	600-20 GY	600-20 GN	600-20 OR	600-20 PK	600-20 PR	600-20 RD	600-20 WH	600-20 YL
25 FOOT	600-25 BK	600-25 BL	600-25 GY	600-25 GN	600-25 OR	600-25 PK	600-25 PR	600-25 RD	600-25 WH	600-25 YL
30 FOOT	600-30 BK	600-30 BL	600-30 GY	600-30 GN	600-30 OR	600-30 PK	600-30 PR	600-30 RD	600-30 WH	600-30 YL
50 FOOT	600-50 BK	600-50 BL	600-50 GY	600-50 GN	600-50 OR	600-50 PK	600-50 PR	600-50 RD	600-50 WH	600-50 YL
100 FOOT	600-100 BK	600-100 BL	600-100 GY	600-100 GN	600-100 OR	600-100 PK	600-100 PR	600-100 RD	600-100 WH	600-100 YL

THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.

<p>UNLESS OTHERWISE SPECIFIED LEADING DIMENSIONS ARE INCHES DIMENSIONS IN [] ARE MILLIMETERS</p> <p>TOLERANCES:</p> <table> <tr> <td>X = ± .2 [.51]</td> <td>FRACTIONS ± 1/32</td> </tr> <tr> <td>.XX = ± .02 [.51]</td> <td>ANGLES ± 1°</td> </tr> <tr> <td>XXX = ± .005 [.13]</td> <td></td> </tr> </table> <p>CABLE LENGTH (L) TOLERANCES:</p> <table> <tr> <td>L ≤ 12 [305] = +1 [25] / -0</td> </tr> <tr> <td>12 [305] < L ≤ 60 [1524] = +2 [51] / -0</td> </tr> <tr> <td>60 [1524] < L ≤ 120 [3048] = +4 [102] / -0</td> </tr> <tr> <td>120 [3048] < L ≤ 300 [7620] = +6 [152] / -0</td> </tr> <tr> <td>300 [7620] < L = +5%L / -0</td> </tr> </table> <p>ALL DIMENSIONS SHOWN ARE FOR REFERENCE ONLY.</p>		X = ± .2 [.51]	FRACTIONS ± 1/32	.XX = ± .02 [.51]	ANGLES ± 1°	XXX = ± .005 [.13]		L ≤ 12 [305] = +1 [25] / -0	12 [305] < L ≤ 60 [1524] = +2 [51] / -0	60 [1524] < L ≤ 120 [3048] = +4 [102] / -0	120 [3048] < L ≤ 300 [7620] = +6 [152] / -0	300 [7620] < L = +5%L / -0	<p>Show Me CABLES</p> <p>an INFINIT® brand 115 Chesterfield Industrial Blvd., Chesterfield, MO 63005 Phone: 1.888.519.9505 Fax: 1.888.519.9515 Website: www.ShowMeCables.com E-mail: CustomerService@ShowMeCables.com</p>		<p>THIRD-ANGLE PROJECTION</p>  <p>THE INFORMATION AND DESIGN IN THIS DOCUMENT IS THE PROPERTY OF SHOWMECABLES, INC. ALL RIGHTS RESERVED.</p> <p>SHEET 2 OF 2</p> <p>SCALE N/A</p>	
X = ± .2 [.51]	FRACTIONS ± 1/32															
.XX = ± .02 [.51]	ANGLES ± 1°															
XXX = ± .005 [.13]																
L ≤ 12 [305] = +1 [25] / -0																
12 [305] < L ≤ 60 [1524] = +2 [51] / -0																
60 [1524] < L ≤ 120 [3048] = +4 [102] / -0																
120 [3048] < L ≤ 300 [7620] = +6 [152] / -0																
300 [7620] < L = +5%L / -0																
SIZE A	CAGE CODE 3SVT8	DRAWN BY DZINN	ITEM NO. 600-XX	REV A												