


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SHOW ME CABLES, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF SHOW ME CABLES, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	03/02/2022	GUTTADAURO

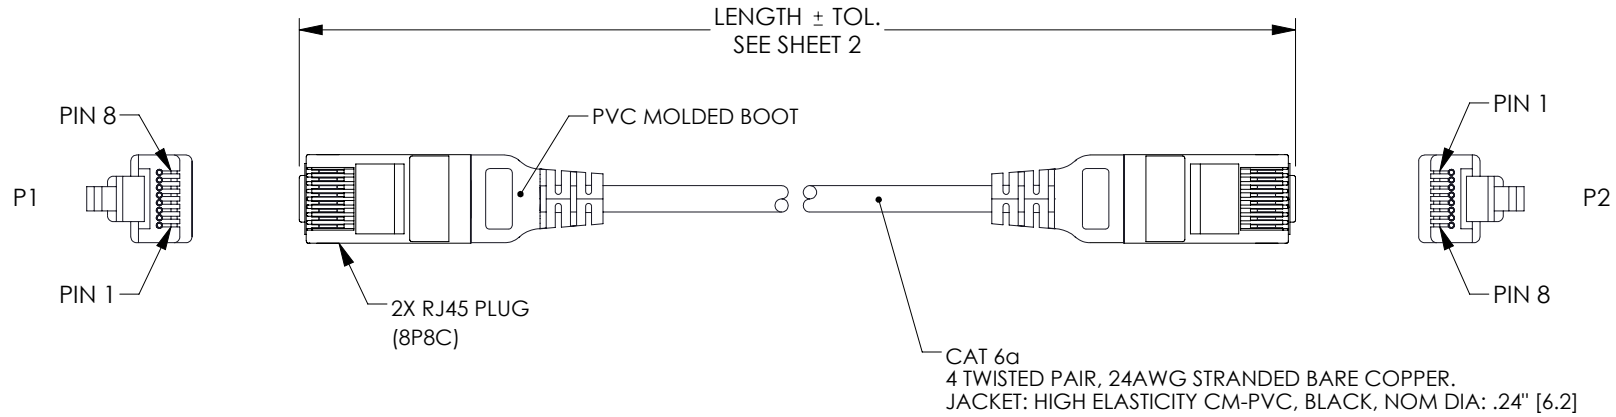

NOTES:

PHYSICAL CHARACTERISTICS:

- CABLE TYPE: CAT6a UTP
- TEMPERATURE RATING:
 - INSTALLATION: 0°C~50°C
 - OPERATION: -20°C~60°C
- VOLTAGE RATING: 30V

MECHANICAL CHARACTERISTICS:

- CONTACT MATERIAL: COPPER ALLOY, 50U" GOLD PLATING

ELECTRICAL CHARACTERISTICS:

- CONDUCTOR DC RESISTANCE: 9.58Ω/100M (MAXIMUM)
- IMPEDANCE: 100Ω
- CAPACITANCE: 5600pf/100M
- PROPAGATION DELAY: 545ns/100M (MAXIMUM)
- DELAY SKEW: 45ns/100M (MAXIMUM)
- PASS FLUKE DSX 8000 CHANNEL TEST (5%TEST)
- BANDWIDTH: 500MHZ


MISCELLANEOUS:

- CABLE ASSEMBLY TO BE TESTED FOR CONTINUITY.
- CABLE ASSEMBLY TO BE INDIVIDUALLY PACKAGED.

REGULATORY COMPLIANCE:


EU RoHS DIRECTIVE (MOST RECENT RELEASED VERSION)

WIRING MAP

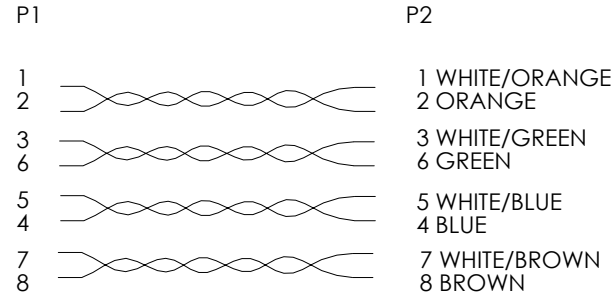

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0 ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5] FRACTIONS ± 1/32 .XX = ± .02 [.5] ANGLES ± 1° .XXX = ± .005 [.13]	APPROVALS	DATE	115 Chesterfield Industrial Blvd., Chesterfield, MO 63005 Phone: 1.888.519.9505 Fax: 1.888.519.9515
	DRAWN BY DFRISIELLO	03/02/2022	
	CHECKED BY DGUST	03/02/2022	
	APPROVED BY	03/02/2022	
THIRD-ANGLE PROJECTION	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	CATEGORY	TELECOM/MODULAR
	COLOR VARIATIONS MAY OCCUR	PRODUCT DESCRIPTION	C6a TangleFree Flexible UTP 24AWG CM PVC
	SCALE: NONE	SIZE A	CAGE CODE 3SVT8
		ITEM NO. 624TFUF	REV. A
		CAD FILE: 624TFUF.SLDDRW	SHEET 1 OF 2

PART NUMBER	COLOR	LENGTH FEET [METERS]	TOLERANCE INCH [mm]
624TFUF-0.5 BK	BLACK	0.5 [0.15]	+1.38/--.59 [+35/-15]
624TFUF-01 BK	BLACK	1.0 [0.30]	+1.38/--.59 [+35/-15]
624TFUF-02 BK	BLACK	2.0 [0.61]	+1.38/--.59 [+35/-15]
624TFUF-03 BK	BLACK	3.0 [0.91]	+1.38/--.59 [+35/-15]
624TFUF-05 BK	BLACK	5.0 [1.52]	+1.38/--.79 [+35/-20]
624TFUF-07 BK	BLACK	7.0 [2.13]	+1.38/-1.18 [+35/-30]
624TFUF-10 BK	BLACK	10.0 [3.04]	+1.38/-1.18 [+35/-30]
624TFUF-15 BK	BLACK	15.0 [4.57]	+1.38/-1.18 [+35/-30]
624TFUF-20 BK	BLACK	20.0 [6.09]	± 2.36 [60]
624TFUF-25 BK	BLACK	25.0 [7.62]	± 2.36 [60]
624TFUF-30 BK	BLACK	30.0 [9.14]	± 2.36 [60]
624TFUF-40 BK	BLACK	40.0 [12.19]	± 3.15 [80]
624TFUF-50 BK	BLACK	50.0 [15.24]	± 3.15 [80]
624TFUF-65 BK	BLACK	65.0 [19.81]	± 3.15 [80]

		115 Chesterfield Industrial Blvd., Chesterfield, MO 63005 Phone: 1.888.519.9505 Fax: 1.888.519.9515	
CATEGORY <p style="text-align: center;">TELECOM/MODULAR</p>			
PRODUCT DESCRIPTION <p style="text-align: center;">C6a TangleFree Flexible UTP 24AWG CM PVC</p>			
SIZE A	CAGE CODE 3SVT8	ITEM NO. 624TFUF	REV. A
SCALE: NONE		CAD FILE: 624TFUF.SLDDRW	
			SHEET 2 OF 2