


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SHOW ME CABLES, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF SHOW ME CABLES, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	03/14/2022	GUITADAURO

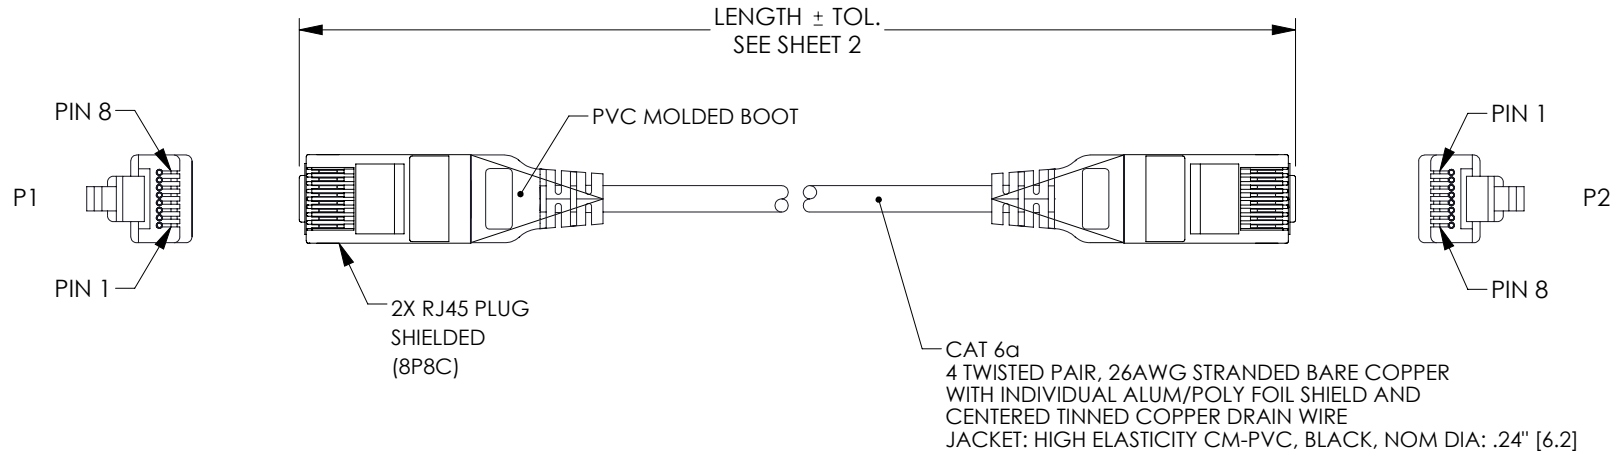

**NOTES:**

**PHYSICAL CHARACTERISTICS:**

- CABLE TYPE: CAT6a U/FTP
- TEMPERATURE RATING:
  - INSTALLATION: 0°C~50°C
  - OPERATION: -20°C~60°C
- VOLTAGE RATING: 30V

**MECHANICAL CHARACTERISTICS:**

- CONTACT MATERIAL: COPPER ALLOY, 50U" GOLD PLATING

**ELECTRICAL CHARACTERISTICS:**


- CONDUCTOR DC RESISTANCE: 15.2Ω/100M (MAXIMUM)
- IMPEDANCE: 100Ω
- CAPACITANCE: 5600pf/100M
- PROPAGATION DELAY: 545ns/100M (MAXIMUM)
- DELAY SKEW: 45ns/100M (MAXIMUM)
- PASS FLUKE DSX 8000 CHANNEL TEST (5%TEST)
- BANDWIDTH: 500MHz

**MISCELLANEOUS:**

- CABLE ASSEMBLY TO BE TESTED FOR CONTINUITY.
- CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED.


**REGULATORY COMPLIANCE:**

EU ROHS DIRECTIVE (MOST RECENT RELEASED VERSION)

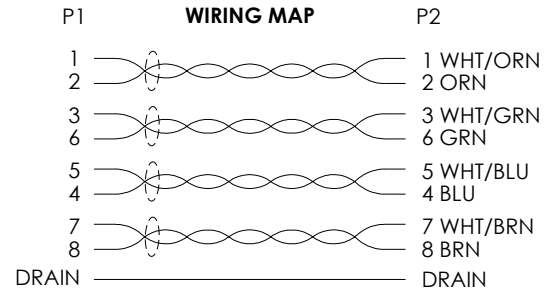

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0 ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5]   FRACTIONS ± 1/32 .XX = ± .02 [.5]   ANGLES ± 1° .XXX = ± .005 [1.3]	APPROVALS	DATE		115 Chesterfield Industrial Blvd., Chesterfield, MO 63005 Phone: 1.888.519.9505 Fax: 1.888.519.9515
	DRAWN BY DFRISIELLO	03/14/2022		
THIRD-ANGLE PROJECTION 	CHECKED BY DGUST	03/14/2022	CATEGORY TELECOM/MODULAR	
	APPROVED BY GUITADAURO	03/14/2022	PRODUCT DESCRIPTION C6a TangleFree Flexible U/FTP 26AWG CM PVC	
	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY		SIZE <b>A</b>	CAGE CODE <b>3SVT8</b>
	COLOR VARIATIONS MAY OCCUR		ITEM NO. 626TFUF	REV. <b>A</b>
			SCALE: NONE	CAD FILE: 626TFUF.SLDDRW
				SHEET 1 OF 2

PART NUMBER	COLOR	LENGTH FEET [METERS]	TOLERANCE INCH [mm]
626TFUF-0.5 BK	BLACK	0.5 [0.15]	+1.38/-.59 [+35/-15]
626TFUF-01 BK	BLACK	1.0 [0.30]	+1.38/-.59 [+35/-15]
626TFUF-02 BK	BLACK	2.0 [0.61]	+1.38/-.59 [+35/-15]
626TFUF-03 BK	BLACK	3.0 [0.91]	+1.38/-.59 [+35/-15]
626TFUF-05 BK	BLACK	5.0 [1.52]	+1.38/-.79 [+35/-20]
626TFUF-07 BK	BLACK	7.0 [2.13]	+1.38/-1.18 [+35/-30]
626TFUF-10 BK	BLACK	10.0 [3.04]	+1.38/-1.18 [+35/-30]
626TFUF-15 BK	BLACK	15.0 [4.57]	+1.38/-1.18 [+35/-30]
626TFUF-20 BK	BLACK	20.0 [6.09]	± 2.36 [60]
626TFUF-25 BK	BLACK	25.0 [7.62]	± 2.36 [60]
626TFUF-30 BK	BLACK	30.0 [9.14]	± 2.36 [60]
626TFUF-40 BK	BLACK	40.0 [12.19]	± 3.15 [80]
626TFUF-50 BK	BLACK	50.0 [15.24]	± 3.15 [80]
626TFUF-65 BK	BLACK	65.0 [19.81]	± 3.15 [80]

		115 Chesterfield Industrial Blvd., Chesterfield, MO 63005 Phone: 1.888.519.9505 Fax: 1.888.519.9515	
CATEGORY <p style="text-align: center;"><b>TELECOM/MODULAR</b></p>			
PRODUCT DESCRIPTION <p style="text-align: center;"><b>C6a TangleFree Flexible U/FTP 26AWG CM PVC</b></p>			
SIZE <b>A</b>	CAGE CODE <b>3SVT8</b>	ITEM NO. <b>626TFUF</b>	REV. <b>A</b>
SCALE: NONE		CAD FILE: 626TFUF.SLDRW	
			SHEET 2 OF 2