
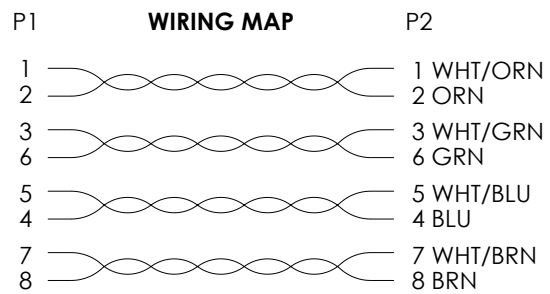


8 7 6 5 4 3 2 1

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SHOW ME CABLES, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF SHOW ME CABLES, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	01-04-2021	GUTTADAURO

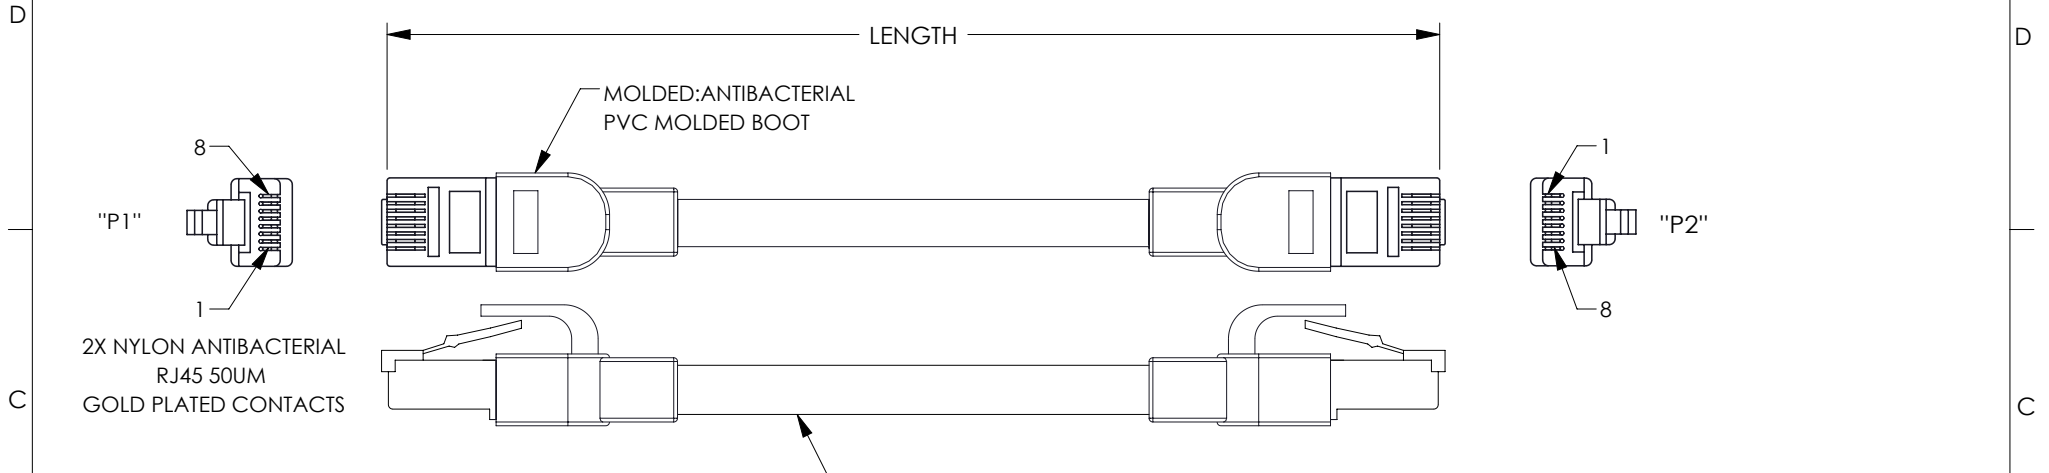

PART NUMBER	LENGTH FEET [METERS]
695A-0.5 WH	0.5 [0.15]
695A-01 WH	1.0 [0.30]
695A-02 WH	2.0 [0.60]
695A-03 WH	3.0 [0.91]
695A-05 WH	5.0 [1.52]
695A-07 WH	7.0 [2.13]
695A-10 WH	10.0 [3.04]
695A-15 WH	15.0 [4.57]
695A-20 WH	20.0 [6.09]
695A-25 WH	25.0 [7.62]
695A-50 WH	50.0 [15.24]
695A-60 WH	60.0 [18.28]
695A-70 WH	70.0 [21.33]
695A-80 WH	80.0 [24.38]
695A-100 WH	100.0 [30.48]

NOTES:

ANTIBACTERIAL TEST METHOD:
ISO 22196:2011 MEASUREMENT OF ANTIBACTERIAL ACTIVITY ON PLASTICS AND OTHER NON-POROUS SURFACES.

TEST ORGANISM:
ESCHERICHIA COLI ATCC 8738
STAPHYLOCOCCUS AUREUS ATCC 6538P

ANTIBACTERIAL ACTIVITY RATE:
ESCHERICHIA COLI > 99.9%
STAPHYLOCOCCUS AUREUS > 99.9%

MISCELLANEOUS:
CABLE ASSEMBLY TO BE TESTED FOR CONTINUITY.
CABLE ASSEMBLY TO BE INDIVIDUALLY PACKAGED.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0 ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5] FRACTIONS ± 1/32 .XX = ± .02 [.5] ANGLES ± 1° .XXX = ± .005 [.13]	APPROVALS DRAWN BY MVEERAPPAN CHECKED BY SPAN APPROVED BY GUTTADAURO	DATE 01-04-2021 01-04-2021 01-04-2021	115 Chesterfield Industrial Blvd., Chesterfield, MO 63005 Phone: 1.888.519.9505 Fax: 1.888.519.9515	
	THIRD-ANGLE PROJECTION 			CATEGORY TELECOM/MODULAR
	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY COLOR VARIATIONS MAY OCCUR		PRODUCT DESCRIPTION Cat6A Antibacterial UTP RJ45 24STR CM PVC WHT	SIZE A CAGE CODE 3SVT8 ITEM NO. 695A-XX WH
	SCALE: NONE CAD FILE: 695A-XX WH.SLDDRW		SHEET 1 OF 1	