


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SHOW ME CABLES, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF SHOW ME CABLES, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	03/04/2022	GUTTADAURO

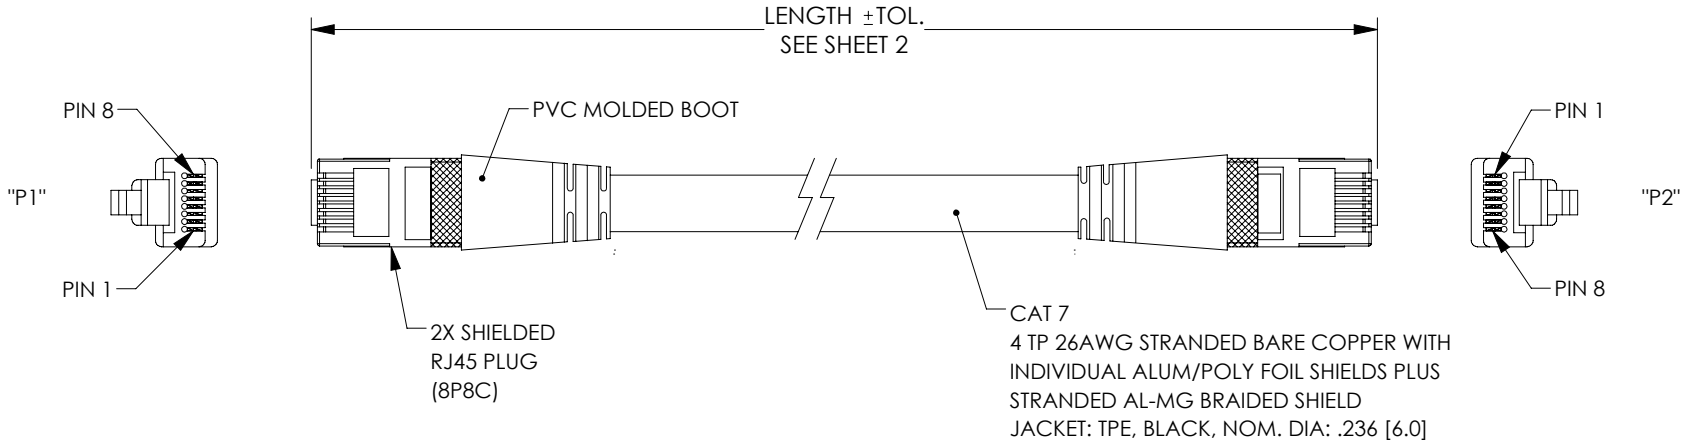

**NOTES:**

**PHYSICAL CHARACTERISTICS:**

- CABLE TYPE: CAT7 S/FTP
- TEMPERATURE RATING:
  - INSTALLATION: -20°C~60°C
  - OPERATION: -40°C~80°C
- VOLTAGE RATING: 30V
- DURABILITY: 1 MILLION CYCLES AT 10X O.D.
- UV, OIL AND WELD SPLATTER RESISTANT JACKET.

**MECHANICAL CHARACTERISTICS:**

- CONTACT MATERIAL – COPPER ALLOY, 50U" GOLD PLATING

**ELECTRICAL CHARACTERISTICS:**


- CONDUCTOR DC RESISTANCE: 15.2Ω/100M (MAXIMUM)
- IMPEDANCE: 100Ω
- CAPACITANCE: 5600pf/100M
- PROPAGATION DELAY: 545ns/100M (MAXIMUM)
- DELAY SKEW: 45ns/100M (MAXIMUM)
- PASS FLUKE DSX 8000 CHANNEL TEST (5%TEST)
- BANDWIDTH: 600MHZ

**MISCELLANEOUS:**

- CABLE ASSEMBLY TO BE TESTED FOR CONTINUITY.
- CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED.


**REGULATORY COMPLIANCE:**

EU RoHS DIRECTIVE (MOST RECENT RELEASED VERSION)

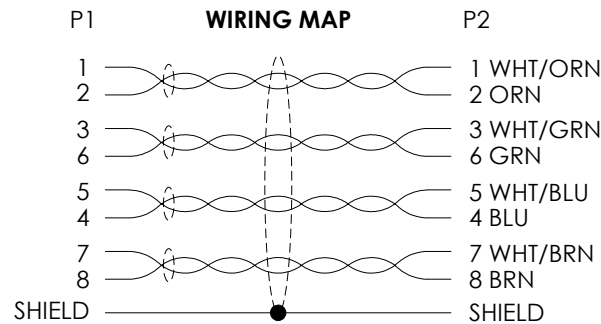

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0 ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5]   FRACTIONS ± 1/32 .XX = ± .02 [5]   ANGLES ± 1° .XXX = ± .005 [1.3]	APPROVALS DRAWN BY DFRISIELLO CHECKED BY DGUST APPROVED BY	DATE 03/04/2022 03/04/2022 03/04/2022	 115 Chesterfield Industrial Blvd., Chesterfield, MO 63005 Phone: 1.888.519.9505 Fax: 1.888.519.9515	
	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY		CATEGORY TELECOM/MODULAR	
	THIRD-ANGLE PROJECTION 		PRODUCT DESCRIPTION Cat7 S/FTP 26AWG IND-OD-HF TPE	SIZE <b>A</b>
	COLOR VARIATIONS MAY OCCUR	CAGE CODE <b>3SVT8</b>	ITEM NO. 726SFTPO	REV. <b>A</b>
SCALE: NONE		CAD FILE: 726SFTPO.SLDDRW		
SHEET 1 OF 2			SHEET 1 OF 2	

PART NUMBER	COLOR	LENGTH FEET [METERS]	TOLERANCE INCH [mm]
726SFTPO-0.5 BK	BLACK	0.5 [0.15]	+1.38/-.59 [+35/-15]
726SFTPO-01 BK	BLACK	1.0 [0.30]	+1.38/-.59 [+35/-15]
726SFTPO-03 BK	BLACK	3.0 [0.91]	+1.38/-.59 [+35/-15]
726SFTPO-05 BK	BLACK	5.0 [1.52]	+1.38/-.79 [+35/-20]
726SFTPO-07 BK	BLACK	7.0 [2.13]	+1.38/-1.18 [+35/-30]
726SFTPO-10 BK	BLACK	10.0 [3.04]	+1.38/-1.18 [+35/-30]
726SFTPO-15 BK	BLACK	15.0 [4.57]	+1.38/-1.18 [+35/-30]
726SFTPO-25 BK	BLACK	25.0 [7.62]	± 2.36 [ 60]
726SFTPO-30 BK	BLACK	30.0 [9.14]	± 3.15 [80]
726SFTPO-40 BK	BLACK	40.0 [12.19]	± 3.15 [80]
726SFTPO-50 BK	BLACK	50.0 [15.24]	± 3.15 [80]
726SFTPO-65 BK	BLACK	65.0 [19.81]	± 3.15 [80]
726SFTPO-75 BK	BLACK	75.0 [22.86]	± 3.15 [80]
726SFTPO-100 BK	BLACK	100.0 [30.48]	± 3.15 [80]

		115 Chesterfield Industrial Blvd., Chesterfield, MO 63005 Phone: 1.888.519.9505 Fax: 1.888.519.9515	
CATEGORY <p style="text-align: center;">TELECOM/MODULAR</p>			
PRODUCT DESCRIPTION <p style="text-align: center;">Cat7 S/FTP 26AWG IND-OD-HF TPE</p>			
SIZE <b>A</b>	CAGE CODE <b>3SVT8</b>	ITEM NO. <b>726SFTPO</b>	REV. <b>A</b>
SCALE: NONE		CAD FILE: 726SFTPO.SLDDRW	
		SHEET 2 OF 2	