

6

5


4

3

2

1

85-660-423 CONSISTS OF 1000 FEET OF CONTINUOUS LENGTH OF BULK CABLE

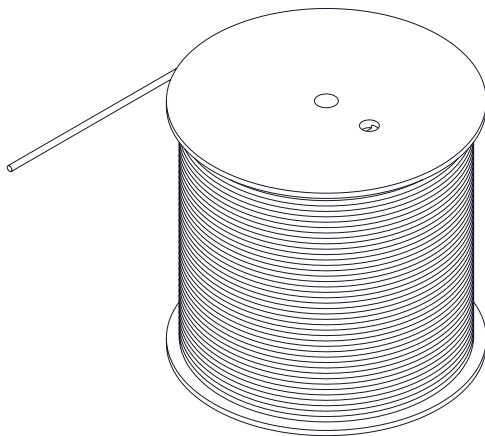

NOTES:

1. CONSTRUCTION:

CONDUCTOR: 26 AWG 7/34 STRANDED TINNED COPPER
 INSULATION: FOAMED FEP, .010" NOM. WALL THICKNESS
 PAIRS: COLOR CODED SINGLES TWISTED INTO PAIRS
 CABLE: (4) TWISTED PAIRS TWISTED TOGETHER TO FORM A CABLE CORE.
 SHIELD: AN ALUMINIZED POLYESTER ALUMINUM FOIL SHIELD (100% COVERAGE)
 WITH 7 ENDS OF 34AWG TINNED COPPER DRAIN WIRE IN CONTACT WITH
 METALIZED SURFACE SHALL BE APPLIED OVER THE CABLE CORE.
 JACKET: LOW SMOKE POLYVINYLCHLORIDE, COLOR: SEE CHART 1, .021" NOM. WALL
 THICKNESS OVERALL CABLE DIAMETER

NOM. DIA.

.0189"
 .039"
 .078"

.181"

.233" NOM.
 (BY CALIPER)

2. PHYSICAL PROPERTIES:

TEMPERATURE RATING, MAX: +105 ° C
 TEMPERATURE RATING, MIN: -20 ° C
 WT./M', NOM., NET.: 22.2 LBS.

3. ELECTRICAL CHARACTERISTICS: SEE SHEET 2

4. AGENCY APPROVALS:

NEC (ETL) TYPE CMP
 CEC C(ETL) TYPE CMP

5. APPLICATION:

RoHS COMPLIANT MATERIALS. MEETS TIA 568.2-D CAT 6A CHANNEL REQUIREMENTS AT 70 METERS.
 10 METERS OF PATCH CABLE WITH A 90 METERS PERMANENT LINK (100 METER CHANNEL).
 SUPPORTS CAT 6A APPLICATIONS INCLUDING 10GBASE-T AT THESE LENGTHS, FOR OTHER
 COMBINATIONS SEE "CHANNEL REQUIREMENTS AND THE LENGTH OF STRANDED CABLE"
 TECHNICAL BRIEF. PATENT NO. US 9,355,759 B2

6. JACKET PRINT(WHITE INK ON BLACK JACKET, ALL OTHERS BLACK INK):

QUABBIN DATAMAX LSZH 6a F/UTP PATCH CORD P/N (QWC P/N PER CHART 1)-- PATENT NO. US 9,355,759
 B2 -- C(ETL)US TYPE CMP 26 AWG 105C -- RoHS -- (LOT DESIGNATOR)(SEQUENTIAL FOOTAGE)


7. PACKAGING:

CABLE SHIPPED ON A REEL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF INFINITE ELECTRONICS, INC. ANY REPRODUCTION IN PART OR WHOLE
 WITHOUT THE WRITTEN PERMISSION OF INFINITE ELECTRONICS, INC. IS PROHIBITED. THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE
 EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW
 PROHIBITED.

REVISION					
ZONE	REV	DESCRIPTION	DATE	CHANGED BY	APPROVED
	A	INITIAL RELEASE	12/19/2023	DFRISIELLO	GUTTADAURO

CROSS-SECTIONAL VIEW

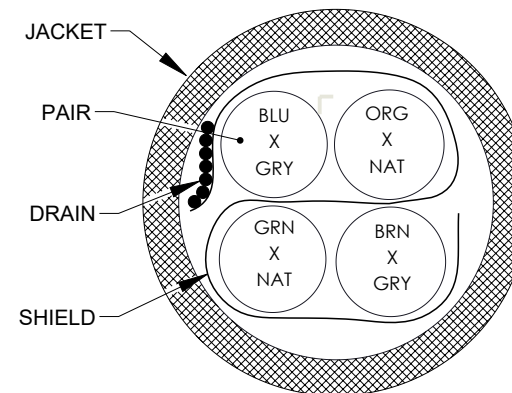

COLOR CODE
 BLUE x GRAY
 ORANGE x NATURAL
 GREEN x NATURAL
 BROWN x GRAY

CHART 1

PART NUMBER	JACKET COLOR
85-660-423-GY	GRAY
85-660-423-WH	WHITE
85-660-423-BL	BLU
85-660-423-GN	GREEN

UNLESS OTHERWISE SPECIFIED
 LEADING DIMENSIONS ARE INCHES
 DIMENSIONS IN [] ARE MILLIMETERS

TOLERANCES:
 .X = ±.2 [5] FRACTIONS
 .XX = ±.02 [0.5] ± 1/32
 .XXX = ±.005 [0.13] ANGLES ± 1°

CABLE LENGTH TOLERANCES:
 ≤12 [305] = +1 [25] / -0
 >12 [305] ≤ 60 [1524] = +2 [51] / -0
 >60 [1524] ≤ 120 [3048] = +4 [102] / -0
 >120 [3048] ≤ 300 [7620] = +6 [152] / -0
 >300 [7620] = +5% / -0

ALL DIMENSIONS ARE FOR REFERENCE ONLY
 AND SUBJECT TO CHANGE WITHOUT NOTICE.
 UN-DIMENSIONED NON-CRITICAL FEATURES
 MAY VARY IN SIZE AND LOCATION
 COLORS MAY VARY

Show Me
CABLES

an INFINIT® brand

Website: www.ShowMeCables.com
 Phone: 1.888.519.9505



INTERPRET ALL DIMENSIONS AND
 TOLERANCES PER ASME Y14.5

SCALE SHEET

NONE 1 OF 2

DESCRIPTION

C6a F/UTP CMP +105C 26AWG 1K FT

SIZE	CAGE CODE	DRAWN BY	ITEM NO.	REV
A	3SVT8	DFRISIELLO	85-660-423	A

6

5

4

3

2

1

3. ELECTRICAL CHARACTERISTICS:

CAPACITANCE, MUTUAL, NOM.	13.5PF/FT AT 1MHz
DIELECTRIC WITHSTANDING, MIN.	1500V RMS
VOLTAGE RATING, MAX.	300V
D.C. RESISTANCE, MAX.	14 OHM (42.6 OHM/1000 FT NOM.)


NOTE: TESTING FOR THE FOLLOWING IS CONDUCTED OFF THE REEL (FOR 100m OF CABLE)

IMPEDANCE, NOM.	100 ± 15 OHM 1-100 MHz	
	100 ± 20 OHM 100-500 MHz	
RETURN LOSS	1 ≤ f < 10 MHz	20 + 5 LOG(f) dB MIN
	10 ≤ f < 20 MHz	25 dB MIN
	20 ≤ f ≤ 500 MHz	25 - 8.6 LOG(f/20) dB MIN
PS NEXT	1 ≤ f ≤ 500 MHz	42.3 - 15 LOG(f/100) dB MIN
NEXT	1 ≤ f ≤ 500 MHz	44.3 - 15 LOG(f/100) dB MIN
PS ACRF	1 ≤ f ≤ 500 MHz	24.8 - 20 LOG(f/100) dB MIN
ACRF	1 ≤ f ≤ 500 MHz	27.8 - 20 LOG(f/100) dB MIN
INSERTION LOSS	1 ≤ f ≤ 500 MHz	1.5[1.82SqRt(f) + 0.0091(f) + 0.25/SqRt(f)] dB MAX
DELAY	1 ≤ f ≤ 500 MHz	534 + 36/SqRt(f) ns MAX
DELAY SKEW	1 ≤ f ≤ 500 MHz	< 45 ns
PS ANEXT LOSS (6 AROUND 1)	1 ≤ f ≤ 500 MHz	62.5 - 15 LOG(f/100) dB 50-500 MHz 67 dB 1-50 MHz
PS AFEXT (6 AROUND 1)	1 ≤ f ≤ 500 MHz	38.2 - 20 LOG(f/100) dB, 67 dB MIN
TCL	1 ≤ f ≤ 500 MHz	30 - 10 LOG(f/100) dB MIN, 40 dB MIN
ELTCTL	1 ≤ f ≤ 30 MHz	35 - 20 LOG(f) dB MIN
VELOCITY OF PROPAGATION	68%	

Show Me™
CABLES

an INFINIT® brand

Website: www.ShowMeCables.com
Phone: 1.888.519.9505



INTERPRET ALL DIMENSIONS AND TOLERANCES PER ASME Y14.5

SCALE	SHEET
NONE	2 OF 2

DESCRIPTION

C6a F/UTP CMP +105C 26AWG 1K FT

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF INFINITE ELECTRONICS, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF INFINITE ELECTRONICS, INC. IS PROHIBITED. THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.

ALL DIMENSIONS ARE FOR REFERENCE ONLY AND SUBJECT TO CHANGE WITHOUT NOTICE. UN-DIMENSIONED NON-CRITICAL FEATURES MAY VARY IN SIZE AND LOCATION. COLORS MAY VARY.

SIZE	CAGE CODE	DRAWN BY	ITEM NO.	REV
A	3SVT8	DFRISIELLO	85-660-423	A