


E134689  AWM 2464 80°C 300V VW-1 RoHS COMPLIANT

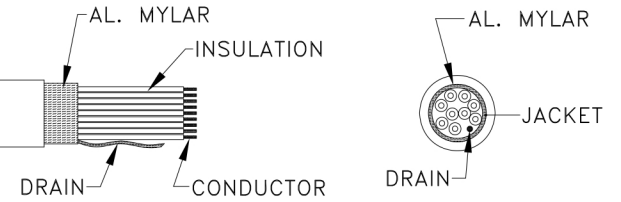

CONSTRUCTION			ELECTRICAL CHARACTERISTICS	
CONDUCTOR	AWG	26 AWG	RATING: TEMP. 80°C VOLTAGE: 300V	
	MATERIAL	STRANDED TINNED COPPER	CONDUCTOR RESISTANCE: AT 20°C MAX	
	COND. SIZE	7/0.16mm	26AWG: 148.94Ω/km	
INSULATION	MIN. AVG. THICK	0.23mm	INSULATION RESISTANCE: 10MΩ/km MIN. at 20°C DC 500V	
	MATERIAL	SR-PVC	DIELECTRIC STRENGTH: AC 2000V/1minute no breakdown	
	O.D.	1.00±0.05mm		
FACE OUTSIDE AL. MYLAR	COVERAGE	100%		
	OVERLAP	25% MIN.		
DRAIN	AWG	24 AWG		
	MATERIAL	TINNED COPPER		
	SIZE	7/0.20mm		
JACKET	MIN. ACQ. THICK	0.76mm		
	MATERIAL	HALF MATT PVC		
	COLOR	BEIGE		
	O.D.	5.00 ±0.15mm		

COLOR CODE			
1C	BLACK	6C	GREEN
2C	BRWON	7C	BLUE
3C	RED	8C	PURPLE
4C	ORANGE	9C	GRAY
5C	YELLOW		

Show Me
CABLES
an INFINIT brand

DESCRIPTION:	9 Conductor 26 AWG Stranded PVC Cable	CHK:	APRVD:	REV.:	DWG BY: Catherine
COLOR:	SEE TABLE	THIS DRAWING IS THE EXCLUSIVE PROPERTY OF SHAXON INDUSTRIES, INC. ITS ACCEPTANCE CONSTITUTES AN AGREEMENT THAT SHOULD BE TREATED AS A STRICTLY CONFIDENTIAL DOCUMENT TO BE USED FOR NO OTHER PURPOSE THAN TO AID IN THE ASSEMBLY OR OPERATION OF UNITS FURNISHED BY OR FOR SHAXON IND. INC. OR OTHERWISE AS EXPRESSLY AUTHORIZED IN WRITING BY SHAXON IND. INC. THAT IT IS RETURNED UPON REQUEST AND IS NOT TO BE COMMUNICATED, DISCLOSED OR COPIED EXCEPT AS EXPRESSLY AUTHORIZED IN WRITING BY SHAXON INDUSTRIES INC. AutoCAD Release 12 c1a, Serial #: 110-10626948			DATE: 11/3/2007
MATERIAL:	SEE TABLE				DO NOT SCALE
DWG NO.	C.A. 0040				PART NO.: 87-409-126 GY