
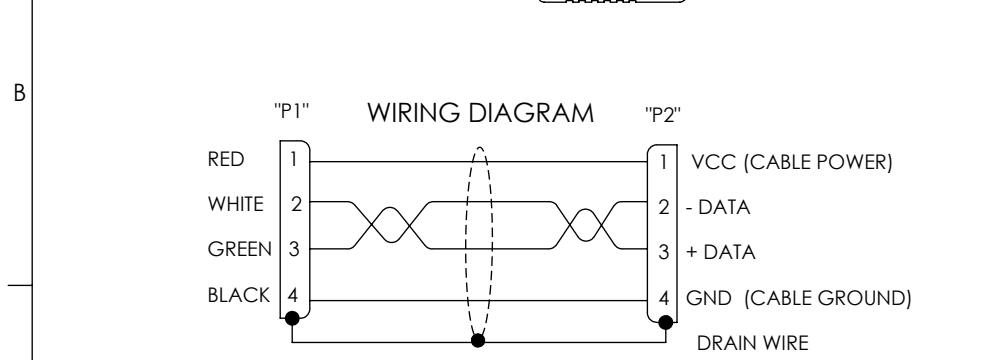


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

RoHS Compliant ✓

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	10/13/10	D.GRIFFIN
B	ECN 5868: ADDED LENGTHS 03 M, 075 M, AND 4 M	12/1/11	D.FRISIELLO
C	ECN6237: ADDED CONTACT PLATING NOTE. UPDATED FORMAT.	09/13/12	DFP

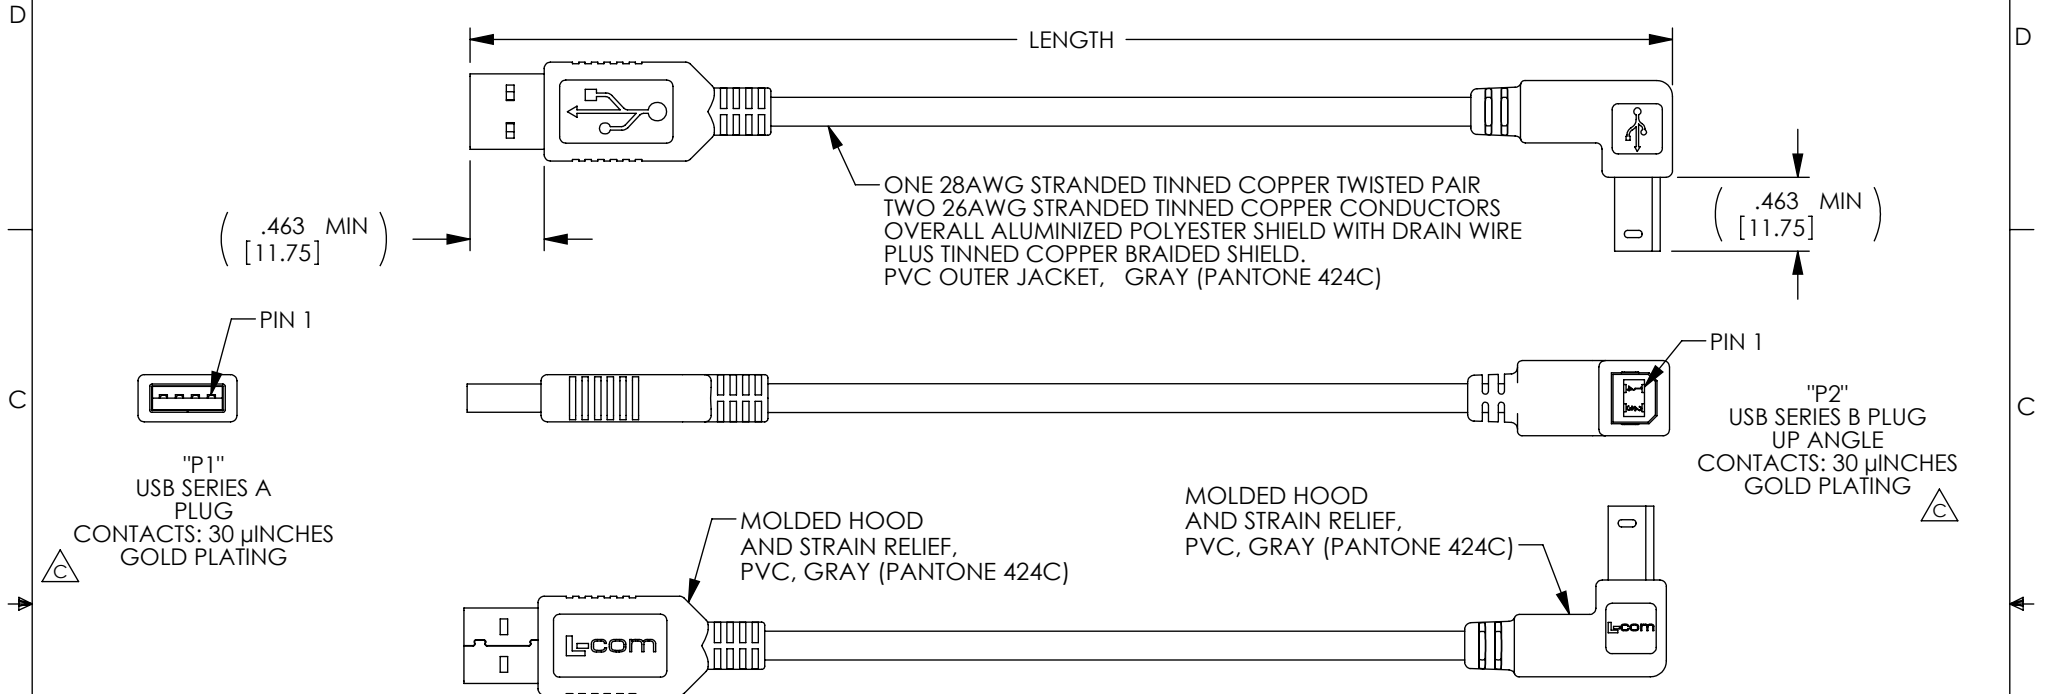

PART NUMBER	LENGTH	
	METERS	FEET
CAA-90UB-03M	0.3	.98
CAA-90UB-05M	0.5	1.64
CAA-90UB-075M	0.75	2.46
CAA-90UB-1M	1.0	3.28
CAA-90UB-2M	2.0	6.56
CAA-90UB-3M	3.0	9.84
CAA-90UB-4M	4.0	13.12
CAA-90UB-5M	5.0	16.40

NOTES:

1. CABLE ASSEMBLY SHALL HAVE 360° SHIELD TERMINATION.
2. CABLE ASSEMBLY SHALL MEET USB 2.0 REQUIREMENTS.
3. CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
4. CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +3% / -0%	APPROVALS	DATE		45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845
	DRAWN BY D. CASTRO	9/29/10		CATEGORY
ALL OTHER DIMENSIONAL TOLERANCES: .X = ±.2 .XX = ±.02 .XXX = ±.005	CHECKED BY D. PARHAM	9/30/10	PRODUCT DESCRIPTION	CA USB STR A/90UP B DX
PROJECTION	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	APPROVED BY S. SMITH	SIZE A	FSCM NO. 43321
	COLOR VARIATIONS MAY OCCUR	9/30/10	DWG. NO. CAA-90UB	REV. C
			SCALE: NONE	CAD FILE: CAA-90UB.SLDDRW
				SHEET 1 OF 1