


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	04/22/2022	GUTTADAURO

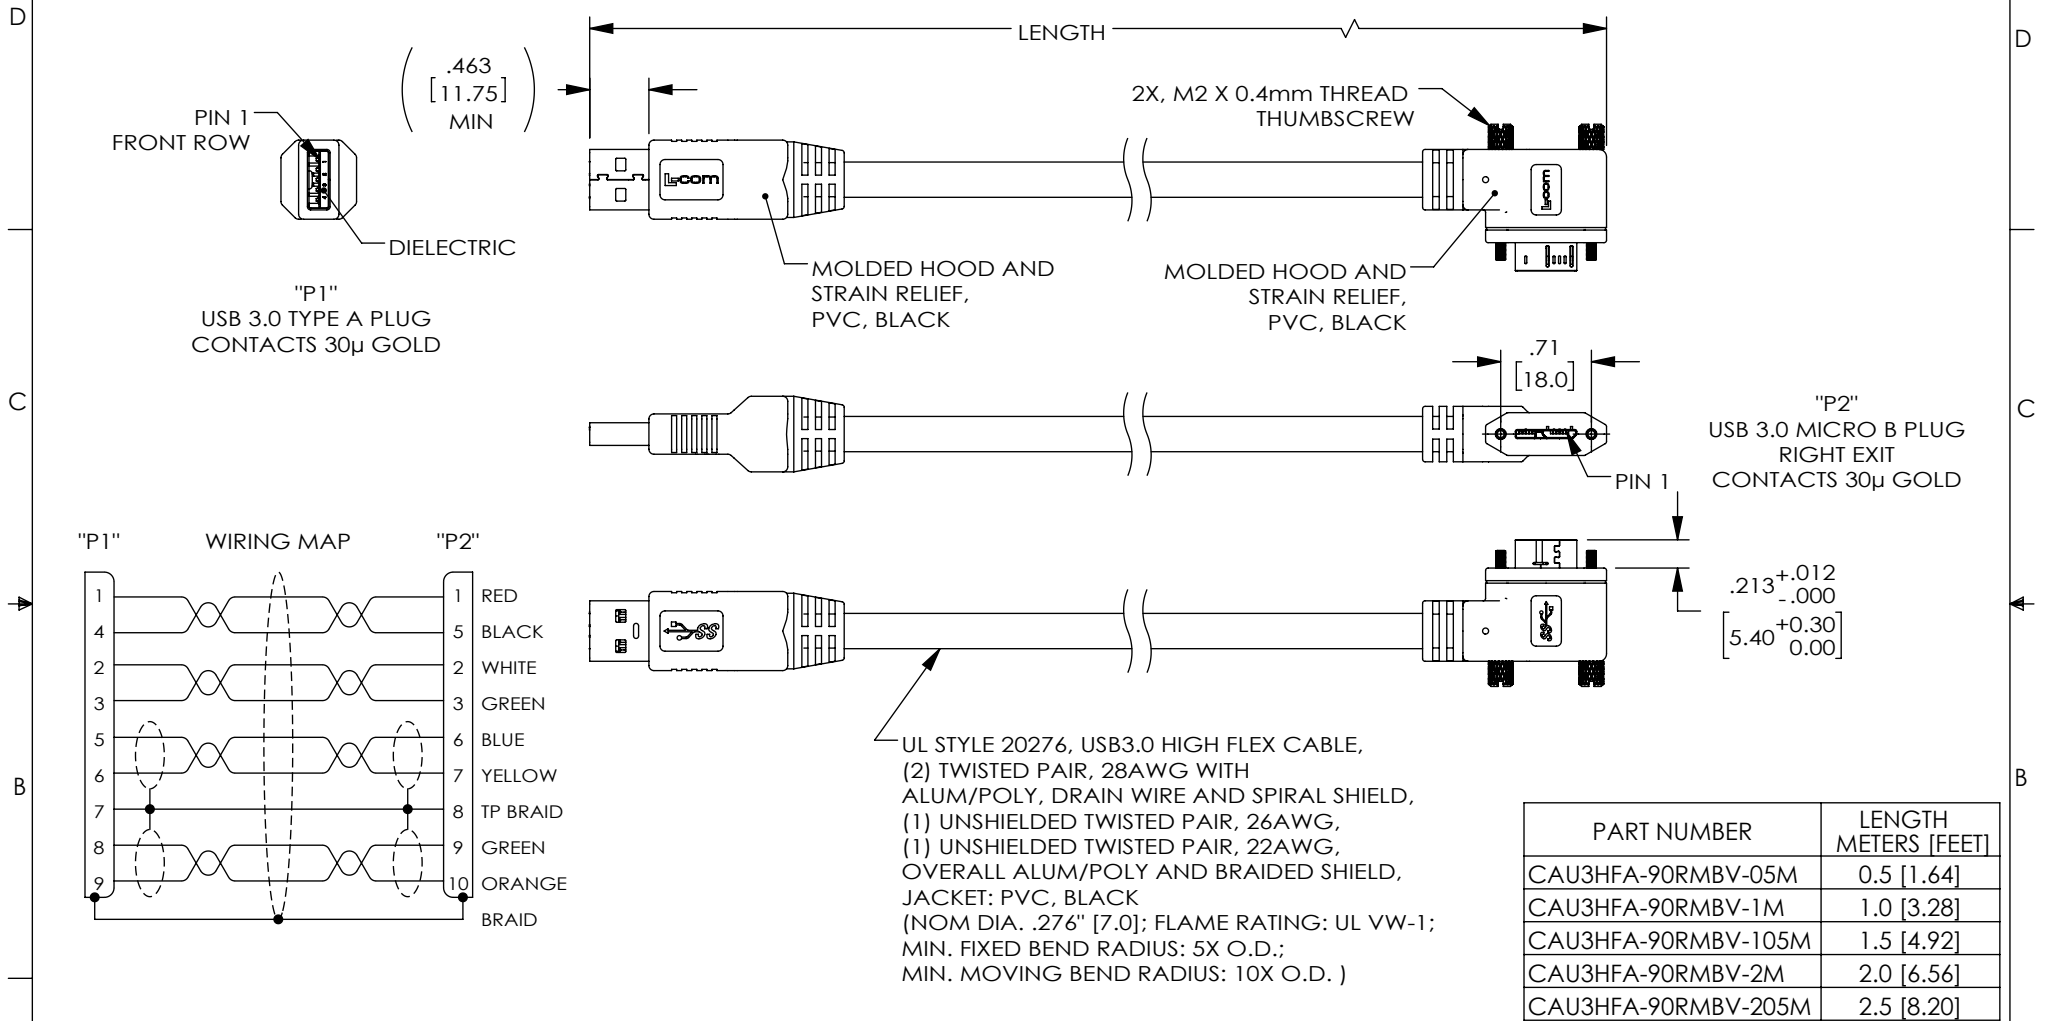

- NOTES:**
1. CABLE TYPE-U DRAG CHAIN TESTING: 5 MILLION CYCLES MIN.(75mm BEND RADIUS)
  2. CABLE ASSEMBLY SHALL HAVE 360° SHIELD TERMINATION.
  3. CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
  4. CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0 ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5]   FRACTIONS ± 1/32 .XX = ± .02 [.5]   ANGLES ± 1° .XXX = ± .005 [.13]	APPROVALS SLI CHECKED BY GUTTADAURO APPROVED BY GUTTADAURO	DATE 01/17/2022 01/17/2022 01/17/2022	50 High Street, West Mill, North Andover, MA 01845 USA. Phone: 1.800.341.5266 1.978.682.6936	
	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY COLOR VARIATIONS MAY OCCUR	CATEGORY USB		PRODUCT DESCRIPTION CA HI-FLEX USB3.0 A/90RT MICB W/HDW
THIRD-ANGLE PROJECTION 	SIZE <b>A</b>	CAGE CODE <b>43321</b>	DWG. NO. <b>CAU3HFA-90RMBV</b>	REV. <b>A</b>
SCALE: NONE		CAD FILE: CAU3HFA-90RMBV.SLDDRW		SHEET 1 OF 1