




8 7 6 5 4 3 2 1

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.



REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
E	ECN 7225: CHG'D SR FROM TPU TO LSZH, ROHS NOTE	1/8/14	D.FRISIELLO

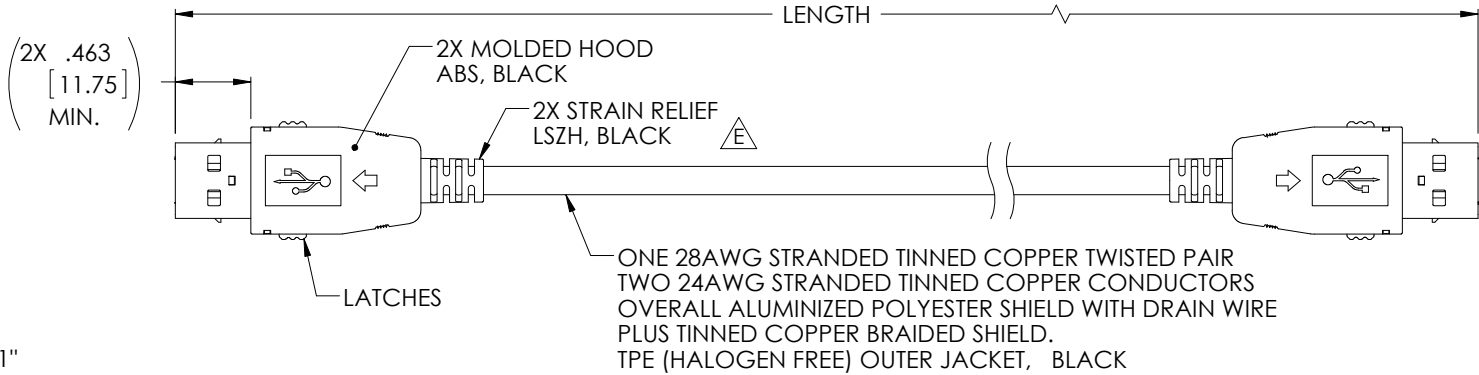

ONE 28AWG STRANDED TINNED COPPER TWISTED PAIR
 TWO 24AWG STRANDED TINNED COPPER CONDUCTORS
 OVERALL ALUMINIZED POLYESTER SHIELD WITH DRAIN WIRE
 PLUS TINNED COPPER BRAIDED SHIELD.
 TPE (HALOGEN FREE) OUTER JACKET, BLACK



2X USB SERIES "A"
 LATCHING PLUG
 CONTACTS: 30 μINCHES
 GOLD PLATING

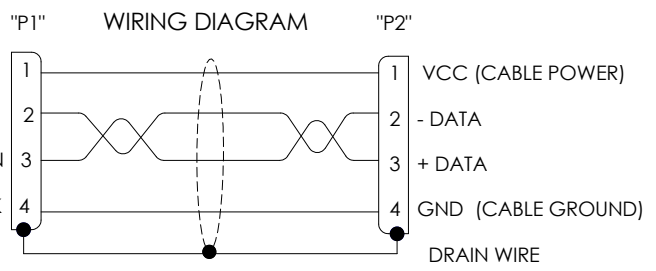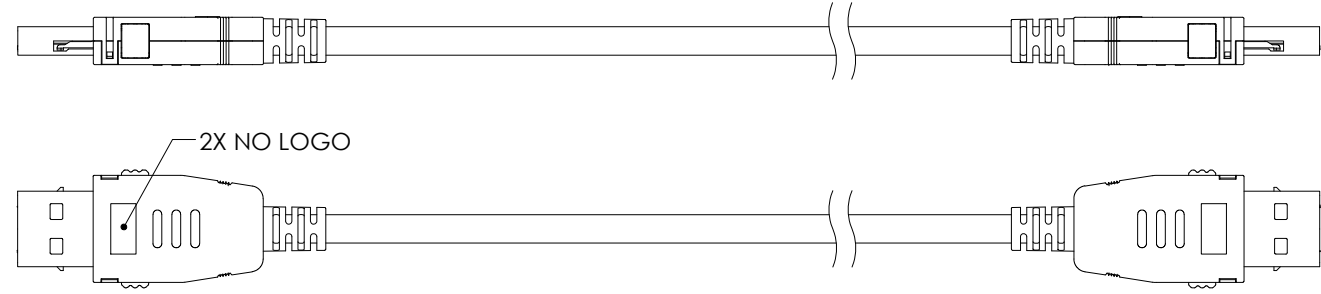

MODEL NUMBER	LENGTH METERS [FEET]
CAUZALAL-03M	0.3 [.98]
CAUZALAL-05M	0.5 [1.64]
CAUZALAL-075M	0.75 [2.46]
CAUZALAL-1M	1.0 [3.28]
CAUZALAL-2M	2.0 [6.56]
CAUZALAL-3M	3.0 [9.84]
CAUZALAL-4M	4.0 [13.12]
CAUZALAL-5M	5.0 [16.40]

- NOTES:**
1. CABLE ASSEMBLY SHALL HAVE 360° SHIELD TERMINATION.
 2. CABLE ASSEMBLY SHALL MEET USB 2.0 REQUIREMENTS.
 3. CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
 4. CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

REGULATORY COMPLIANCE:
 CE2011/65/EU (RoHS DIRECTIVE)

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm]

OVERALL CABLE LENGTH TOLERANCE:
 ≤12 [305] = +1 [25] / -0
 >12 [305] ≤60 [1524] = +2 [51] / -0
 >60 [1524] ≤120 [3048] = +4 [102] / -0
 >120 [3048] ≤300 [7620] = +6 [152] / -0
 >300 [7620] = +5% / -0%

ALL OTHER DIMENSIONAL TOLERANCES:
 .X = ± .2 [5.08]
 .XX = ± .02 [1.51]
 .XXX = ±.005 [1.13]

PROJECTION

APPROVALS: D. CASTRO (11/3/10), D. PARHAM (12/9/10), S. SMITH (12/9/10)

DATE: 11/3/10, 12/9/10, 12/9/10

L-com Global Connectivity

45 BEECHWOOD DRIVE
 NORTH ANDOVER, MA 01845

CATEGORY: USB

PRODUCT DESCRIPTION: CA,USB A/A LSZH LATCH BLK

SIZE: A, FSCM NO.: 43321, DWG. NO.: CAUZALAL, REV.: E

SCALE: NONE, CAD FILE: CAUZALAL.SLDRW, SHEET 1 OF 1