


8 7 6 5 4 3 2 1


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
E	ECN 6991: UPD CONNECTOR PICTORALLY, ROHS NOTE	8/2/13	D_DESJARDIN
F	ECN 7220: CHG'D TPU TO LSZH, ADDED ROHS	1/7/14	D.FRISIELLO

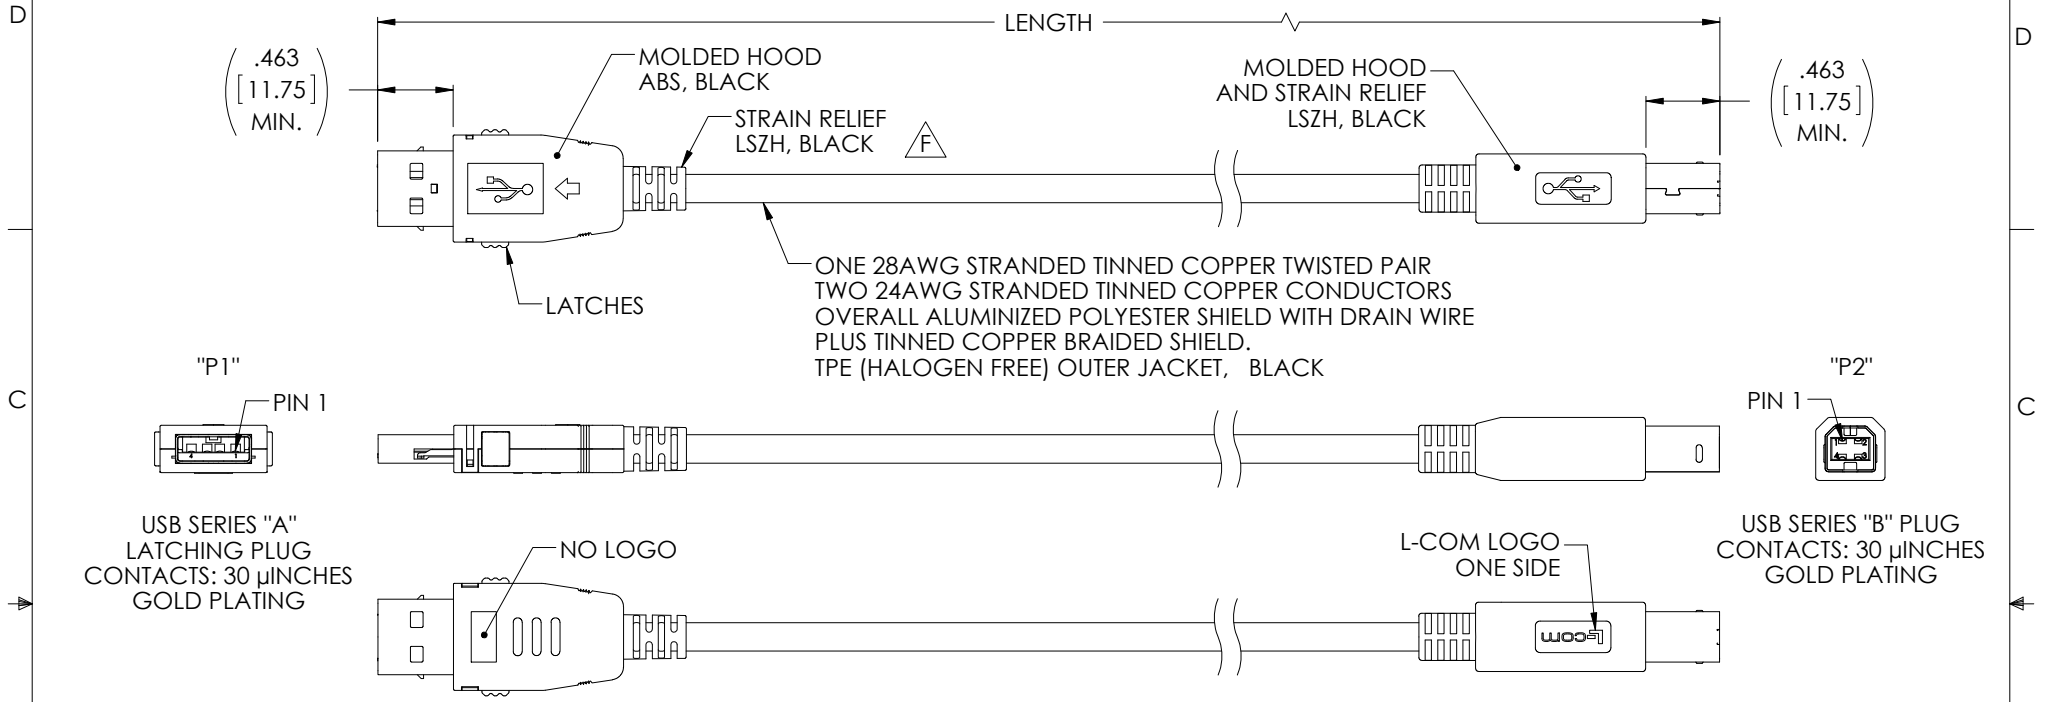

"P1"
PIN 1
USB SERIES "A"
LATCHING PLUG
CONTACTS: 30 μINCHES
GOLD PLATING

"P2"
PIN 1
USB SERIES "B" PLUG
CONTACTS: 30 μINCHES
GOLD PLATING

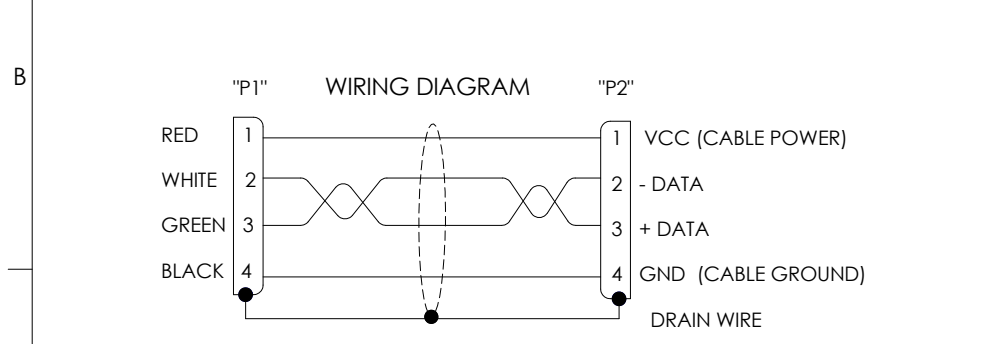

MODEL NUMBER	LENGTH METERS [FEET]
CAUZALB-03M	0.3 [.98]
CAUZALB-05M	0.5 [1.64]
CAUZALB-075M	0.75 [2.46]
CAUZALB-1M	1.0 [3.28]
CAUZALB-2M	2.0 [6.56]
CAUZALB-3M	3.0 [9.84]
CAUZALB-4M	4.0 [13.12]
CAUZALB-5M	5.0 [16.40]

NOTES:

1. CABLE ASSEMBLY SHALL HAVE 360° SHIELD TERMINATION.
2. CABLE ASSEMBLY SHALL MEET USB 2.0 REQUIREMENTS.
3. CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
4. CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

REGULATORY COMPLIANCE:
CE2011/65/EU (RoHS DIRECTIVE)

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0%	APPROVALS D.FRISIELLO	DATE 10/23/09	<p>45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845</p>				
	CHECKED BY M.MARTINEZ	10/23/09		CATEGORY USB			
ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5.08] .XX = ± .02 [1.51] .XXX = ± .005 [1.3]	APPROVED BY S.SMITH	10/23/09	PRODUCT DESCRIPTION CA,USB A LATCH/STD B LSZH				
PROJECTION 	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	COLOR VARIATIONS MAY OCCUR	<table border="1"> <tr> <td>SIZE A</td> <td>FSCM NO. 43321</td> <td>DWG. NO. CAUZALB</td> <td>REV. F</td> </tr> </table>	SIZE A	FSCM NO. 43321	DWG. NO. CAUZALB	REV. F
SIZE A	FSCM NO. 43321	DWG. NO. CAUZALB	REV. F				
SCALE: NONE		CAD FILE: CAUZALB.SLDDRW	SHEET 1 OF 1				