

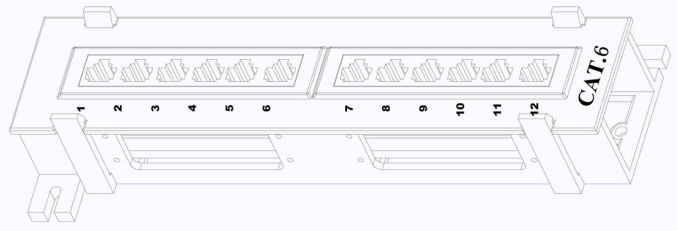
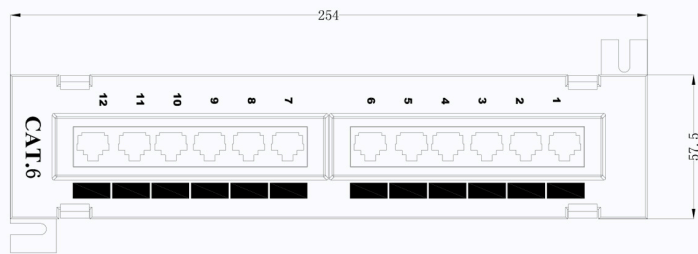
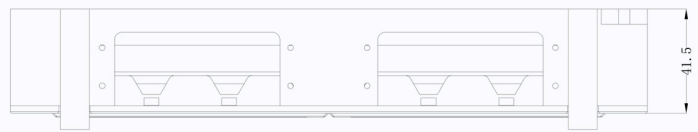


DATE	REV	DESCRIPTION	DRAFTING	CHECKED
	A/0	NEW		

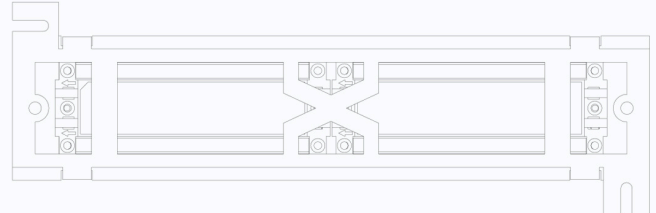

PIN/PAIR ASSIGNMENTS

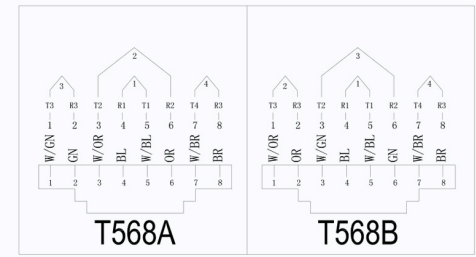

Specifications:

- RJ45 Jack---Body: PC UL94V-0 rated. Black color.
Contact: Phosphor Bronze, 50u" gold plated over Nickel plated in contact area Tin-lead over nickle in solder area.
- Connector: 110 Connector---Body: PC UL94V-0, White color.
Contact: Phosphor Bronze with Tin plated.
- P. C. Board: FR4, 1.6mm Double side.
- Operation Temperature : -10°C to 60°C.
- Insertion Force: 900gms for 8 contacts.
- Retention Strength : 7.7 kgs between jack and plug.
- Durability : 750 Cycles contact resistance test check every 100 Cycles. Insertion cycles at 20 cycles/minute max.

Unless specified on the drawing, tolerances are per the follows:

X.	±1.00	X°	±5
.X	±0.50	.X°	±1
.XX	±0.30		

Show Me CABLES

DRAW. NO		ITEM	Cat.6 180° Unshielded Mini Vertical 6/12Port panel, 110 type , BK01 C00111		
DEPARTMENT	WRD71	DRAW	Lumiere Zhu	DATE	2012/02/13
SCALE	1:1	APPROVED		DATE	
UNIT	mm	SHEET	1 OF 1		

Material	See the drawing detail	Part Number	15-185-012	Note	3RD	
----------	------------------------	-------------	------------	------	-----	--