

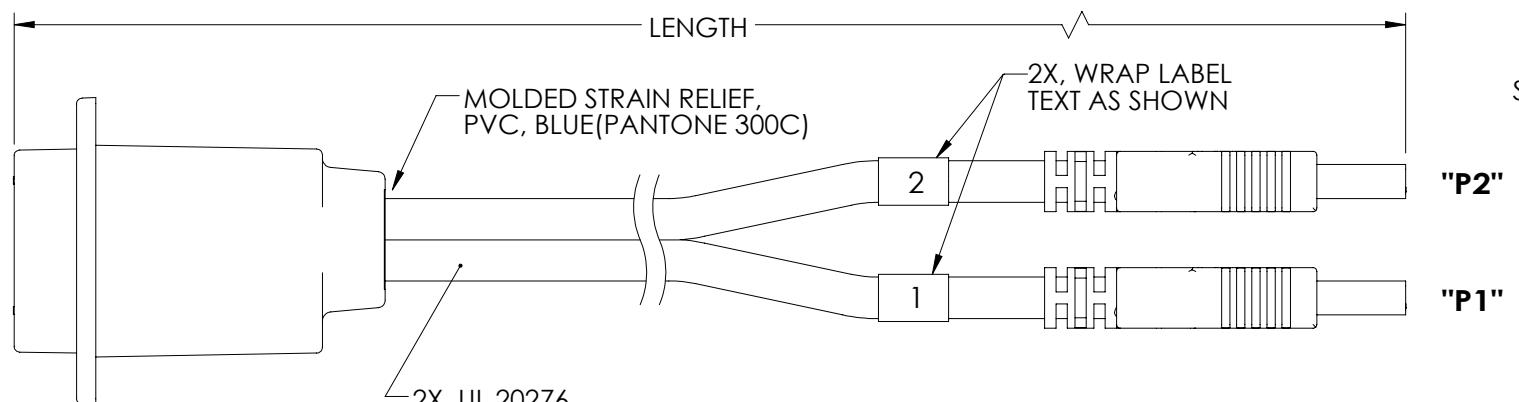
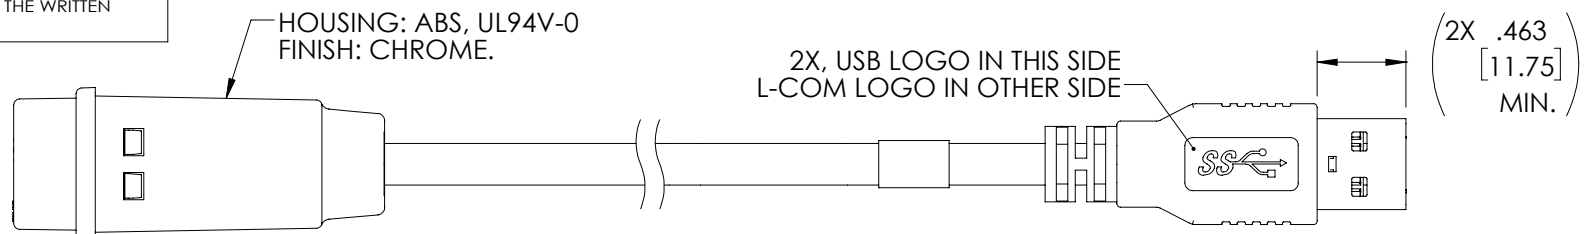


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTIONS IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.







REVISIONS			
REV	DESCRIPTION	DATE	CHANGED BY
A	INITIAL RELEASE	08/22/2023	GUITADAURO

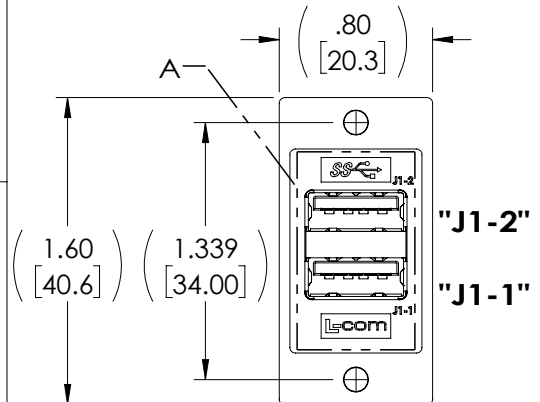

2X, UL 20276,  
(2) SHIELDED TWISTED PAIRS, 30AWG WITH ALUMINUM MYLAR SHIELD STRANDED TINNED COPPER AND DRAIN WIRE,  
(1) UNSHIELDED TWISTED PAIR, 30AWG, STRANDED TINNED COPPER,  
(2) CONDUCTORS, 24AWG, STRANDED TINNED COPPER, WITH ALUM/POLY FOIL SHIELD AND OVERALL BRIAID SHIELD  
JACKET: PVC, BLUE (PANTONE 300C)  
(NOM DIA. .217" [5.5])

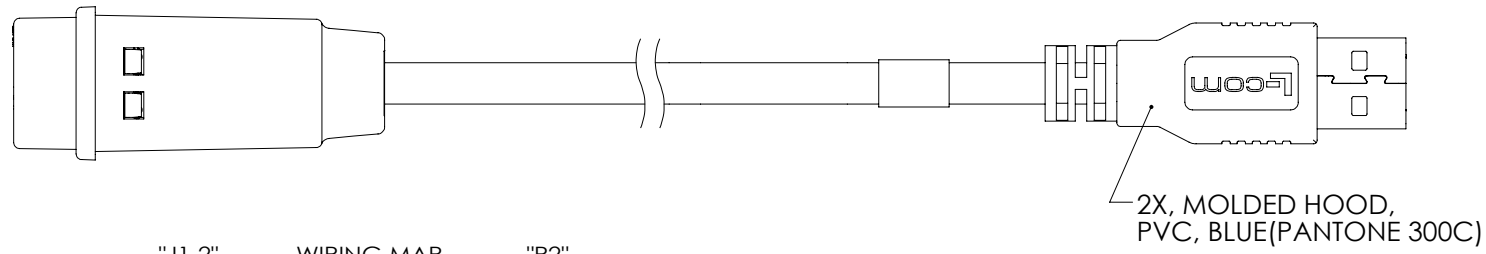

USB 3.0 A JACK  
DOUBLE STACK  
BULKHEAD ADAPTER  
SHIELDED  
CONTACTS: 30 μINCHES  
GOLD PLATING

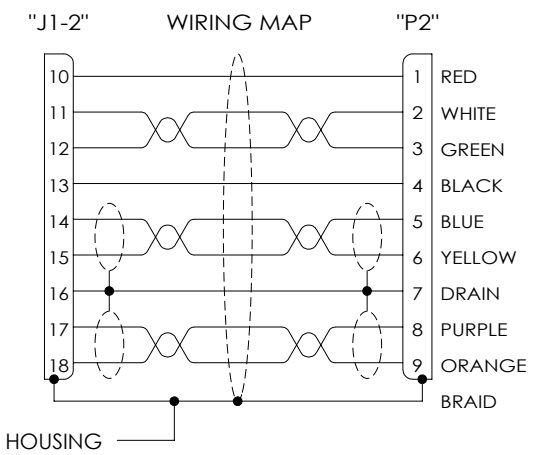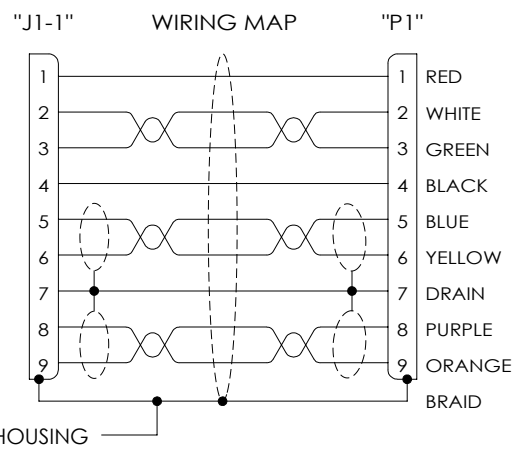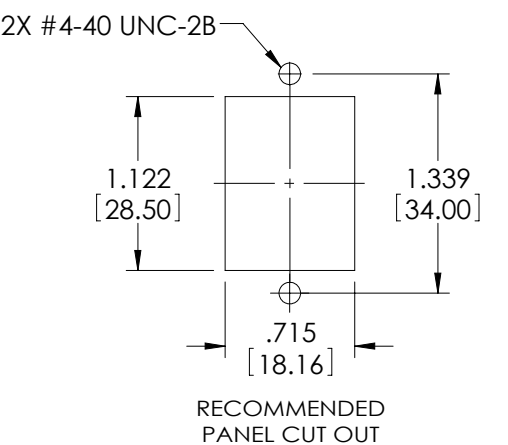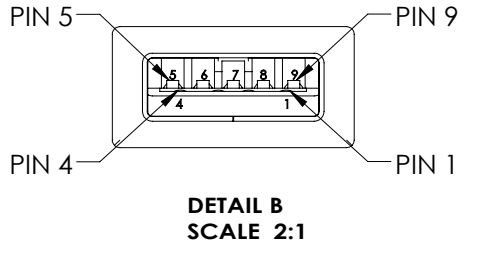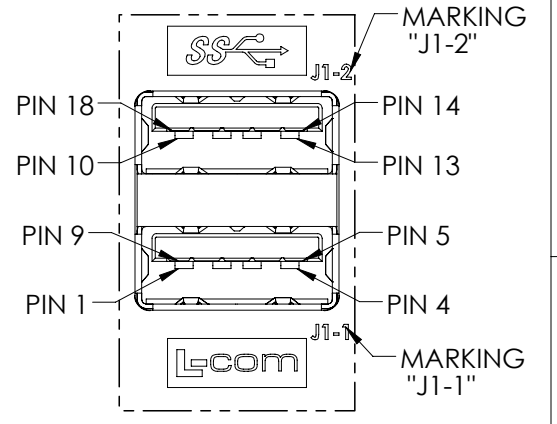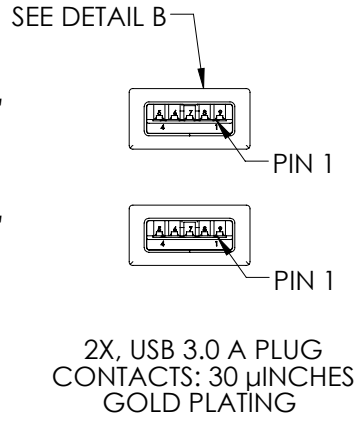

PART NUMBER	LENGTH	
	METERS	FEET
ECF504-3DSAA-03M	0.3	0.98
ECF504-3DSAA-05M	0.5	1.64
ECF504-3DSAA-075M	0.75	2.46
ECF504-3DSAA-1M	1.0	3.28
ECF504-3DSAA-105M	1.5	4.92

- NOTES:**
- RATING:  
CURRENT: 1.8A  
OPERATING TEMPERATURE: -10°C TO +70°C.
  - CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
  - CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

<p>UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm]</p> <p>OVERALL CABLE LENGTH TOLERANCE:          ≤12 [305] = +1 [25] / -0          &gt;12 [305] ≤60 [1524] = +2 [51] / -0          &gt;60 [1524] ≤120 [3048] = +4 [102] / -0          &gt;120 [3048] ≤300 [7620] = +6 [152] / -0          &gt;300 [7620] = +5% / -0</p> <p>ALL OTHER DIMENSIONAL TOLERANCES:          .X = ± .2 [5]   FRACTIONS ± 1/32          .XX = ± .02 [0.5]   ANGLES ± 1°          .XXX = ± .005 [0.13]</p>	<p>APPROVALS</p> <p>DRAWN BY S.LI</p> <p>CHECKED BY GUITADAURO</p> <p>APPROVED BY GUITADAURO</p>	<p>DATE</p> <p>02/11/2022</p> <p>02/11/2022</p> <p>02/11/2022</p>	<p><b>L-com</b> an INFINITO brand</p> <p>50 High Street, West Mill, North Andover, MA 01845 USA. Phone: 1.800.341.5266 1.978.682.6936</p>	
	<p>CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY</p>			<p>CATEGORY</p> <p>USB</p>
	<p>THIRD-ANGLE PROJECTION</p>			<p>PRODUCT DESCRIPTION</p> <p>CA, USB3.0 DOUBLE STACK A-F PNL MNT/A-M, SHLD</p>
	<p>COLOR VARIATIONS MAY OCCUR</p>	<p>SIZE</p> <p><b>B</b></p>		<p>CAGE CODE</p> <p><b>43321</b></p>

SCALE: NONE CAD FILE: ECF504-3DSAA.SLDDRW SHEET 1 OF 1