
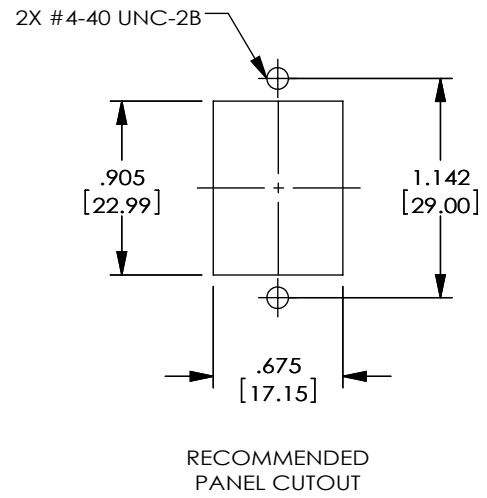
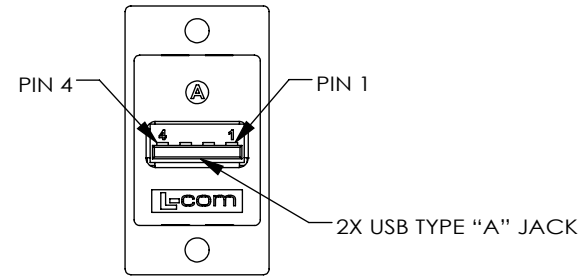
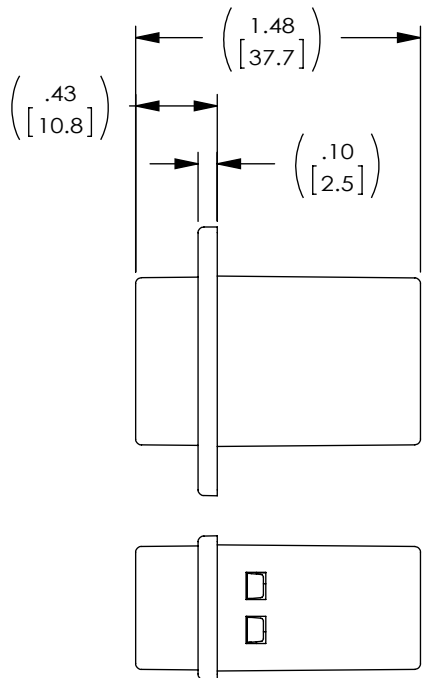


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	2/2/12	D.GRIFFIN
B	ECN 6458: USE NEW LOGO, REVISE DIM TO .43	10/12/12	D.FRISIELLO
C	ECN 6692: ADDED BOTTOM VIEW FOR CLARITY	2/20/13	D.FRISIELLO
D	ECN 8409: UPDATE TEMPERATURE RATING TO -10-70°C	7/15/16	S.LI

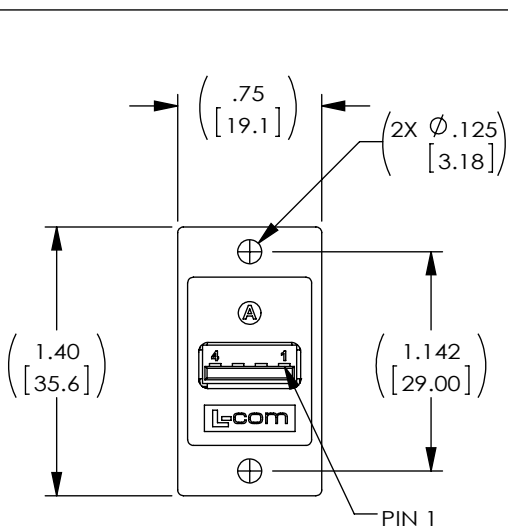

NOTES:

MATERIAL:
 COUPLER HOUSING: ABS, UL94V-0.
 CONNECTOR PLASTIC: PBT WITH GLASS FIBER
 CONNECTOR CONTACTS: BRASS
 CONNECTOR SHELL: BRASS
 PCB: EPOXY GLASS FP-4, 94V-0 FLAMMABILITY RATING

FINISH:
 COUPLER HOUSING: IVORY
 CONNECTOR CONTACTS: GOLD, 30μ INCHES.
 CONNECTOR SHELL: NICKEL

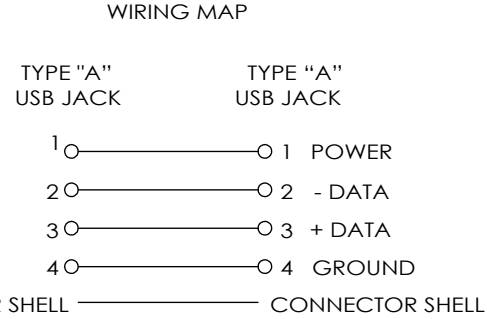

ELECTRICAL:
 CURRENT RATING: 2 AMP MAX.
 VOLTAGE RATING: 140 VDC.

ENVIRONMENTAL:
 OPERATING TEMPERATURE: -10°C TO +70°C

MISCELLANEOUS:
 COUPLER SHALL BE TESTED FOR CONTINUITY.
 COUPLER SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

REGULATORY COMPLIANCE:
 CE2011/65/EU (RoHS DIRECTIVE)

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +3% / -0%	APPROVALS	DATE	50 HIGH STREET NORTH ANDOVER, MA 01845	
	DRAWN BY D.FRISIELLO	1/10/12		CATEGORY USB
	CHECKED BY F.MAO	1/10/12		PRODUCT DESCRIPTION CPLR PNL MNT USB A/A IVORY
	APPROVED BY S.SMITH	1/10/12		SIZE A FSCM NO. 43321 DWG. NO. ECF504-UAA REV. D SCALE: NONE CAD FILE: ECF504-UAA.SLDDRW SHEET 1 OF 1
ALL OTHER DIMENSIONAL TOLERANCES: .X = ±.2 [5.08] .XX = ±.02 [51] .XXX = ±.005 [13]	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY			
PROJECTION	COLOR VARIATIONS MAY OCCUR			