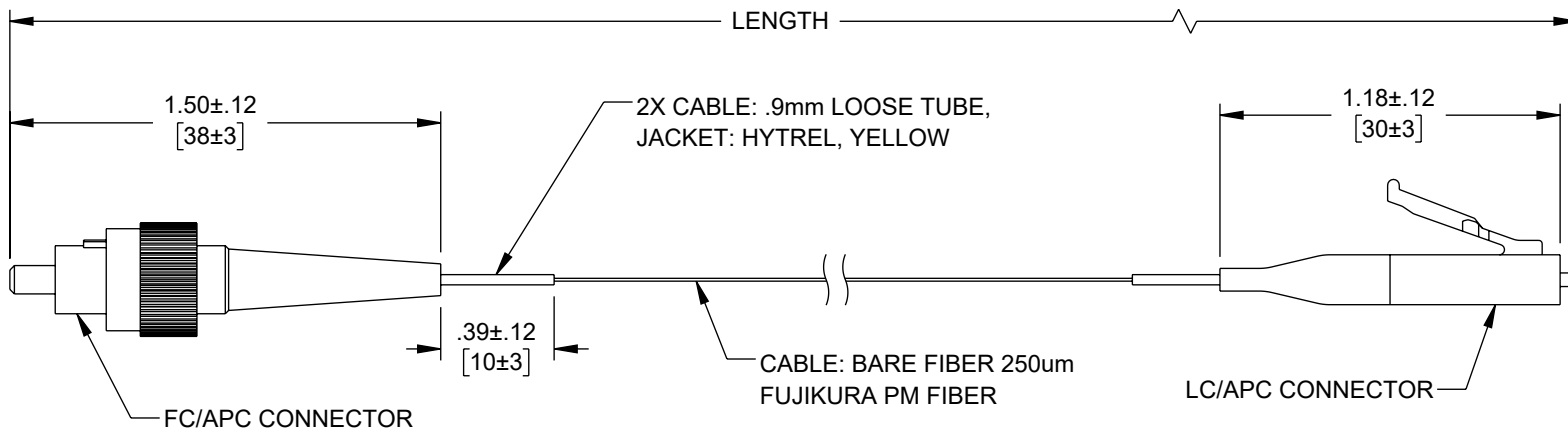


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

| REVISION | | | | | |
|----------|-----|-----------------|------------|------------|-----------|
| ZONE | REV | DESCRIPTION | DATE | CHANGED BY | APPROVED |
| | A | INITIAL RELEASE | 05/22/2023 | DMAY | PHOSPODAR |



PERFORMANCE SPECIFICATIONS:

WAVELENGTH: 1550 nm.
 INSERTION LOSS: ≤0.9 dB.

RETURN LOSS (APC): ≥40 dB.
 EXTINCTION RATIO AT 23°C: 23 dB MIN (25 dB TYP).
 KEY ORIENTATION: SLOW AXIS.

AXIS ALIGNMENT: ±3°. PM FIBER, CONNECTOR KEY ARE ALIGNED WITH SLOW AXIS (FAST AXIS IS NOT CUT OFF).

OPERATING TEMPERATURE: -20°C TO +70°C.
 STORAGE TEMPERATURE: -40°C TO +80°C.

FIBER TYPE: PM1550.
 ALL CONNECTORS ACCOMPANIED WITH A DUST CAP INSTALLED (NOT SHOWN).
 CABLE ASSEMBLIES TO BE TESTED FOR CONTINUITY.
 CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

REGULATORY COMPLIANCE:
 EU RoHS DIRECTIVE (MOST RECENT RELEASED VERSION)

| ITEM NUMBER | LENGTH | |
|---------------------|--------|------|
| | METERS | FEET |
| FCA-PM15FCALCA-0-01 | 1.0 | 3.28 |






DIAGRAM OF END FACE

| | | | | | |
|--|--|--|---|------------------------------|-----------|
| UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0 ALL OTHER DIMENSIONAL TOLERANCES: .X = ±.2 [5] FRACTIONS ± 1/32 .XX = ±.02 [5] ANGLES ±1° .XXX = ±.005 [13] | APPROVALS | DATE |  50 High Street, West Mill, North Andover, MA 01845 USA. Phone: 1.800.341.5266 1.978.682.6936 | | |
| | DRAWN BY DMAY | 05/19/2023 | | | |
| | CHECKED BY HBAKKE | 05/22/2023 | | | |
| | APPROVED BY PHOSPODAR | 05/22/2023 | | | |
| THIRD-ANGLE PROJECTION | CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY | PRODUCT DESCRIPTION FIBER OPTIC PATCH CABLE, SIMPLEX POLARIZED MAINTAINING (PM), FC APC TO LC APC, 1550nm, .25mm BARE FIBER | CATEGORY FIBER OPTIC | | |
|  | COLOR VARIATIONS MAY OCCUR | SIZE A | CAGE CODE 43321 | ITEM NO. FCA-PM15FCALCA-0 | REV. A |
| SCALE: NONE | | CAD FILE: FCA-PM15FCALCA-0.SLDDRW | | SHEET 1 OF 1 | |