




THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
E	ECN 10XXX: ADDED VALUES -01D, -02D, -03D, -07D, -12D, -18D	11/04/2020	PHOSPODAR

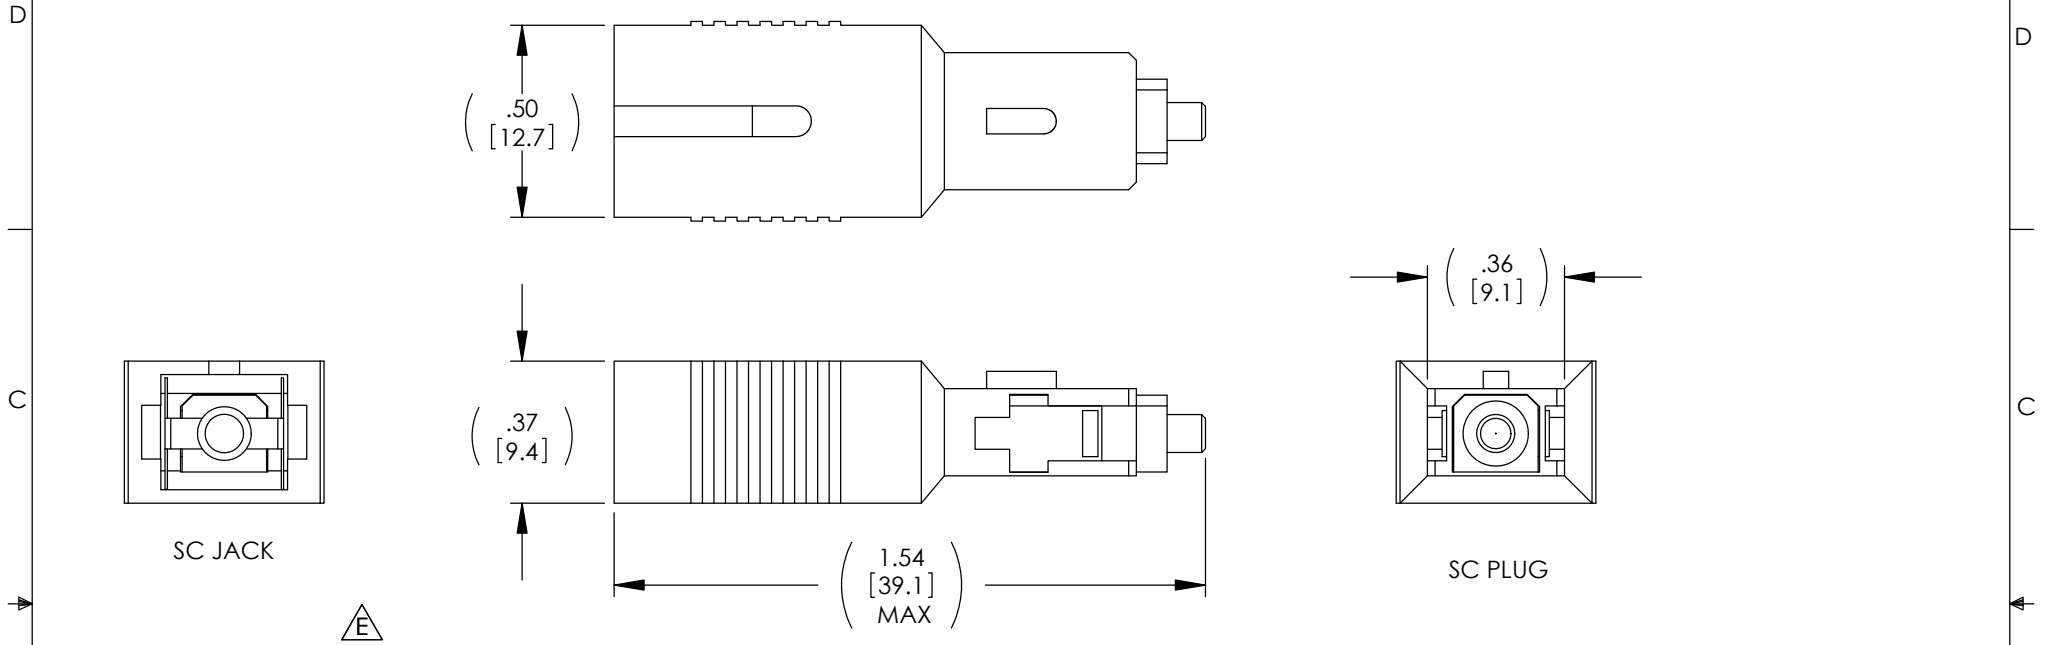

MODEL	ATTENUATION	BACK REFLECTION
FOATSCU-01D	1dB	≤ -55 dB
FOATSCU-02D	2dB	≤ -55 dB
FOATSCU-03D	3dB	≤ -55 dB
FOATSCU-05D	5dB	≤ -55 dB
FOATSCU-07D	7dB	≤ -55 dB
FOATSCU-10D	10dB	≤ -55 dB
FOATSCU-012D	12dB	≤ -55 dB
FOATSCU-15D	15dB	≤ -55 dB
FOATSCU-18D	18dB	≤ -55 dB
FOATSCU-20D	20dB	≤ -55 dB
FOATSCU-25D	25dB	≤ -55 dB

- NOTES:**
- ATTENUATOR UTILIZES "UPC" POLISH.
 - OPERATING TEMPERATURE RANGE: -40°C TO $+75^{\circ}\text{C}$.
 - SINGLE MODE WAVELENGTH RANGE: 1310-1550 nm.
 - ATTENUATOR IS PACKAGED TWO WITH DUST CAPS INSTALLED (NOT SHOWN).
 - ATTENUATOR SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤ 12 [305] = +1 [25] / -0 > 12 [305] ≤ 60 [1524] = +2 [51] / -0 > 60 [1524] ≤ 120 [3048] = +4 [102] / -0 > 120 [3048] ≤ 300 [7620] = +6 [152] / -0 > 300 [7620] = +5% / -0 ALL OTHER DIMENSIONAL TOLERANCES: .X = $\pm .2$ [5] FRACTIONS $\pm 1/32$.XX = $\pm .02$ [.5] ANGLES $\pm 1^{\circ}$.XXX = $\pm .005$ [.13]	APPROVALS DRAWN BY DFRISIELLO CHECKED BY D.CASTRO APPROVED BY P.MC NEIL	DATE 10/29/2007 10/29/2007 10/29/2007	 an INFINIT [®] brand	50 High Street, West Mill, North Andover, MA 01845 USA. Phone: 1.800.341.5266 1.978.682.6936
	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY COLOR VARIATIONS MAY OCCUR	CATEGORY FIBER OPTICS	PRODUCT DESCRIPTION FIBER SCU ATTENUATOR	SIZE A CAGE CODE 43321 ITEM NO. FOATSCU
THIRD-ANGLE PROJECTION 	SCALE: NONE CAD FILE: FOATSCU.SLDDRW		SHEET 1 OF 1	