


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SHOW ME CABLES, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF SHOW ME CABLES, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	8/30/2022	DGUTTADAURO

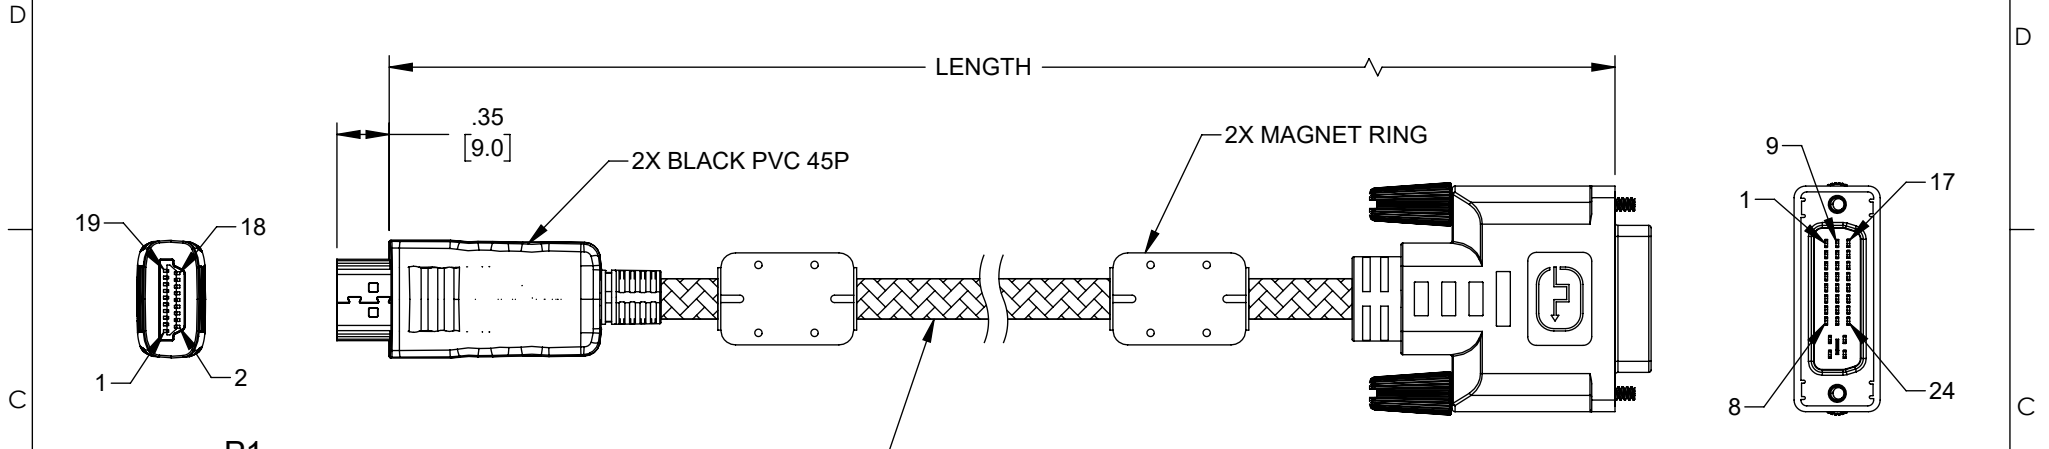

P1
HDMI AM 19P
PIN/SHELL: GOLD PLATED

P2
DVI24+1 AM
PIN/SHELL: GOLD PLATED

(1/0.23BC*1P+D1/0.23BC+AL-FOIL+MY)*5P+1/0.23BC*4C+
AL-FOIL+D1/0.23BC+B64/0.12AM
JACKET: BLACK PVC OD: 6.0
+BLACK THREE WIRE NYLON NET OD: 6.8±0.15mm



PIN ASSIGNMENT

HDMI AM	DVI M
1	2
2	3
3	1
4	10
5	11
6	9
7	18
8	19
9	17
10	23
11	22
12	24
15	6
16	7
18	14
17	15
19	16
Shell	Shell

PART NUMBER	LENGTH	
	FEET	METERS
HD20DVI-MM-F-05M	1.64	0.5±.02
HD20DVI-MM-F-1M	3.28	1.0±.03
HD20DVI-MM-F-2M	6.56	2.0±.03
HD20DVI-MM-F-3M	9.84	3.0±.03

NOTES:
1. CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
2. CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

REGULATORY COMPLIANCE:
EU RoHS DIRECTIVE (MOST RECENT RELEASED VERSION)

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm]	APPROVALS	DATE	 115 Chesterfield Industrial Blvd., Chesterfield, MO 63005 Phone: 1.888.519.9505 Fax: 1.888.519.9515
	OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0	DRAWN BY DMAY	
ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5] FRACTIONS ± 1/32 .XX = ± .02 [5] ANGLES ± 1° .XXX = ± .005 [1.3]	CHECKED BY HBAKKE	8/30/2022	CATEGORY AUDIO/VIDEO
	APPROVED BY DGUTTADAURO	8/30/2022	PRODUCT DESCRIPTION HDMI TO DVI MALE TO MALE WITH FERRITES, 1080P, NYLON BRAIDED CABLE
THIRD-ANGLE PROJECTION 	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	COLOR VARIATIONS MAY OCCUR	SIZE: A CAGE CODE: 3SVT8 ITEM NO.: HD20DVI-MM-F SCALE: NONE CAD FILE: HD20DVI-MM-F.SLDDRW SHEET 1 OF 1