

Hyper-Tek Hyper Plus 5e CMP Bulk Cable

Hyper-Tek Hyper Plus 5e Standard Category 5e UTP Cables are designed for horizontal network and voice applications in a structured cabling network to connect between the user outlet and horizontal cross-connect.

Description

Construction

24 AWG bare copper wire insulated with thermoplastic. Two insulated conductors twisted together to form a pair and four such pairs cabled to form the basic unit, jacketed with flame-retardant PVC.

Standards

- North American: ANSI/TIA/EIA-568-B.2 Category 5e, UL 444 and C22.2 No.214-02
- International: ISO/IEC 11801 2nd Edition Category 5. EU Directive 2002/95/EC (RoHS)

Flame Rating

- Plenum - NFPA 262, CMP
- UL Listed


Applications

Berk-Tek's Hyper Plus 5e Standard Category 5e UTP cable is intended for high speed data applications up to 100 MHz including:

IEEE 802.3	1000BASE-T	1 GB/s
ATM	155 Mb/s	155 Mb/s
IEEE 802.3	100BASE-TX	100 MB/s
CDDI	n/a	100 Mb/s
IEEE 802.3	10BASE-T	10 Mb/s

Features

- Supports most data and voice applications
- ETL Verified to TIA/EIA-568-B.2 Category 5e

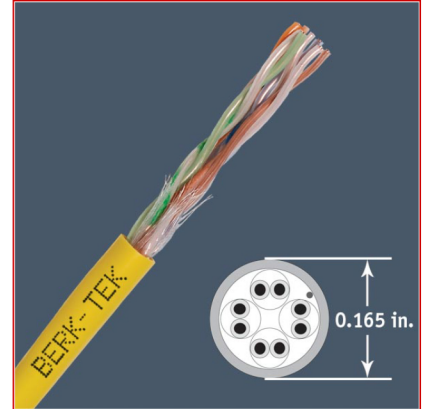

Standards
National TIA/EIA-568-B.2

Hyper-Tek Hyper Plus 5e CMP Bulk Cable

Benefits

- Universally accepted design for global commercial network installations
- Simplified structured cabling solution preserving long-term network investment
- Characterized to 350 Mhz, 250 Mhz greater than the standard

Hyper-Tek Hyper Plus 5e CMP Bulk Cable

Characteristics

Dimensional characteristics	
Length per reel	1000.0 ft
Number of pairs	4
Usage characteristics	
Category	Cat. 5e
Fire safety	Plenum Rated

Technical Data - Physical

Technical Data - Physical			Color Code		
	24 AWG Bare Copper		Pair-1	White/Blue	Blue
Conductor			Pair-2	White/Orange	Orange
Conductor diameter-in. (mm)	0.02	(0.52)	Pair-3	White/Green	Green
Insulated Conductor Diameter- in. (mm)	0.035	(0.89)	Pair-4	White/Brown	Brown
Cable diameter-in. (mm)	0.165	(4.2)	Temperature Rating		
Nominal cable weight-lb./kft. (kg/km)	20	(30)			
Max. installation tension-lb. (N)	25	(110)	Installation	0°C to +50°C	
Min. bend radius-in. (mm)	1	(25.4)	Operation	-20°C to +60°C	

Technical Data - Parametric Measurements

Mutual Capacitance	5.6 nF/100 m max.
DC resistance	9.38 Ohms/100 m max.
Skew	45 ns/100 m max.
Pair to ground Unbalance	330 pF/100 m max.
Velocity of Propagation	72% nom.
Input Impedance	100 ± 15% 1-100 MHz
DC Resistance Unbalance:	5% max.

Hyper-Tek Hyper Plus 5e CMP Bulk Cable

Technical Data - Electrical Characteristics

FREQ MHz	SRL (dB)		RL (dB)		INSERTION LOSS (dB/100m)		PS-NEXT (dB)		NEXT (dB)	
	min.	typical	min.	typical	max.	typical	min.	typical	min.	typical
1	25.0	36.9	20.0	39.0	2.0	1.7	62.3	77.0	66.3	84.0
4	25.0	42.2	23.0	37.6	4.1	3.5	53.3	68.3	57.3	84.5
10	25.0	39.1	25.0	38.0	6.5	5.6	47.3	65.0	51.3	72.4
16	25.0	38.6	25.0	37.0	8.2	7.2	44.3	58.6	48.3	77.5
20	24.3	47.0	25.0	46.4	9.3	8.1	42.8	57.3	46.8	71.8
31.25	23.6	34.6	23.6	34.5	11.7	10.1	39.9	53.5	43.9	67.9
62.5	21.5	33.7	21.5	33.0	17.0	14.6	35.4	53.2	39.4	63.6
100	20.1	36.4	20.1	37.3	22.0	18.7	32.3	45.8	36.3	57.5
250	17.3	31.6	17.3	30.9	36.9	30.7	26.3	45.1	30.3	54.8
350	16.3	34.2	16.3	33.2	44.9	36.9	24.2	36.7	28.2	49.3

Technical Data - Electrical Characteristics

FREQ Mhz	ACR (dB@100m)		PS-ACR (dB@100m)		ELFEXT (dB)		PS-ELFEXT (dB)	
	min.	typical	min.	typical	min.	typical	min.	typical
1	64.3	77.5	60.3	75.1	63.8	88.8	60.8	79.4
4	53.2	66.6	49.2	64.4	51.7	78.9	48.7	68.7
10	44.8	60.9	40.8	58.7	43.8	68.0	40.8	60.0
16	40	52.8	36.0	50.6	39.7	60.5	36.7	50.9
20	37.5	49.6	33.5	48.3	37.7	58.2	34.7	54.6
31.25	32.2	44.0	28.2	42.3	33.9	53.9	30.9	47.1
62.5	22.4	38.9	18.4	37.0	27.8	47.7	24.8	42.4
100	14.3	27.6	10.3	25.1	23.8	43.3	20.8	38.1
250	—	12.5	—	11.2	15.8	33.6	12.8	24.8
350	—	-2.3	—	-4	12.9	28.0	9.9	19.5

Frequencies above 250 MHz are for engineering information.

Product List

☞ = Make to order, ☛ = Make to stock

Part Number	Description	Type of cable	Colour	Packaging	Field of application
☛ 10032223	HyperPlus 5e Plenum	UTP	White	Box	Indoor
☛ 10032221	HyperPlus 5e Plenum	UTP	White	Reel in a box	Indoor
☛ 10032222	HyperPlus 5e Plenum	UTP	White	Reel	Indoor
☛ 10033521	HyperPlus 5e Plenum	UTP	Black	Box	Indoor
☛ 10033807	HyperPlus 5e Plenum	UTP	Black	Reel	Indoor
☛ 10032229	HyperPlus 5e Plenum	UTP	Red	Box	Indoor
☛ 10032228	HyperPlus 5e Plenum	UTP	Red	Reel	Indoor
☛ 10060673	HyperPlus 5e Plenum	UTP	Red	Reel in a box	Indoor

☞ = Make to order, ☛ = Make to stock

Hyper-Tek Hyper Plus 5e CMP Bulk Cable

Part Number	Description	Type of cable	Colour	Packaging	Field of application
📦 10032232	HyperPlus 5e Plenum	UTP	Green	Box	Indoor
📦 10032231	HyperPlus 5e Plenum	UTP	Green	Reel	Indoor
📦 10032230	HyperPlus 5e Plenum	UTP	Green	Reel in a box	Indoor
📦 10033814	HyperPlus 5e Plenum	UTP	Pink	Box	Indoor
📦 10034145	HyperPlus 5e Plenum	UTP	Pink	Reel	Indoor
📦 10032224	HyperPlus 5e Plenum	UTP	Pink	Reel in a box	Indoor
📦 10063926	HyperPlus 5e Plenum	UTP	Brown	Box	Indoor
📦 10032235	HyperPlus 5e Plenum	UTP	Yellow	Box	Indoor
📦 10032234	HyperPlus 5e Plenum	UTP	Yellow	Reel	Indoor
📦 10032233	HyperPlus 5e Plenum	UTP	Yellow	Reel in a box	Indoor
📦 10032227	HyperPlus 5e Plenum	UTP	Blue	Box	Indoor
📦 10032226	HyperPlus 5e Plenum	UTP	Blue	Reel	Indoor
📦 10032225	HyperPlus 5e Plenum	UTP	Blue	Reel in a box	Indoor
📦 10034885	HyperPlus 5e Plenum	UTP	Violet	Box	Indoor
📦 10035124	HyperPlus 5e Plenum	UTP	Violet	Reel	Indoor
📦 10032236	HyperPlus 5e Plenum	UTP	Orange	Box	Indoor
📦 10033516	HyperPlus 5e Plenum	UTP	Orange	Reel	Indoor
📦 10035018	HyperPlus 5e Plenum	UTP	Orange	Reel in a box	Indoor
📦 10032206	HyperPlus 5e Plenum	UTP	Grey	Reel	Indoor
📦 10032207	HyperPlus 5e Plenum	UTP	Grey	Box	Indoor
📦 10032205	HyperPlus 5e Plenum	UTP	Grey	Reel in a box	Indoor

☎ = Make to order, 📦 = Make to stock