
24-Port CAT 5e High Density Feed-Thru Patch Panel

PRODUCT SPECIFICATION

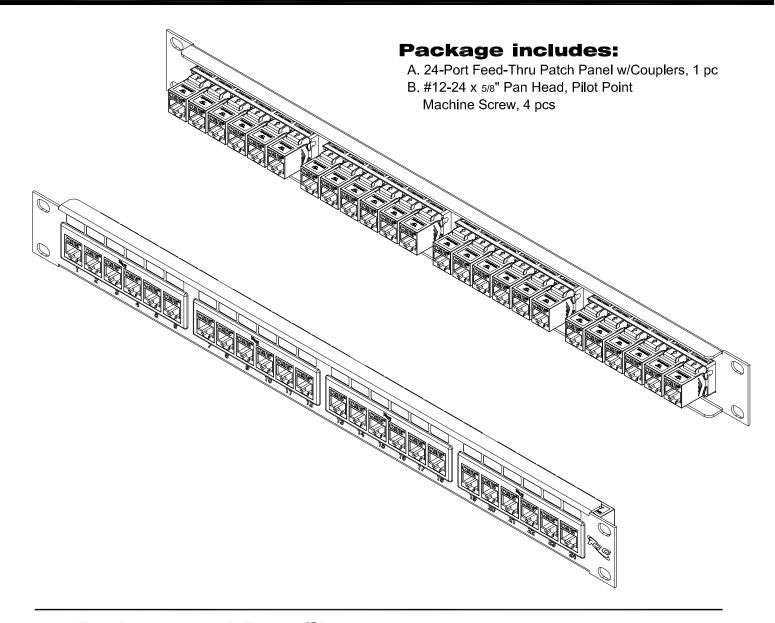


Features and Benefits:


- Rack mounted reinforced steel panel with pre-numbered ports
- Flush mount design adds stability by allowing a rigid fit and a neat finished appearance
- Designed to support the distribution of voice, data, and audio needs for commercial or residential applications
- Plug and play solution for easy installation
- Designed to fit all standard 19" racks and cabinets
- 1 rack mount space (RMS)

PATCH PAI	NEL, CAT 5e, FEED-TH	IRU 24-P,1RMS
ITEM NO.	ICMPP24CP5	REV. A
DWG NO.	PSMPP24CP5	PAGE NO. 1



CUSTOMER CARE / TECHNICAL SUPPORT * CSR@ICC.COM / 888-ASK-4-ICC (275-4422) * 14700 Alondra Blvd., La Mirada, CA 90638 * www.icc.com



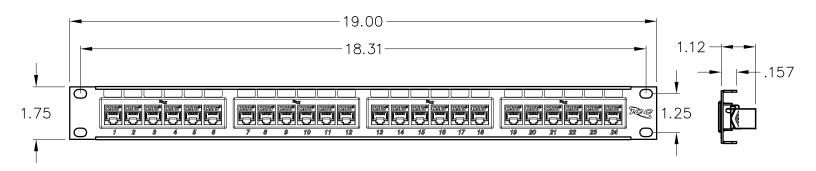

NOTE: UNLESS OTHERWISE SPECIFIED

1. BLANK PATCH PANEL: A. MATERIAL: 16 GA CRS

B. SURFACE FINISH: BLACK POWDER COAT

2 6-PORT HD BEZEL:

A. MATERIAL: ABS, UL 94V-0

3. CAT 5E COUPLER:

- ELECTRICAL:

A. CURRENT RATING: 1.5 AMPS MAX

B. VOLTAGE RATING: 150 VOLTS ALTERNATING

C. DIELECTRIC WITHSTANDING VOLTAGE: 1000 VOLTS RMS, 60 HZ

D. INSULATION RESISTANCE: > 10 MOHMS

- MECHANICAL:

A. MATING FORCE: 5 LBS MAX B. UNMATING FORCE: 5 LBS MAX

C. PLUG RETENTION IN JACK: 20 LBS MIN

D. DURABILITY: 750 CYCLES

- MATERIAL & FINISH:

A. HOUSING: ABS, UL 94V-0

B. COLOR: BLACK

C. CONTACT: PHOSPHOR BRONZE GOLD PLATING OVER 100 MICRO INCH NICKEL

D. GOLD PLATING: 1.27 MICRON/50 MICRO INCH MIN

FREQUENCY (MHz)	NEXT (dB)	RETURN LOSS (dB)	ACRF (dB)	INSERTION LOSS (dB)
10.00	47.0	17.0	37.4	7.1
25.00	40.3	16.0	29.4	11.4
62.50	33.6	12.1	27.5	18.6
100.00	30.1	10.0	17.4	24.0

PIN	PIN	
1		
2	2	
3	3	
4	4	
5	5	
6	6	
7	7	
8	8	

WIRING DIAGRAM

PATCH PANEL,	CAT 5e, FEED-TH	IRU 24-P,1RMS

ITEM NO.	ICMPP24CP5	REV. A
DWG NO.	PSMPP24CP5	PAGE NO. 2



CUSTOMER CARE / TECHNICAL SUPPORT * CSR@ICC.COM / 888-ASK-4-ICC (275-4422) * 14700 Alondra Blvd., La Mirada, CA 90638 * www.icc.com