

902 to 928 MHz, RFID Flat Panel Antenna, 12 dBi Gain RP TNC male, PVC Radome, RHCP



## LCANFP1029

### Features

- High Performance Multi-tag read/write Capabilities
- Concealable Design
- Right Hand Circular Polarized
- 902 to 928 MHz Frequency Range
- 2 Meter Cable
- RP TNC Male Connector

### Applications

- Radio Frequency Identification
- Inventory Management
- Access Control
- Data Collection
- Asset Tracking
- Livestock Management

### Description

L-Com's LCANFP1029 is a Directional RFID flat panel RHCP antenna. The LCANFP1029 with a 12 dBi gain nominal is a Directional antenna. Our 902-928 MHz RP TNC male connector, flat panel antenna has a gain of 12 dBi.

With an impedance of 50 Ohms and max input power of 20 Watts, the LCANFP1029 RFID flat panel is well suited for Radio Frequency Identification tag reading applications. Contact L-Com's antenna experts for any assistance on 902-928 MHz, 12 dBi RP TNC male connector antennas. This 12 dBi gain RFID antenna is highly directional providing the reader radio the capabilities of simultaneously reading a multitude of RFID tags with a high degree of accuracy.

L-Com's RFID LCANFP1029 has a radome made of PVC in White color and comes from a facility certified to ISO 9001:2015.

This Reverse Polarity TNC connectized Antenna has an overall length of 36 in, width of 6 in, and weighs 4.85 lbs. Use our on-line ordering system to purchase your LCANFP1029 RFID Directional RHCP antenna 24 hours a day with same-day shipping and no MOQs (minimum order quantities).

### Configuration

Design	Flat Panel
Application Band	RFID
Band Type	Single
Radiation Pattern	Directional
Polarization	RHCP
Cable Type	RG142
Connector Type	TNC Male Reverse Polarity
Lightning Protection	DC Grounded

### Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	902		928	MHz
Input VSWR			1.3:1	
Impedance		50		Ohms
Gain		12		dBi

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications:  
[902 to 928 MHz, RFID Flat Panel Antenna, 12 dBi Gain RP TNC male, PVC Radome, RHCP LCANFP1029](#)

902 to 928 MHz, RFID Flat Panel Antenna, 12 dBi  
Gain RP TNC male, PVC Radome, RHCP



## LCANFP1029

Front to Back Ratio	20		dB
Horizontal (Azimuth) HPBW		80	Degrees
Vertical (Elevation) HPBW		18	Degrees
Input Power		20	Watts

### Mechanical Specifications

Radome Material	PVC
<b>Size</b>	
Length	36 in [914.4 mm]
Width	6 in [152.4 mm]
Height	1 in [25.4 mm]
Weight	4.85 lbs [2.2 kg]

### Environmental Specifications

<b>Temperature</b>	
Operating Range	-40 to +60 deg C


**Compliance Certifications** (see [product page](#) for current document)

### Plotted and Other Data


Notes:

902 to 928 MHz, RFID Flat Panel Antenna, 12 dBi  
Gain RP TNC male, PVC Radome, RHCP

**LCANFP1029**

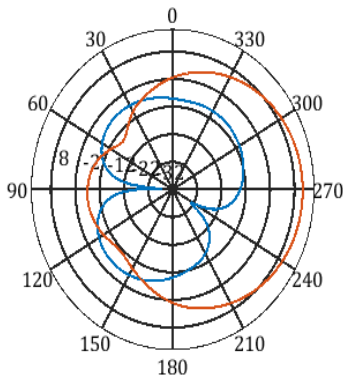


f=900MHz, X-Y Plane

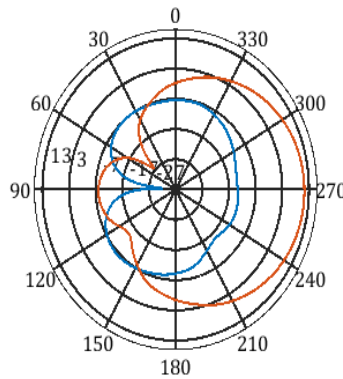


f=925MHz, X-Y Plane

2D Pattern: Co@2-cuts

2D Pattern: Co@2-cuts

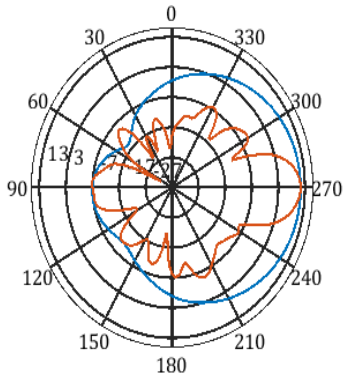

f=900MHz, Co@2-cuts

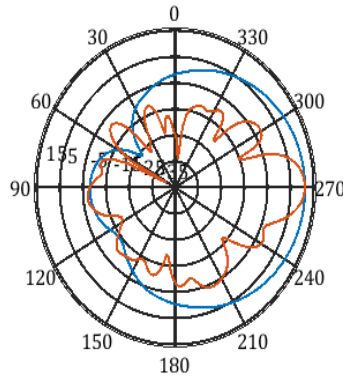

f=925MHz, Co@2-cuts

2D Pattern: @phi=90(Vertical)

n

902 to 928 MHz, RFID Flat Panel Antenna, 12 dBi Gain RP TNC male, PVC Radome, RHCP from L-com has same day shipment for

902 to 928 MHz, RFID Flat Panel Antenna, 12 dBi  
Gain RP TNC male, PVC Radome, RHCP

## LCANFP1029



domestic and International orders. Our portfolio includes coaxial cable assemblies, connectors, adapters and custom products as well as lightning and surge protectors, NEMA rated enclosures, and an RF product line which includes antennas, amplifiers, passive, and active components.

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to impliment improvements. L-com reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. L-com does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and L-com does not assume liability arising out of the use of any part or document.

L-com CAD Drawing

