

902 to 928 MHz RFID Flat Panel Antenna, RHCP,
9 dBi, White ABS, SMA Male, IP54



LCANFP1054

Features

- High Performance Multi-tag read/write Capabilities
- Concealable Design
- Right Hand Circular Polarized
- 902 to 928 MHz Frequency Range
- SMA Male Connector
- IP54 Rated

Applications

- Radio Frequency Identification
- Inventory Management
- Access Control
- Data Collection
- Asset Tracking
- Livestock Management

Description

L-Com's LCANFP1054 is a RHCP RFID flat panel antenna. The LCANFP1054 with a 9 dBi gain nominal is a Directional antenna. Our 902 to 928 MHz antenna has SMA Male connector.

With an impedance of 50 Ohms and max input power of 50 Watts, the LCANFP1054 flat panel RHCP antenna is well suited for Radio Frequency Identification tag reading applications. This 902-928 MHz 9 dBi gain RFID antenna is highly directional providing the reader radio the capabilities of simultaneously reading a multitude of RFID tags with a high degree of accuracy.

L-Com's RFID LCANFP1054 has a radome made of ABS in White color and comes from a facility certified to ISO 9001:2015. This SMA Male connectized Antenna has an overall length of 10 in, width of 10 in, and weighs 1.87 lbs. Use our on-line ordering system to purchase your LCANFP1054 RFID Directional RHCP antenna 24 hours a day with same-day shipping and no MOQs (minimum order quantities).

Configuration

Design	Flat Panel
Application Band	RFID
Band Type	Single
Radiation Pattern	Directional
Polarization	RHCP
Connector Type	SMA Male
Connector Type Specification	MIL-STD-348A
Lightning Protection	DC Grounded

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	902		928	MHz
Input VSWR			1.3:1	
Impedance		50		Ohms
Gain		9		dBi
Horizontal (Azimuth) HPBW		65		Degrees
Vertical (Elevation) HPBW		65		Degrees

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications:
[902 to 928 MHz RFID Flat Panel Antenna, RHCP, 9 dBi, White ABS, SMA Male, IP54 LCANFP1054](#)

902 to 928 MHz RFID Flat Panel Antenna, RHCP,
9 dBi, White ABS, SMA Male, IP54



LCANFP1054

Input Power	50	Watts
Axial Ratio	2	dB

Mechanical Specifications

Radome Material	ABS
Size	
Length	10 in [254 mm]
Width	10 in [254 mm]
Height	1.3 in [33.02 mm]
Weight	1.87 lbs [848.22 g]

Connectors

Description	Connector 1	Connector 2	Connector 3
A	B	C	D
Inner Conductor Material and Plating	Brass, Gold		
Inner Conductor Plating Specification	50 µin minimum		
Coupling Nut Material and Plating	Brass, Nickel		
Coupling Nut Plating Specification	100 µin minimum		
Hex Size	5/16 inch		
Body Material and Plating	Brass, Nickel		
Body Plating Specification	100 µin minimum		

Environmental Specifications

Temperature	
Operating Range	-40 to +55 deg C
Ingress Protection	IP54

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

902 to 928 MHz RFID Flat Panel Antenna, RHCP, 9 dBi, White ABS, SMA Male, IP54 from L-com has same day shipment for domestic and International orders. Our portfolio includes coaxial cable assemblies, connectors, adapters and custom products as well as lightning and surge protectors, NEMA rated enclosures, and an RF product line which includes antennas, amplifiers, passive, and active

902 to 928 MHz RFID Flat Panel Antenna, RHCP,
9 dBi, White ABS, SMA Male, IP54




LCANFP1054

components.

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to implement improvements. L-com reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. L-com does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and L-com does not assume liability arising out of the use of any part or document.

L-com CAD Drawing

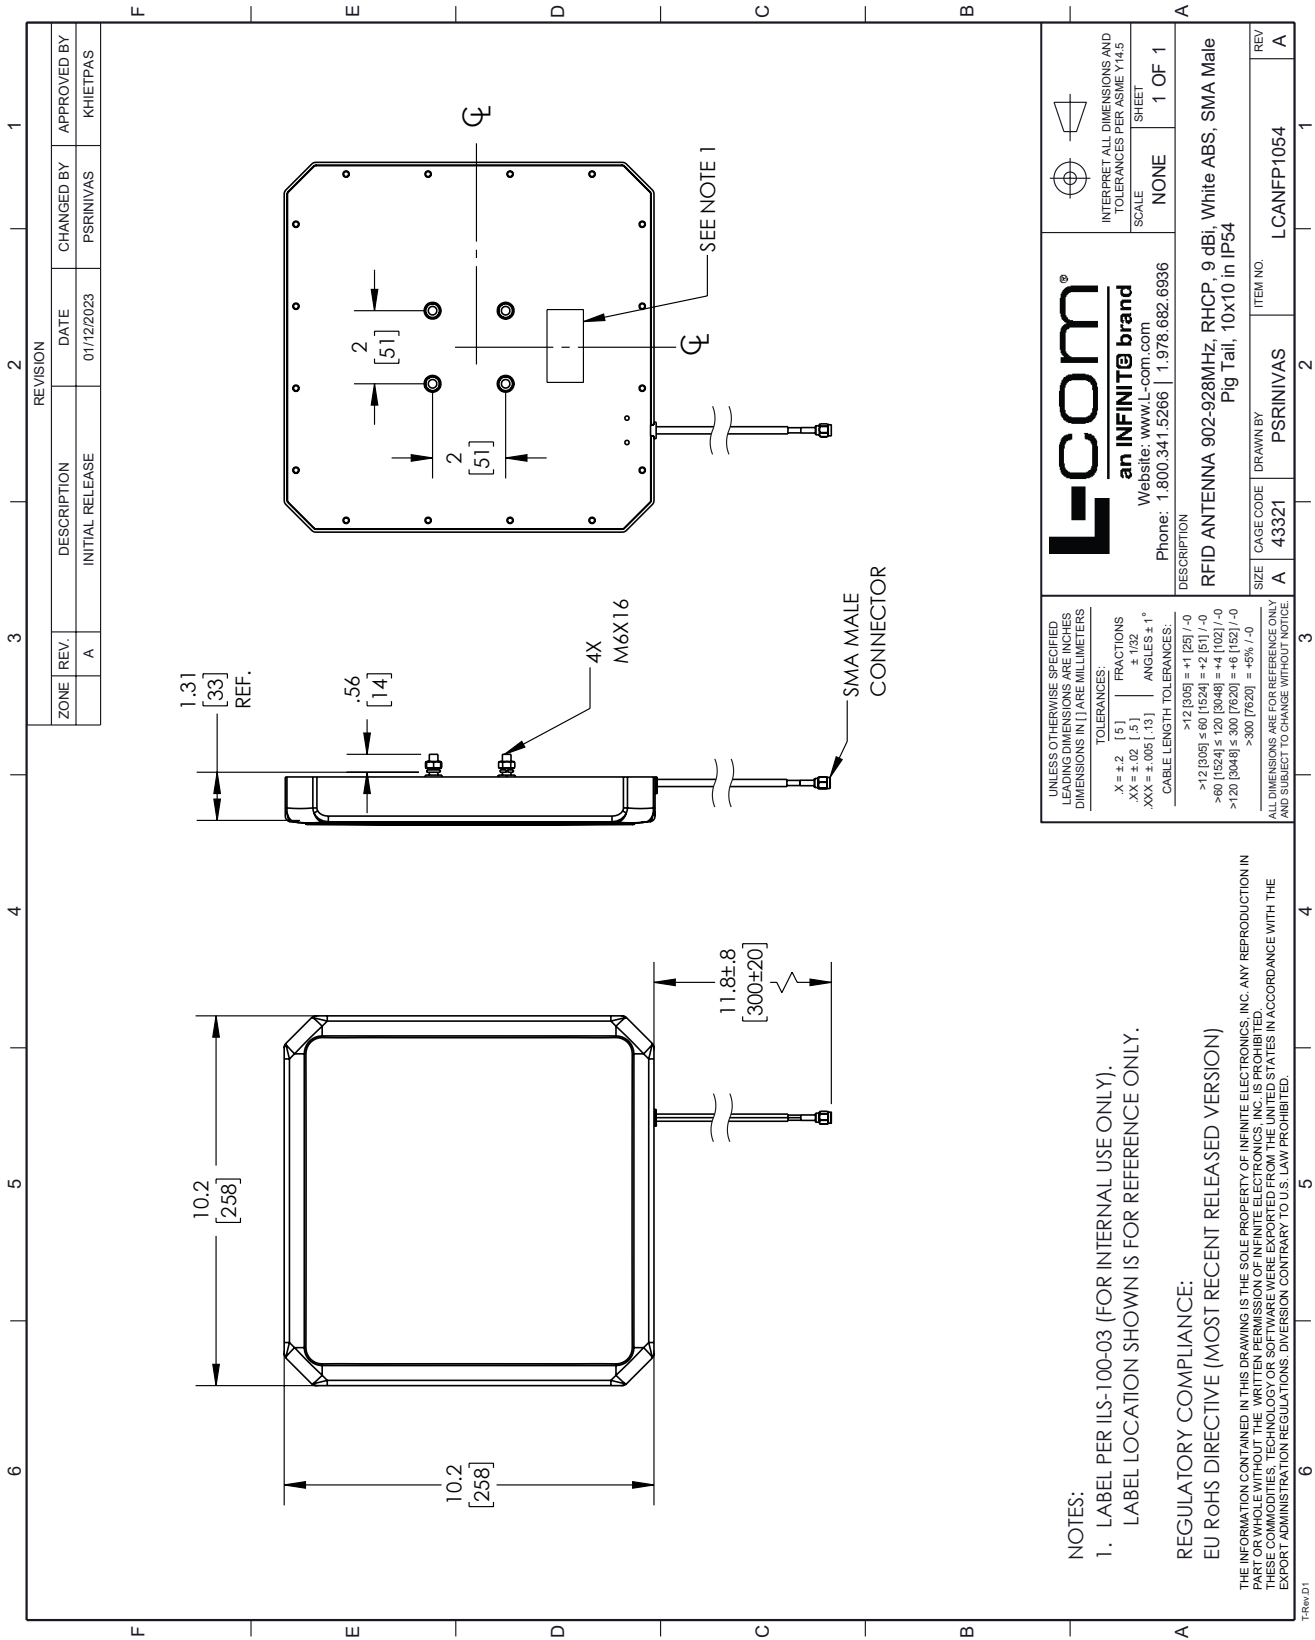

REVISION		DATE	CHANGED BY	APPROVED BY
ZONE	REV.	DESCRIPTION	INITIAL	RELEASE
	A		PSRINIVAS	KHIETPAS

L-com
an INFINITE brand
Website: www.l-com.com
Phone: 1.800.341.5266 | 1.978.682.6936

INTERPRET ALL DIMENSIONS AND TOLERANCES PER ASME Y14.5
SCALE: NONE
SHEET: 1 OF 1

DESCRIPTION: RFID ANTENNA 902-928MHz, RHCP, 9 dBi, White ABS, SMA Male Pig Tail, 10x10 in IP54

REV	REV	ITEM NO.
A	43321	LCANFP1054

UNLESS OTHERWISE SPECIFIED LEADING DIMENSIONS ARE INCHES DIMENSIONS IN [] ARE MILLIMETERS

TOLERANCES:

.X = ±.2 [5]
.XX = ±.02 [.5]
.XXX = ±.005 [.13]

FRACTIONS: ± 1/32
ANGLES ± 1°

CABLE LENGTH TOLERANCES:
>12 [305] = +1 [25] / -0
>60 [1524] ≤ 60 [1524] = +2 [51] / -0
>80 [2032] ≤ 120 [3048] = +4 [102] / -0
>120 [3048] ≤ 300 [7620] = +6 [152] / -0
>300 [7620] = +5% / -0

ALL DIMENSIONS ARE FOR REFERENCE ONLY AND SUBJECT TO CHANGE WITHOUT NOTICE

NOTES:
1. LABEL PER ILS-100-03 (FOR INTERNAL USE ONLY). LABEL LOCATION SHOWN IS FOR REFERENCE ONLY.

REGULATORY COMPLIANCE:
EU ROHS DIRECTIVE (MOST RECENT RELEASED VERSION)

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF INFINITE ELECTRONICS, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF INFINITE ELECTRONICS, INC. IS PROHIBITED. THIS DRAWING IS SUBJECT TO EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.