


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SHOW ME CABLES, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF SHOW ME CABLES, INC. IS PROHIBITED.

REVISION					
ZONE	REV.	DESCRIPTION	DATE	CHANGED BY	APPROVED BY
	A	INITIAL RELEASE	01/24/2023	DMAY	DGUTTADAURO

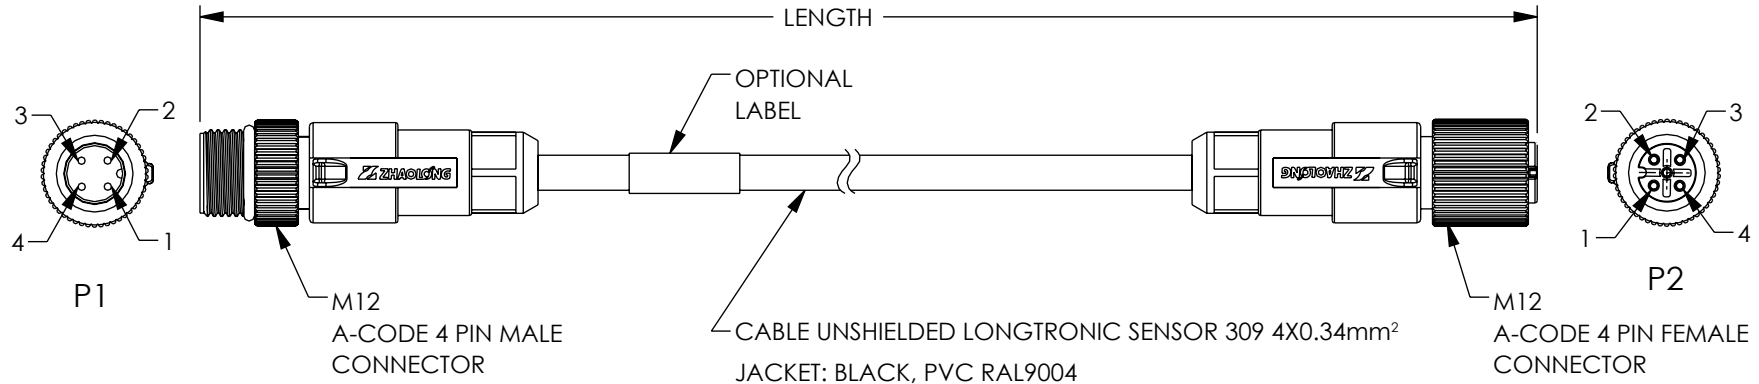

WIRING DIAGRAM

P1		P2
1	— BROWN —	1
2	— BLACK —	2
3	— WHITE —	3
4	— BLUE —	4

PART NUMBER	LENGTH	
	FEET	METERS
M12A4PVC-MF-3	3	0.9 ± .02
M12A4PVC-MF-6	6	1.8 ± .04
M12A4PVC-MF-10	10	3.0 ± .05

- NOTE:
- ELECTRICAL TEST:
 - 100% OPEN SHORT MISWIRE TEST.
 - INSULATION RESISTANCE: 10M OHM MIN, 300V/DC.
 - CONDUCTOR RESISTANCE: 3 OHM MAX.
 - OPERATING TEMPERATURE RANGE: -20°C~80°C.
 - WATERPROOF IP67.
 - CABLE ASSEMBLIES TO BE TESTED FOR CONTINUITY.
 - CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED.

REGULATORY COMPLIANCE:
EU RoHS DIRECTIVE (MOST RECENT RELEASED VERSION)

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0 ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5] FRACTIONS ± 1/32 .XX = ± .02 [5] ANGLES ± 1° .XXX = ± .005 [13]	APPROVALS	DATE	115 Chesterfield Industrial Blvd., Chesterfield, MO 63005 Phone: 1.888.519.9505 Fax: 1.888.519.9515	
	DRAWN BY DMAY	01/24/2023		
	CHECKED BY HBAKKE	01/24/2023	CATEGORY	ETHERNET
	APPROVED BY DGUTTADAURO	01/24/2023	PRODUCT DESCRIPTION	M12 4 POSITION A-CODE CABLE, PVC JACKET, MALE/FEMALE
THIRD-ANGLE PROJECTION	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	COLOR VARIATIONS MAY OCCUR	SIZE: A CAGE CODE: 3SVT8 ITEM NO.: M12A4PVC-MF SCALE: NONE CAD FILE: M12A4PVC-MF.SLDDRW	
			REV. A	
			SHEET 1 OF 1	