

REVISION					
ZONE	REV	DESCRIPTION	DATE	CHANGED BY	APPROVED
	A	INITIAL RELEASE	01/10/2024	KGLEBOVA	GUTTADAURO

F

E

D

C

B

A

F


E

D


C

B

A

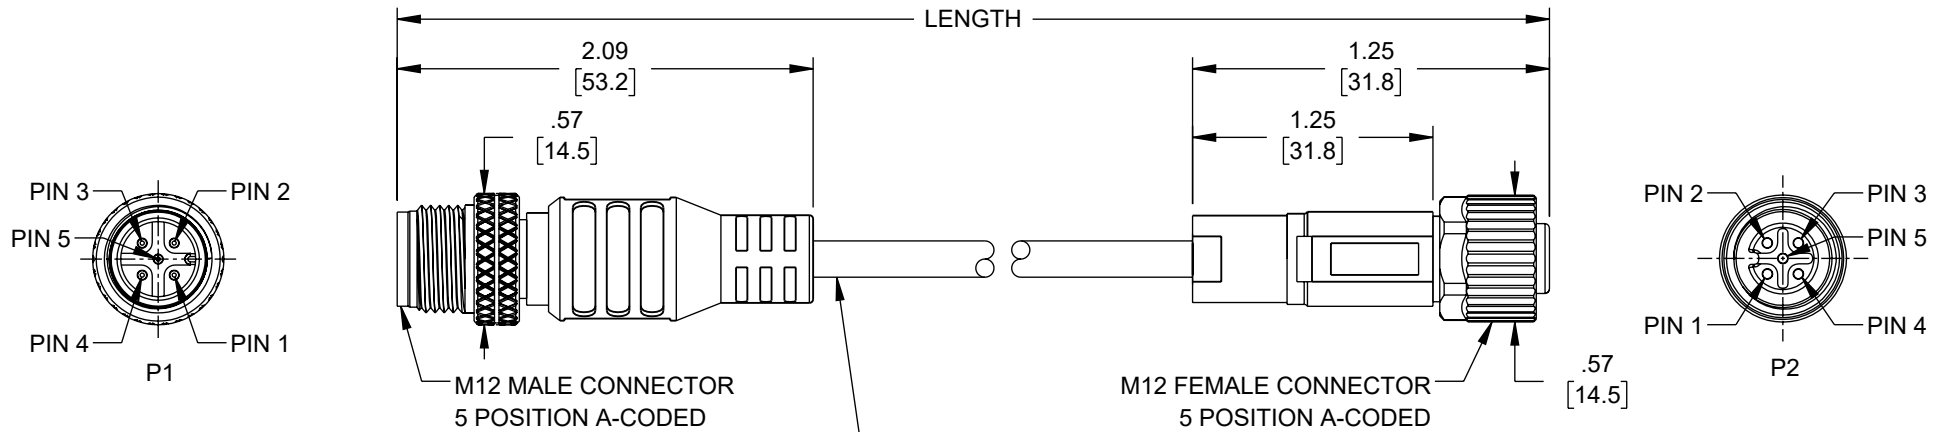

5C\*22AWG, UNSHIELDED  
 JACKET: DRAG CHAIN SUITABLE PUR;  
 NOM DIA .189±.01 [4.8±0.2]  
 COLOR: GREEN

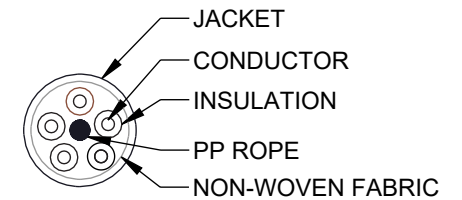

NOTES:

ELECTRICAL:

- NOMINAL VOLTAGE: 300 V.
- OPERATING VOLTAGE: 60 V DC/AC MAX.
- OPERATING CURRENT PER CONTACT: 4 A MAX.

APPLICATION:

- INGRESS PROTECTION RATING IS IP67 (MATED)
- RECOMMENDED TORQUE VALUE: 0.6 Nm
- BEND RADIUS FIXED: 38.4 mm MIN.
- BEND RADIUS MOBILE: 72 mm MIN.

ENVIRONMENTAL:

- TEMPERATURE RANGE FIXED: -25°C TO +80°C
- TEMPERATURE RANGE MOBILE: -25°C TO +70°C
- CABLE JACKET RESISTANCE: OIL
- CABLE JACKET FLAME RATING: HB (UL 94).

MISCELLANEOUS

- CABLE ASSEMBLY TO BE TESTED FOR CONTINUITY.
- CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED.

REGULATORY COMPLIANCE:

EU RoHS DIRECTIVE (MOST RECENTLY RELEASED VERSION).

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF INFINITE ELECTRONICS, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF INFINITE ELECTRONICS, INC. IS PROHIBITED. THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.

P1	WIRE MAP	P2
BROWN 1	—————	1 BROWN
WHITE 2	—————	2 WHITE
BLUE 3	—————	3 BLUE
BLACK 4	—————	4 BLACK
GRAY 5	—————	5 GRAY

ITEM NO	LENGTH [TOL.]	
	METERS [mm]	FEET [IN]
TRGA502-P2N-05M	0.5 [+35/-15]	1.64 [+1.38/- .59]
M12A502-P2N-1M	1 [+35/-20]	3.28 [+1.38/- .79]
M12A502-P2N-2M	2 [+35/-30]	6.56 [+1.38/-1.18]
M12A502-P2N-3M	3 [+35/-30]	9.84 [+1.38/-1.18]
M12A502-P2N-5M	5 [±60]	16.40 [±2.36]
M12A502-P2N-10M	10 [±80]	32.81 [±3.15]
M12A502-P2N-15M	15 [±80]	49.21 [±3.15]

UNLESS OTHERWISE SPECIFIED LEADING DIMENSIONS ARE INCHES DIMENSIONS IN [ ] ARE MILLIMETERS

TOLERANCES:

X = ±.2 [5]	FRACTIONS ± 1/32
.XX = ±.02 [0.5]	ANGLES ± 1°
.XXX = ±.005 [0.13]	

CABLE LENGTH TOLERANCES:

≤12 [305] = +1 [25] / -0
>12 [305] ≤ 60 [1524] = +2 [51] / -0
>60 [1524] ≤ 120 [3048] = +4 [102] / -0
>120 [3048] ≤ 300 [7620] = +6 [152] / -0
>300 [7620] = +5% / -0

ALL DIMENSIONS ARE FOR REFERENCE ONLY AND SUBJECT TO CHANGE WITHOUT NOTICE. UN-DIMENSIONED/NON-CRITICAL FEATURES MAY VARY IN SIZE AND LOCATION. COLORS MAY VARY.

**Show Me**  
CABLES  
an INFINIT® brand

Website: [www.ShowMeCables.com](http://www.ShowMeCables.com)  
Phone: 1.888.519.9505

INTERPRET ALL DIMENSIONS AND TOLERANCES PER ASME Y14.5

SCALE	SHEET
NONE	1 OF 1

DESCRIPTION			
IP67 WATERPROOF M12 5 POSITION A-CODE SENSOR ACTUATOR SIGNAL CABLE, INDUSTRIAL DRAG CHAIN PUR, 22AWG, MALE TO FEMALE, GREEN			
SIZE	CAGE CODE	DRAWN BY	ITEM NO.
A	3SVT8	KGLEBOVA	M12A502-P2N
			REV
			A