


REVISION					
ZONE	REV	DESCRIPTION	DATE	CHANGED BY	APPROVED
	A	INITIAL RELEASE	02/26/2024	KGLEBOVA	GUTTADAURO



"P1"  
M12 SHIELDED MALE  
CONNECTOR  
4 POSITION, D-CODED

WIRING DIAGRAM

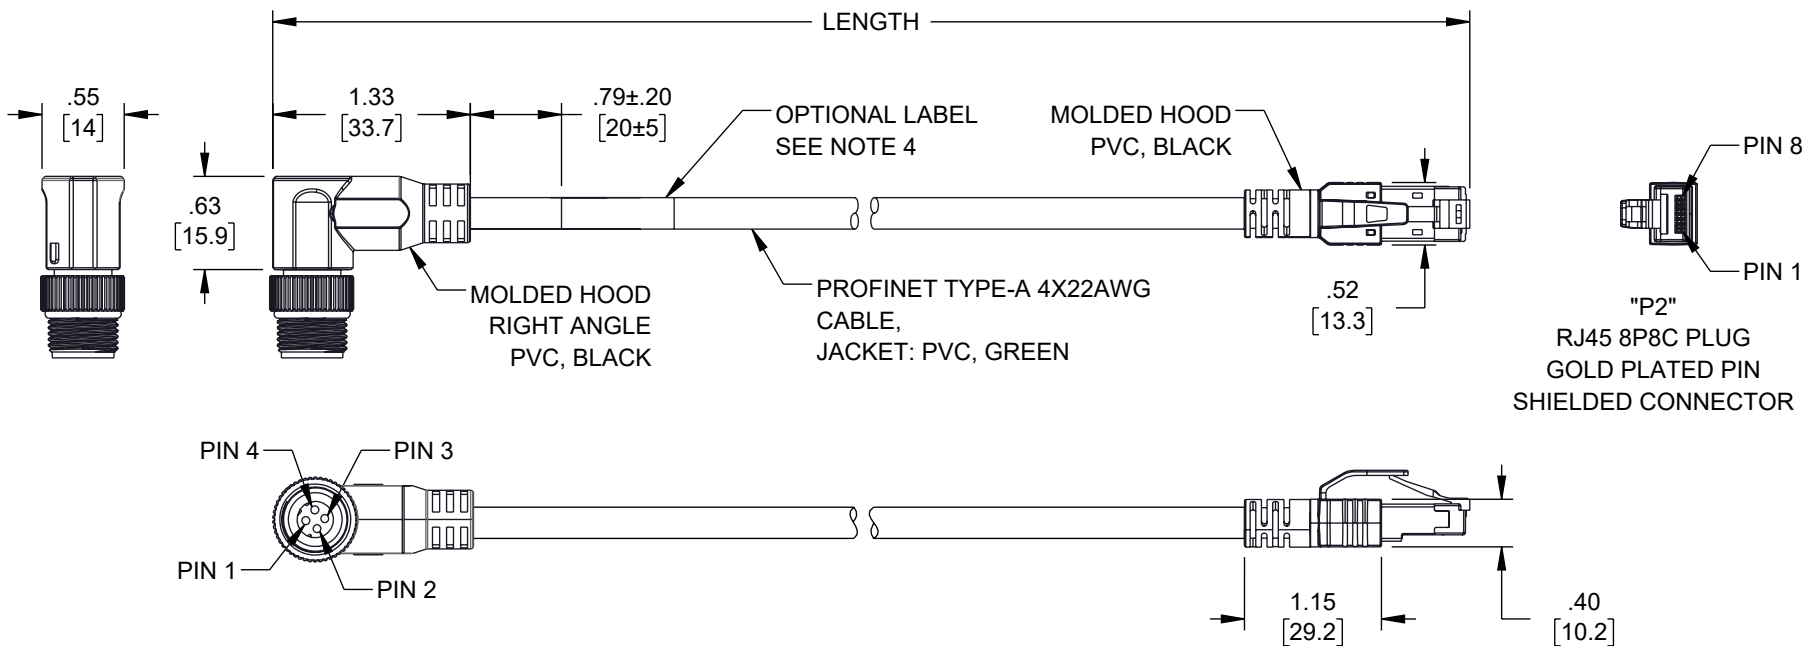

ITEM NO	LENGTH	
	METERS [mm]	FEET [IN]
M4DPAC5E-RAMRJ-1	0.305 [±20]	1 [±.79]
M4DPAC5E-RAMRJ-3	0.92 [±30]	3.02 [±1.18]
M4DPAC5E-RAMRJ-6	1.83 [±30]	6 [±1.18]
M4DPAC5E-RAMRJ-10	3.05 [±50]	10 [±1.97]
M4DPAC5E-RAMRJ-15	4.57 [±50]	15 [±1.97]
M4DPAC5E-RAMRJ-30	9.2 [±100]	30.18 [±3.94]

NOTES:

- 100% OPEN/SHORT/INTERMITTANCE TEST
- INSULATION RESISTANCE: 10 M MIN/DC 300V/10ms.
- DATA TRANSFER RATE: PASS THE PROFINET TEST.
- OPTIONAL LABEL MAY INCLUDE UL, CURRENT AND/OR WARNING.
- CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
- CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED.

REGULATORY COMPLIANCE:

EU RoHS DIRECTIVE (MOST RECENT RELEASED VERSION)

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF INFINITE ELECTRONICS, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF INFINITE ELECTRONICS, INC. IS PROHIBITED. THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.

UNLESS OTHERWISE SPECIFIED LEADING DIMENSIONS ARE INCHES DIMENSIONS IN [ ] ARE MILLIMETERS

TOLERANCES:  
 .X = ±.2 [5]      FRACTIONS ± 1/32  
 .XX = ±.02 [0.5]      ANGLES ± 1°  
 .XXX = ±.005 [0.13]

CABLE LENGTH TOLERANCES:  
 ≤12 [305] = +1 [25] / -0  
 >12 [305] ≤ 60 [1524] = +2 [51] / -0  
 >60 [1524] ≤ 120 [3048] = +4 [102] / -0  
 >120 [3048] ≤ 300 [7620] = +6 [152] / -0  
 >300 [7620] = +5% / -0

ALL DIMENSIONS ARE FOR REFERENCE ONLY AND SUBJECT TO CHANGE WITHOUT NOTICE. UN-DIMENSIONED NON-CRITICAL FEATURES MAY VARY IN SIZE AND LOCATION. COLORS MAY VARY

**Show Me**  
CABLES  
an INFINIT<sup>®</sup> brand

Website: [www.ShowMeCables.com](http://www.ShowMeCables.com)  
Phone: 1.888.519.9505

INTERPRET ALL DIMENSIONS AND TOLERANCES PER ASME Y14.5

SCALE	SHEET
NONE	1 OF 1

DESCRIPTION  
M12 4 POSITION D-CODED RA MALE/RJ45 CABLE, FOIL SHIELDED

SIZE	CAGE CODE	DRAWN BY	ITEM NO.	REV
A	3SVT8	KGLEBOVA	M4DPAC5E-RAMRJ	A