


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.



| REVISIONS | | | |
|-----------|-----------------|----------|-----------|
| REV | DESCRIPTION | DATE | APPROVED |
| A | INITIAL RELEASE | 11/18/20 | PHOSPODAR |
| | | | |
| | | | |

| WIRING MAP | | | |
|------------|----|------|---------|
| PAIR | LC | 1X12 | REF DES |
| P1 | 1 | 1 | J1 |
| | 12 | 12 | |
| P2 | 2 | 2 | |
| | 11 | 11 | |
| P3 | 3 | 3 | |
| | 10 | 10 | |
| P4 | 4 | 4 | |
| | 9 | 9 | |
| P5 | 5 | 5 | |
| | 8 | 8 | |
| P6 | 6 | 6 | |
| | 7 | 7 | |

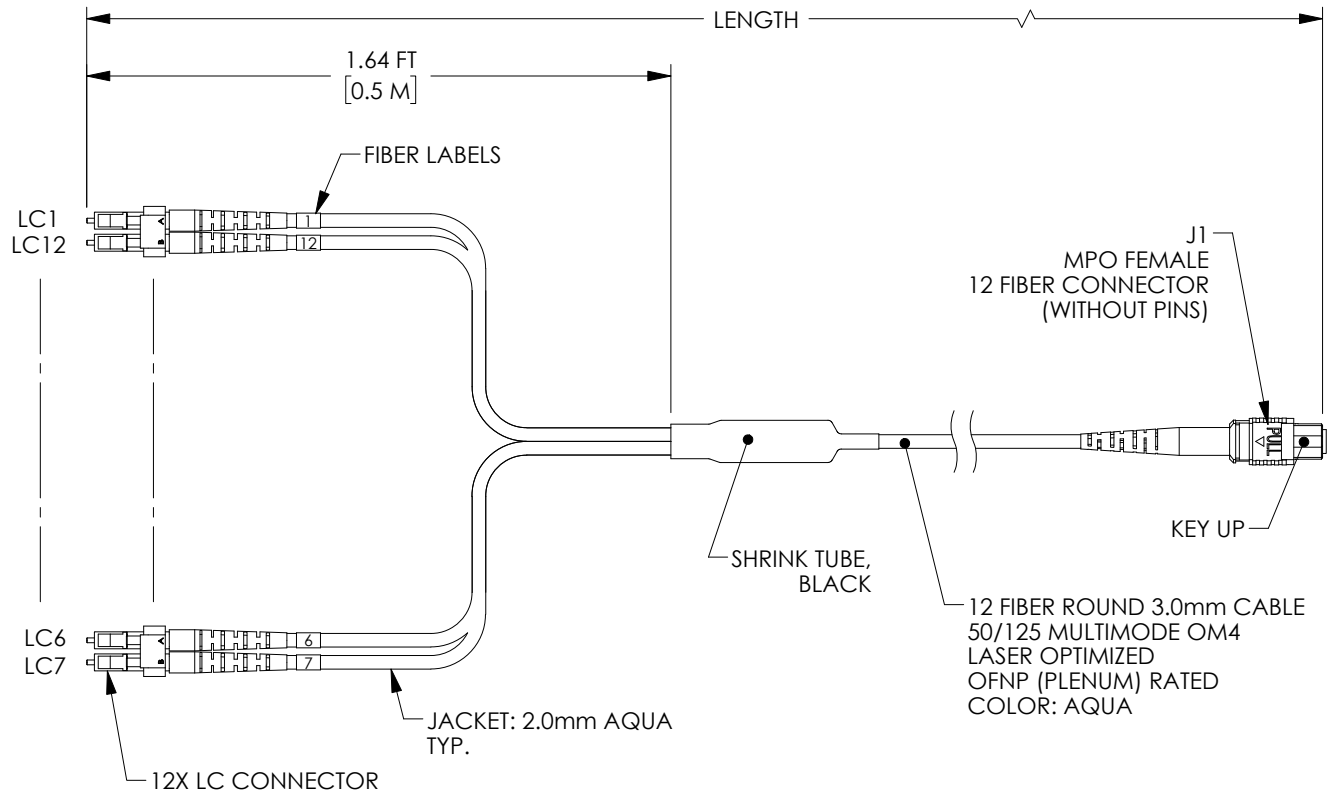

| PART NUMBER | METERS (FEET) |
|-------------------|---------------|
| MPF12OM4-20LCR-1 | 1.0 (3.28) |
| MPF12OM4-20LCR-3 | 3.0 (9.84) |
| MPF12OM4-20LCR-5 | 5.0 (16.40) |
| MPF12OM4-20LCR-10 | 10.0 (32.81) |

- NOTES:
- CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
 - CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

| | | | | |
|--|---|--|--|---------------------------------|
| UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0 ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5] FRACTIONS ± 1/32 .XX = ± .02 [.5] ANGLES ± 1° .XXX = ± .005 [.13] | APPROVALS DRAWN BY DFRISIELLO CHECKED BY PHOSPODAR APPROVED BY PHOSPODAR | DATE 11/18/2020 11/18/2020 11/18/2020 |  50 High Street, West Mill, North Andover, MA 01845 USA. Phone: 1.800.341.5266 1.978.682.6936 | |
| | THIRD-ANGLE PROJECTION  | CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY COLOR VARIATIONS MAY OCCUR | | CATEGORY FIBER OPTICS |
| SIZE A | | CAGE CODE 43321 | ITEM NO. MPF12OM4-20LCR | REV. A |
| SCALE: NONE | | CAD FILE: MPF12OM4-20LCR.SLDDRW | | SHEET 1 OF 1 |