


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	11/18/20	PHOSPODAR

WIRING MAP



PAIR	LC	1X12	REF DES
P1	1	1	P1
	12	12	
P2	2	2	
	11	11	
P3	3	3	
	10	10	
P4	4	4	
	9	9	
P5	5	5	
	8	8	
P6	6	6	
	7	7	

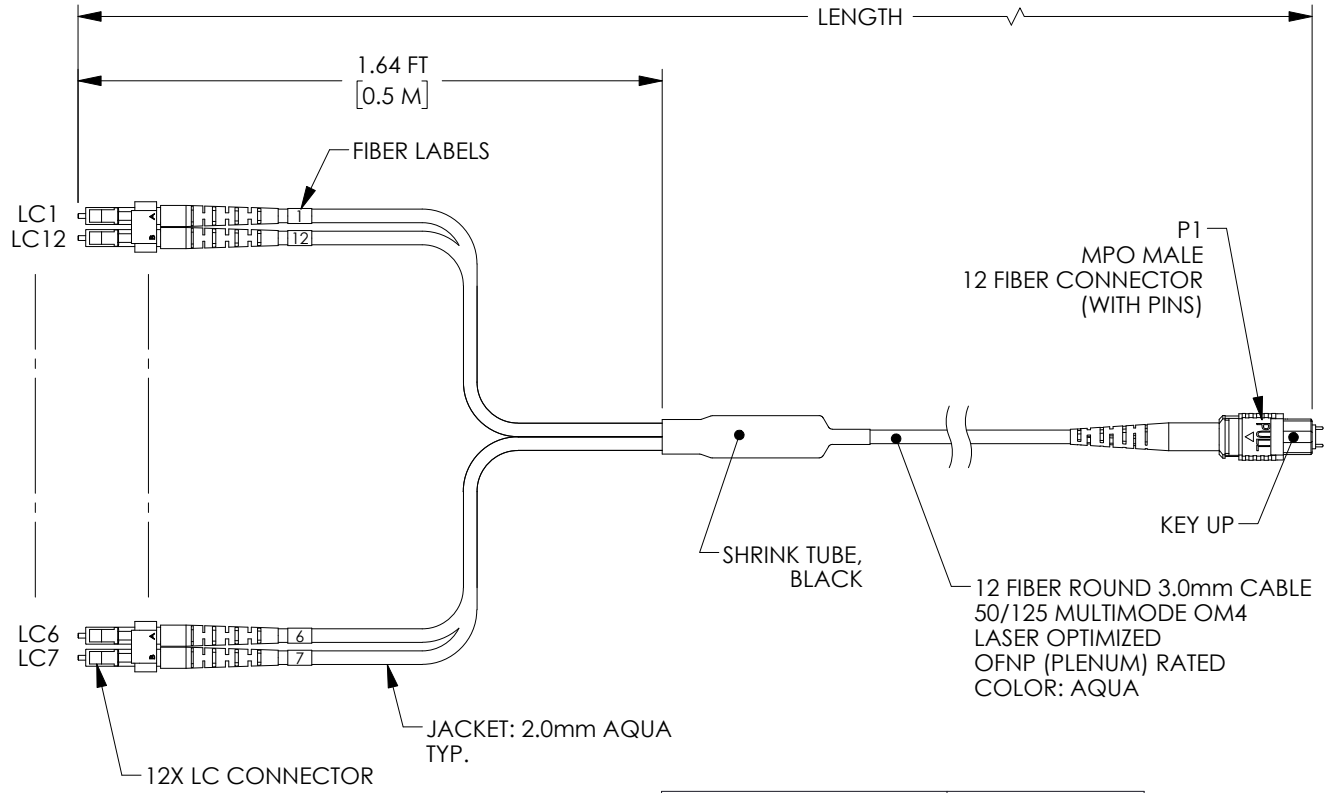

PART NUMBER	METERS (FEET)
MPM12OM4-20LCR-1	1.0 (3.28)
MPM12OM4-20LCR-3	3.0 (9.84)
MPM12OM4-20LCR-5	5.0 (16.40)
MPM12OM4-20LCR-10	10.0 (32.81)

NOTES:

- CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
- CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm]	APPROVALS	DATE	 50 High Street, West Mill, North Andover, MA 01845 USA. Phone: 1.800.341.5266 1.978.682.6936
	OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0	DRAWN BY DFRISIELLO 11/18/2020	
ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5]   FRACTIONS ± 1/32 .XX = ± .02 [.5]   ANGLES ± 1° .XXX = ± .005 [.13]	APPROVED BY PHOSPODAR 11/18/2020	CATEGORY FIBER OPTICS	PRODUCT DESCRIPTION MPO w/ pins to LC fanout fiber, 2.0mm diameter, 12 fiber, OM4 50/125um
	THIRD-ANGLE PROJECTION 	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	
COLOR VARIATIONS MAY OCCUR		CAGE CODE <b>43321</b>	ITEM NO. MPM12OM4-20LCR
SCALE: NONE		CAD FILE: MPM12OM4-20LCR.SLDDRW	REV. <b>A</b>