
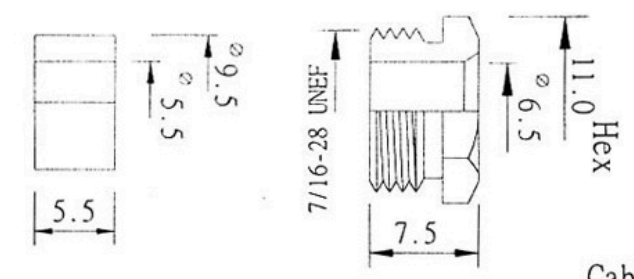



Show Me

CABLES

REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

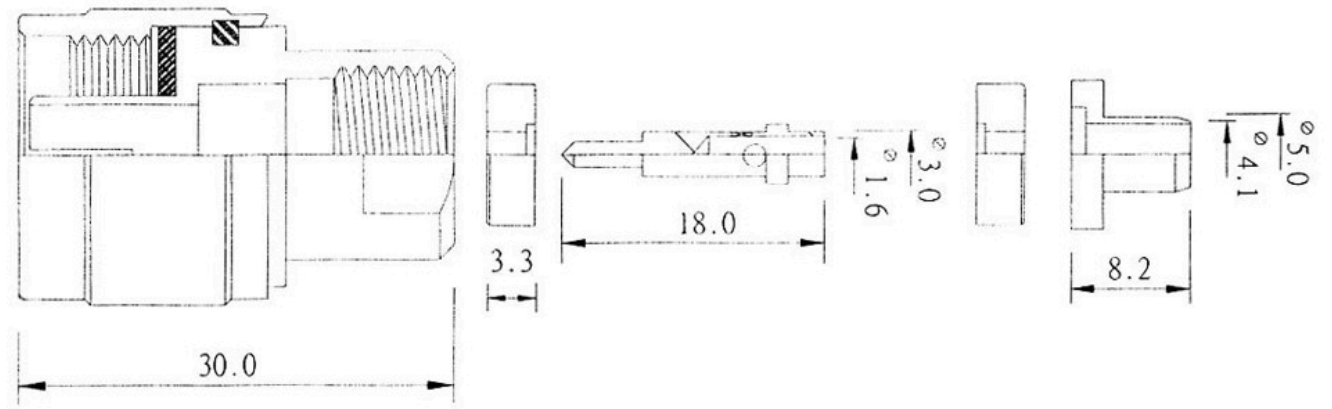

Cable Stripping



Impedance	50Ω
Frequency range	0 - 11 GHz
Voltage rating	1500 volts peak
Dielectric withstanding voltage	2500 volts rms
VSWR	M39012 straight connectors: 1.3 max.0-11.0GHz M39012 right angle: 1.35 max.0-11.0GHz
Other (MIL-C-39012 Cable Connectors)	Contact resistance: center contact 1.0 milliohm outer contact 0.2 milliohm Insertion loss: 0.15db max at 10 GHz Insulation resistance: 5000 megohms(min)

6	Rubber	Silicon	Red
5	Braid Clamp	Brass	Silver
4	Nut	Brass	Nickel
3	Isolation	Delrin	White
2	Contact	Brass	Gold
1	Body	Brass	Nickel
NO	Description	Material	Finish

N PLUG CLAMP FOR 8X CABLE

BY	DATE	PART NO	
DRAWN			
CHK'D			
APPRV			
MATERIAL		UNITS	
FINISH			
	SCALE	NONE	SHEET
			1 OF 1