
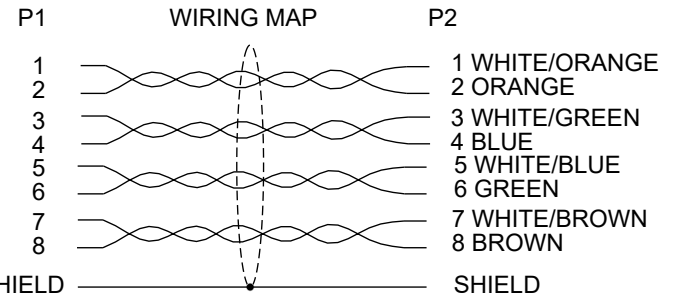
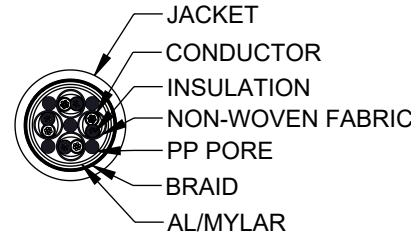


REVISION					
ZONE	REV	DESCRIPTION	DATE	CHANGED BY	APPROVED
	A	INITIAL RELEASE	01/11/2024	KGLEBOVA	GUTTADAURO

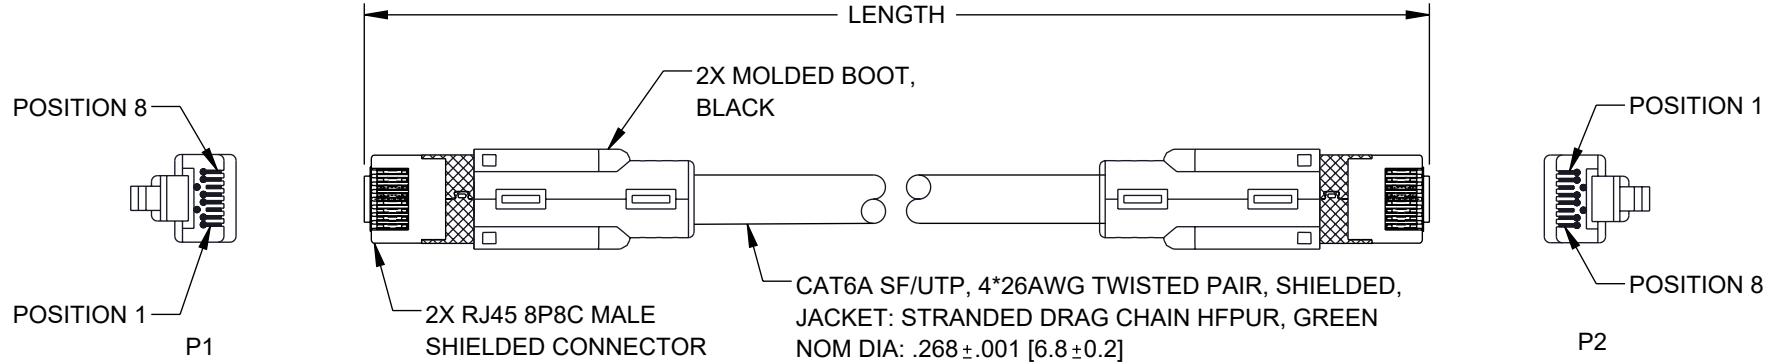

NOTES:

PHYSICAL:

- CONDUCTOR TYPE: 26AWG, STRANDED BC.
- INSULATION: HDPE.
- CONDUCTOR DIA: 0.98±0.05mm.
- CONNECTOR: 50U" GOLD PLATED.
- MINIMUM AVERAGE CABLE THICKNESS: 0.8 mm.
- CONNECTOR MATERIAL: PC.
- CONTACT MATERIAL: COPPER ALLOY, GOLD PLATING - 50µm.

ELECTRICAL:

- BANDWIDTH: 5000 MHz.
- NOMINAL VOLTAGE RATING: 30 V.
- RESISTANCE: 7.89Ω/100m (MAXIMUM).
- IMPEDANCE: 100Ω.
- CAPACITANCE: 5600pf/100m.
- PROPAGATION DELAY: 545ns/100m (MAXIMUM).
- DELAY SKEW: 45ns/100m (MAXIMUM).
- PASS FLUKE DSX 8000 CHANNEL TEST.

ENVIRONMENTAL:

- INSTALLATION TEMPERATURE RANGE: 0°C TO ~50°C
- OPERATING TEMPERATURE RANGE: -40°C TO ~80°C

MISCELLANEOUS

- CABLE ASSEMBLY TO BE TESTED FOR CONTINUITY.
- CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED.

REGULATORY COMPLIANCE:

EU RoHS DIRECTIVE (MOST RECENTLY RELEASED VERSION).

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF INFINITE ELECTRONICS, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF INFINITE ELECTRONICS, INC. IS PROHIBITED. THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.

ITEM NO	LENGTH [TOL.]	
	METERS [mm]	FEET [IN]
PC601-0.5M	0.5 [+35/-15]	1.64 [+1.38/- .59]
PC601-1M	1 [+35/-20]	3.28 [+1.38/- .79]
PC601-2M	2 [+35/-30]	6.56 [+1.38/-1.18]
PC601-3M	3 [+35/-30]	9.84 [+1.38/-1.18]
PC601-5M	5 [±60]	16.40 [±2.36]
PC601-10M	10 [±80]	32.81 [±3.15]

UNLESS OTHERWISE SPECIFIED LEADING DIMENSIONS ARE INCHES DIMENSIONS IN [] ARE MILLIMETERS

TOLERANCES:

X = ±.2 [5]	FRACTIONS ± 1/32
.XX = ±.02 [0.5]	ANGLES ± 1°
.XXX = ±.005 [0.13]	

CABLE LENGTH TOLERANCES:

≤12 [305]	= +1 [25] / -0
>12 [305] ≤ 60 [1524]	= +2 [51] / -0
>60 [1524] ≤ 120 [3048]	= +4 [102] / -0
>120 [3048] ≤ 300 [7620]	= +6 [152] / -0
>300 [7620]	= +5% / -0

ALL DIMENSIONS ARE FOR REFERENCE ONLY AND SUBJECT TO CHANGE WITHOUT NOTICE UN-DIMENSIONED/NON-CRITICAL FEATURES MAY VARY IN SIZE AND LOCATION COLORS MAY VARY

Show Me
CABLES
an INFINIT® brand

Website: www.ShowMeCables.com
Phone: 1.888.519.9505

DESCRIPTION
PROFINET TYPE B/C CAT6A 4-PAIR RJ45-RJ45 SF/UTP DOUBLE SHIELDED 26AWG STRANDED DRAG CHAIN HIGH FLEX INDUSTRIAL OUTDOOR HFPUR GREEN

SIZE A	CAGE CODE 3SVT8	DRAWN BY KGLEBOVA	ITEM NO. PC601	REV A
-----------	--------------------	----------------------	-------------------	----------

INTERPRET ALL DIMENSIONS AND TOLERANCES PER ASME Y14.5

SCALE: NONE SHEET: 1 OF 1