

6


5

4

3

REVISION

ZONE	REV	DESCRIPTION	DATE	CHANGED BY	APPROVED
	A	INITIAL RELEASE	12/14/2023	AKRESOWSKI	GUTTADAURO

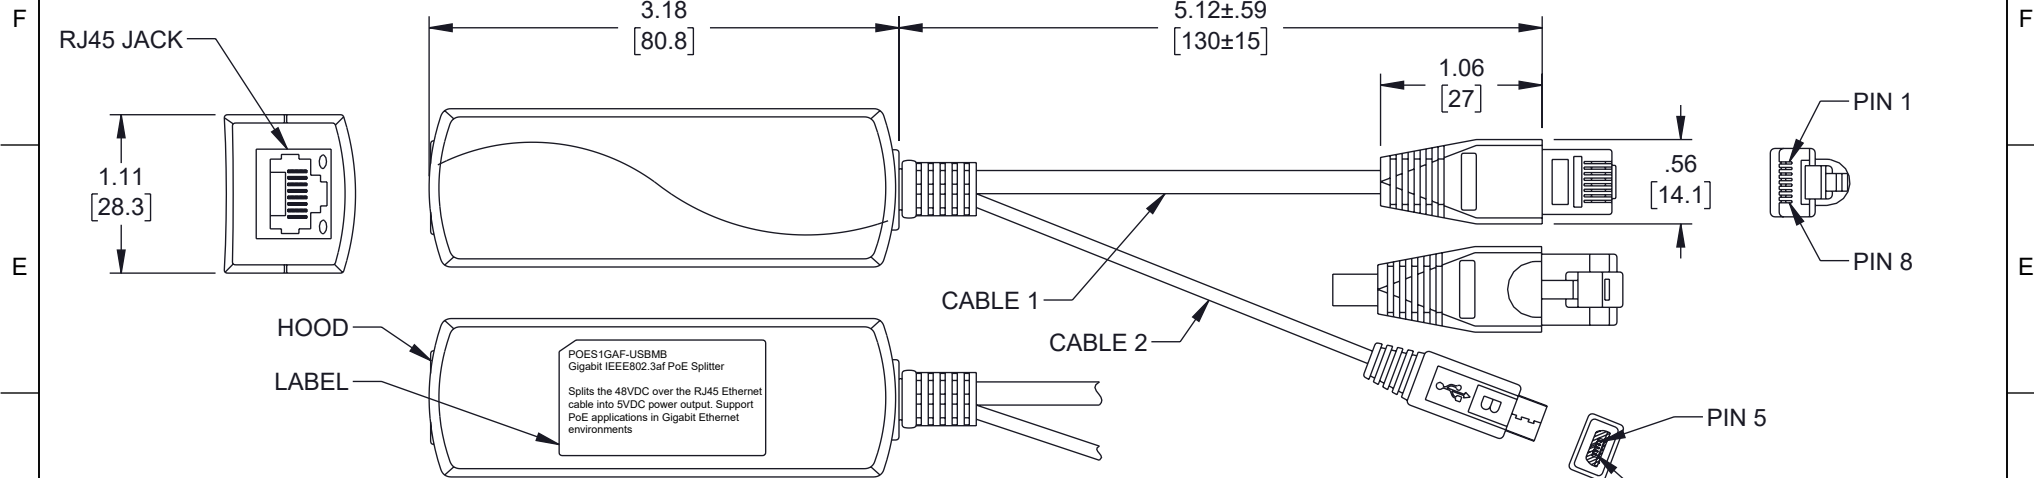

SPECIFICATIONS	
ITEM	DESCRIPTION
PORTS	1 10/100/1000M, RJ45 POE PORT (DATA+POWER IN) 1 CAT 5E, 6 LEADS, UNSHIELDED CABLE (DATA OUT) 1 MICRO USB CABLE (DC POWER OUT)
NETWORK MEDIA	10 Mbps: CAT 3, 4, 5, UNSHIELDED CABLE 100 Mbps: CAT 5, 5E, UNSHIELDED CABLE 1000 Mbps: CAT 5E, 6, UNSHIELDED CABLE
PASS THROUGH DATA RATES	10/100/1000 Mbps
POWER OUTPUT	5VDC/1A
LED	POE READY/IN USE (GRN & ORG LED ARE ALL FOR POWER)
ENVIRONMENTAL CONDITIONS	OPERATING AMBIENT TEMPERATURE: 0° TO 40° C STORAGE AMBIENT TEMPERATURE: 15° TO 50° C OPERATING HUMIDITY: 90%, NON-CONDENSING
REGULATORY COMPLIANCE	IEEE 802.3af (PoE) IEEE 802.3 (ETHERNET) IEEE 802.3u (FAST ETHERNET) IEEE 802.3ab (GIGABIT ETHERNET)

## NOTES:

- CABLE 1: UTP LAN CABLE, OUTER JACKET: BLACK PVC, OD  $\phi$ .197  $\pm$ .006 [ $\phi$ 5  $\pm$ 0.15 mm], RJ45 PLUG, GOLD PLATED PINS.
- CABLE 2: MICRO USB POWER CABLE, OUTER JACKET: BLACK PVC, OD  $\phi$ .118  $\pm$ .006 [ $\phi$ 3  $\pm$ 0.15 mm], MICRO USB BM GOLD PLATED PINS, NICKEL PLATED SHELL.
- HOOD: BLACK ABS.

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF INFINITE ELECTRONICS, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF INFINITE ELECTRONICS, INC. IS PROHIBITED. THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.

REGULATORY COMPLIANCE:  
EU RoHS DIRECTIVE (MOST RECENTLY RELEASED VERSION).

UNLESS OTHERWISE SPECIFIED LEADING DIMENSIONS ARE INCHES DIMENSIONS IN [ ] ARE MILLIMETERS		 <b>an INFINIT@ brand</b> Website: www.L-com.com Phone: 1.800.341.5266   1.978.682.6936		 INTERPRET ALL DIMENSIONS AND TOLERANCES PER ASME Y14.5	
TOLERANCES: .X = $\pm$ .2 [5]      FRACTIONS .XX = $\pm$ .02 [0.5] $\pm$ 1/32 .XXX = $\pm$ .005 [0.13]      ANGLES $\pm$ 1°				SCALE	SHEET
CABLE LENGTH TOLERANCES: $\leq$ 12 [305] = +1 [25] / -0 >12 [305] $\leq$ 60 [1524] = +2 [51] / -0 >60 [1524] $\leq$ 120 [3048] = +4 [102] / -0 >120 [3048] $\leq$ 300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0		DESCRIPTION <b>POE TO USB SPLITTER, 1-PORT, GIGABIT 10/100/1000 IEEE 802.3AF, ETHERNET DATA &amp; POWER TO MICRO USB POWER PLUS ETHERNET DATA, 48V TO 5V 1A</b>		NONE	1 OF 1
ALL DIMENSIONS ARE FOR REFERENCE ONLY AND SUBJECT TO CHANGE WITHOUT NOTICE. UN-DIMENSIONED NON-CRITICAL FEATURES MAY VARY IN SIZE AND LOCATION. COLORS MAY VARY.		SIZE	CAGE CODE	DRAWN BY	ITEM NO.
		A	43321	AKRESOWSKI	POES1GAF-USBMB
					REV
					A

6

5

4

3

2

1