



THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SHOW ME CABLES, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF SHOW ME CABLES, INC. IS PROHIBITED.

REVISION					
ZONE	REV	DESCRIPTION	DATE	CHANGED BY	APPROVED
	A	INITIAL RELEASE	06/21/2023	HBAKKE	GUTTADAURO

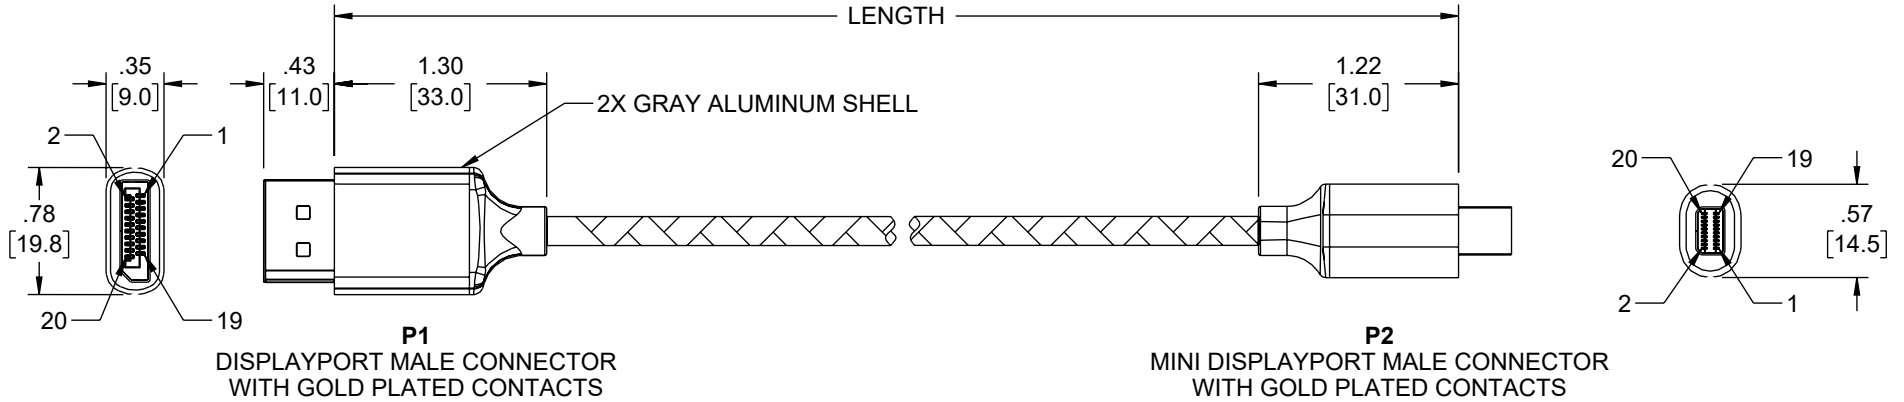

**PIN ASSIGNMENTS:**

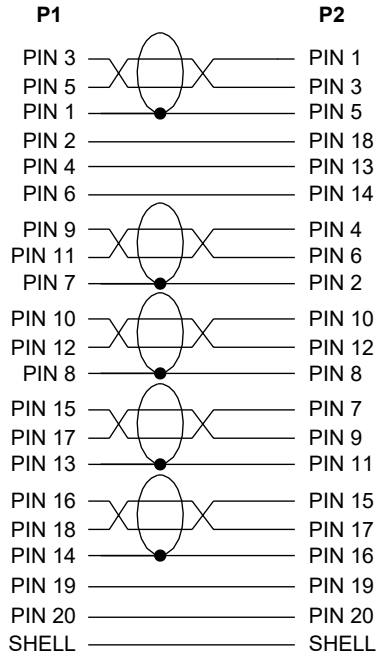

**NOTES:**

- CABLE: (7/0.08T\*1P+1C+AL+MY)\*5C+7/0.08T\*5C+ADB  
OD: 5.5mm, BLACK NYLON BRAID, JACKET: BLACK TPE (LSZH)
- ELECTRICAL TEST:
  - 100% OPEN SHORT & MISS WIRE TEST
  - CONTACT RESISTANCE: 5 OHM MAX
  - INSULATION RESISTANCE: 10M OHM MIN
  - HI-POT TEST: DC 300V/10ms
- CABLE SHALL BE TESTED FOR CONTINUITY.
- CABLE SHALL BE INDIVIDUALLY PACKAGED.

PART NUMBER	LENGTH	
	FEET	METERS
SDPMDP-LSZH4KMM-1M	3.28	1.0
SDPMDP-LSZH4KMM-3M	9.84	3.0

**REGULATORY COMPLIANCE:**

EU RoHS DIRECTIVE (MOST RECENT RELEASED VERSION)

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm]  OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0  ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5]   FRACTIONS ± 1/32 .XX = ± .02 [.5]   ANGLES ± 1° .XXX = ± .005 [.13]	APPROVALS	DATE	<b>Show Me</b> <b>CABLES</b> an INFINITI® brand		115 Chesterfield Industrial Blvd., Chesterfield, MO 63005 Phone: 1.888.519.9505 Fax: 1.888.519.9515		
	DRAWN BY HBAKKE	06/21/2023			CATEGORY		
	CHECKED BY DMAY	06/21/2023	PRODUCT DESCRIPTION		DP to MDP, M/M, LSZH, Alum Shell, 4K @ 60 Hz, Black Nylon Braid		
	APPROVED BY RCARLESCO	06/21/2023	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	COLOR VARIATIONS MAY OCCUR	SIZE <b>A</b>	CAGE CODE 3SVT8	ITEM NO. SDPMDP-LSZH4KMM
THIRD-ANGLE PROJECTION	SCALE: NONE		CAD FILE: SDPMDP-LSZH4KMM.SLDDRW		SHEET 1 OF 1		