


LTR	DESCRIPTION	DATE	BY
-	Released	6/14/00	JCL

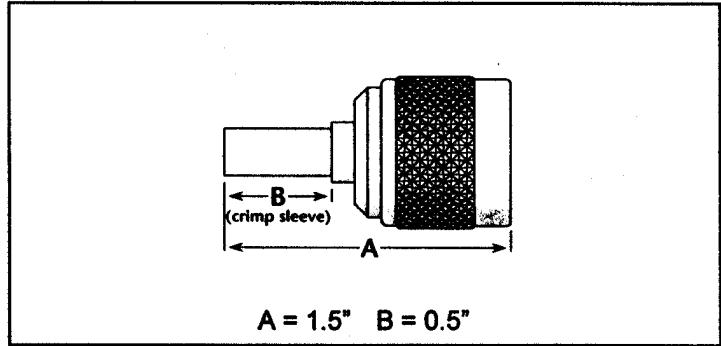

I. MATERIALS & FINISHES

- center contact: Gold Plated Beryllium Copper – female pin
- outer contact: Nickel Plated Brass
- body: Nickel Plated Brass
- coupling nut: Nickel Plated Brass
- crimp sleeve: Nickel Plated Copper
- dielectric: Teflon® PTFE
- gasket: Silicone Rubber
- shrink sleeve: Adhesive Lined Polyolefin
- crimp size: .213" hex (M22520/5-19)

II. ELECTRICAL PROPERTIES

- impedance: 50 ohms
- working voltage: 1000 vrms (max)
- vswr: 1.25:1 (max) up to 3 GHz
- insertion loss: 0.1 x \sqrt{f} ghz

Unless otherwise specified, dimensions are in inches. Tolerances are applicable when specified.

These drawings and specifications contain proprietary information which is the property of Times Microwave Systems.

Approvals

Drawn	JCL	6/14/00



TIMES MICROWAVE SYSTEMS

Wallingford, CT 06492
 (203) 949-8400; (203) 949-8423.Fax
 www.timesmicrowave.com

TC-200-NM-RP

Reverse Polarity Type-N Male (female pin)
 for LMR-200 Cable

Size A	CAGE CODE 68999	Drawing No.: 3190-959
-----------	--------------------	--------------------------

Scale: NA Rev. () Sheet: 1 of 1