




THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	6/10/21	DGUTTADAURO




"P1"

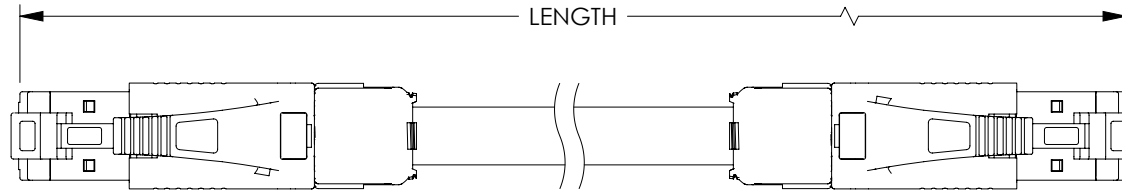

PIN 1


"P2"

MODEL NUMBER	LENGTH FEET [METERS]
TRD524DSHF-TEL-1F	1.0 [0.30]
TRD524DSHF-TEL-3F	3.0 [0.91]
TRD524DSHF-TEL-5F	5.0 [1.52]
TRD524DSHF-TEL-10F	10.0 [3.05]
TRD524DSHF-TEL-15F	15.0 [4.57]
TRD524DSHF-TEL-25F	25.0 [7.62]
TRD524DSHF-TEL-50F	50.0 [15.24]
TRD524DSHF-TEL-75F	75.0 [22.86]
TRD524DSHF-TEL-100F	100.0 [30.48]
TRD524DSHF-TEL-150F	150.0 [45.72]
TRD524DSHF-TEL-200F	200.0 [60.96]
TRD524DSHF-TEL-250F	250.0 [76.20]

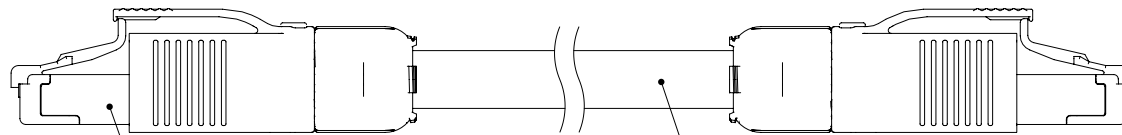

2X RJ45 PLUG SHIELDED



CAT 5e, 4 TWISTED PAIR, 22AWG STRANDED 600V PoE, SF/UTP DOUBLE SHIELDED FOIL + BRAID OUTDOOR INDUSTRIAL JACKET: HIGH FLEX PLTC-ITC-2463 TPE, TEAL

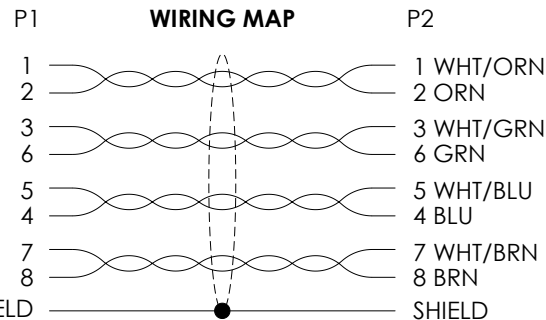

NOTES:

- CABLE CHARACTERISTICS:
 FLEX LIFE: 1 MILLION CYCLE TEST (10X CABLE O.D. MIN. RAD.)
 10 MILLION CYCLE TEST (20X CABLE O.D. MIN. RAD.)
 TEMPERATURE RATING: -40°C TO +75°C
 VOLTAGE RATING: 600 V
 POE COMPLIANT (802.3) TO 100 METERS WHEN INSTALLED PER RECOMMENDATIONS IN TIA TSB-184.
 AGENCY APPROVALS: PLTC-ITC-UL AWM STYLE 2463
 CABLE JACKET IS WELD SPATTER, SUNLIGHT (UV) AND CUTTING/MACHINING OIL RESISTANT.
 CABLE OD: 0.345"

1. PLUG CONFORMS TO TIA-1096
2. CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
3. CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM PACKAGING SPECIFICATION PS-0031.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0 ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5] FRACTIONS ± 1/32 .XX = ± .02 [5] ANGLES ± 1° .XXX = ± .005 [13]	APPROVALS	DATE	 50 High Street, West Mill, North Andover, MA 01845 USA. Phone: 1.800.341.5266 1.978.682.6936	
	DRAWN BY DMAY	06/09/21		CATEGORY TELECOM/MODULAR
	CHECKED BY DGUTTADAURO	6/10/21		
	APPROVED BY DGUTTADAURO	6/10/21		
THIRD-ANGLE PROJECTION	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	PRODUCT DESCRIPTION C5e SF/UTP 22STR 600V PoE PLTC-ITC TPE TEL	SCALE: NONE CAD FILE: TRD524DSHF-TEL.SLDDRW SHEET 1 OF 1	
	COLOR VARIATIONS MAY OCCUR	SIZE A CAGE CODE 43321 ITEM NO. TRD524DSHF-TEL REV. A		