




THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

| REVISION | | | | | |
|----------|-----|-----------------|------------|------------|------------|
| ZONE | REV | DESCRIPTION | DATE | CHANGED BY | APPROVED |
| | A | INITIAL RELEASE | 09/12/2023 | DZINN | GUTTADAURO |

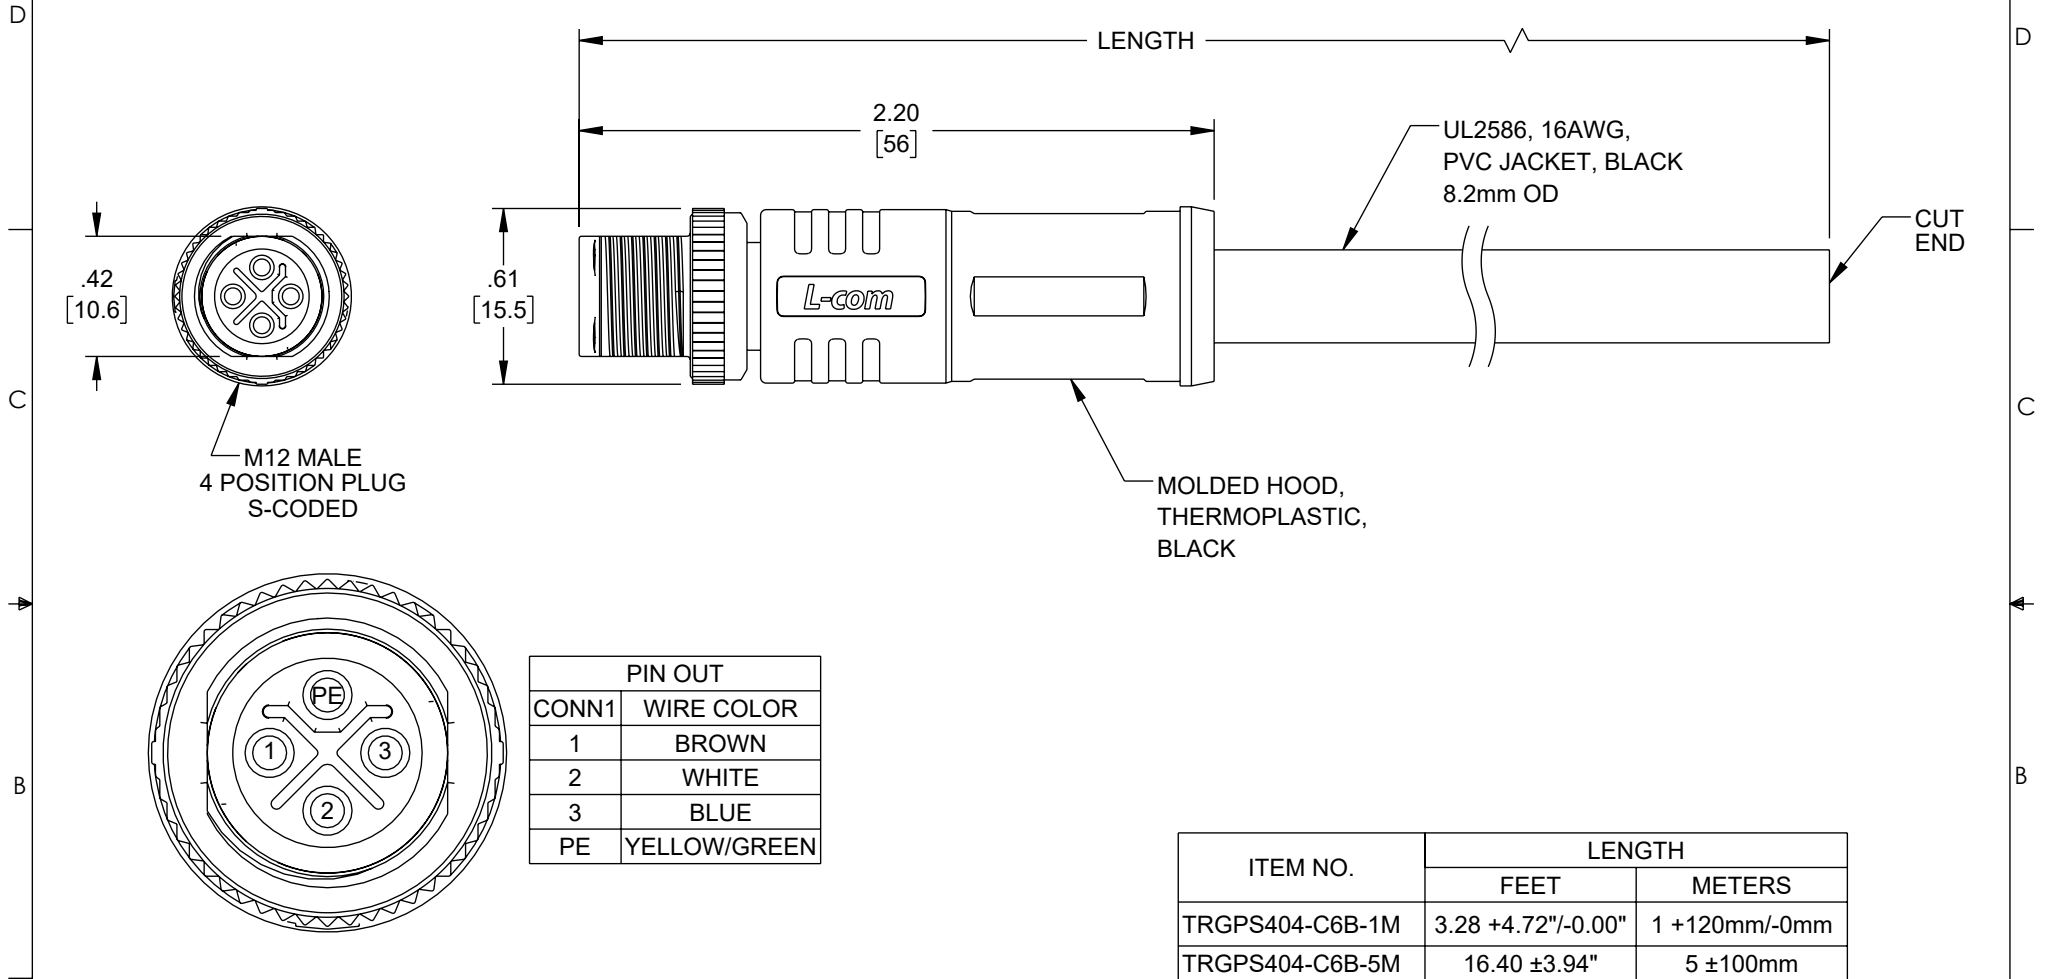

| ITEM NO. | LENGTH | |
|-----------------|--------------------|---------------|
| | FEET | METERS |
| TRGPS404-C6B-1M | 3.28 +4.72"/-0.00" | 1 +120mm/-0mm |
| TRGPS404-C6B-5M | 16.40 ±3.94" | 5 ±100mm |

- NOTES:
1. WATERPROOF RATING: IP68 1/M24H (MATED).
 2. NUT: THERMOPLASTIC, BLACK.
 3. PINS: COPPER ALLOY, GOLD PLATED.
 4. O-RING: RUBBER, GREEN.
 5. CABLE ASSEMBLIES INDIVIDUALLY PACKAGED.
 6. CABLE ASSEMBLIES TO BE TESTED FOR CONTINUITY.

| | | | | |
|---|---|--|---|---|
| UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0 ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5] FRACTIONS ± 1/32 .XX = ± .02 [5] ANGLES ± 1° .XXX = ± .005 [1.3] | APPROVALS DRAWN BY: DZINN CHECKED BY: APPROVED BY: DGUST DATE: 09/12/2023 | DATE: 09/12/2023 |  an INFINITI® brand | 50 High Street, West Mill, North Andover, MA 01845 USA. Phone: 1.800.341.5266 1.978.682.6936 |
| | THIRD-ANGLE PROJECTION  | CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY | COLOR VARIATIONS MAY OCCUR | CATEGORY: TELECOM/MODULAR PRODUCT DESCRIPTION: M12 4 POS IP68 S-CODE PIGTAIL CABLE ASSY, UNSHIELDED 16AWG PVC JACKET, MALE TO CUT END, BLACK |
| SCALE: NONE | | CAD FILE: TRGPS404-C6B.SLDDRW | | SHEET 1 OF 1 |