

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

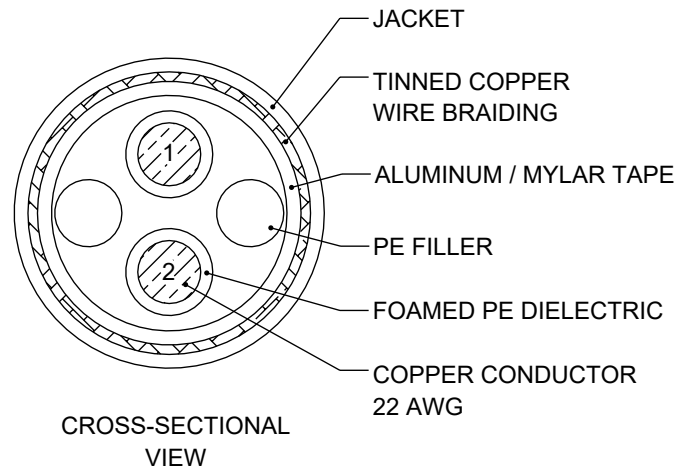
REVISION					
ZONE	REV	DESCRIPTION	DATE	CHANGED BY	APPROVED
	A	INITIAL RELEASE	06/12/2023	SREITER	GUTTADAURO

1. CONSTRUCTION:

1. CONDUCTOR: SOLID PLAIN ANNEALED BARE COPPER WIRE 0.643 +0 / -0.015 mm (22 AWG).
2. INSULATION: FOAM-PE, 1.49 ±0.05 mm
3. TWISTING: 1 TWISTED PAIR, 2 SINGLE CONDUCTORS PAIRED
4. TWISTED PAIR COLOR CODE:
  1. WHITE
  2. BLUE
5. SHIELDING (1): TINNED COPPER WIRE BRAIDING, MIN. 85% COVERAGE.
6. SHIELDING (2): ALUMINUM / MYLAR TAPE, WRAPPED ALUMINUM SIDE FACE-OUT.
7. OUTER DIAMETER: 4.6 ±0.3 mm
8. JACKET COLOR: GREEN

2. MECHANICAL PROPERTIES:



1. BEND RADIUS:
  1. ≥4X OD WITHOUT LOAD
  2. ≥8X OD WITH LOAD
2. TEMPERATURE RANGE:
  1. DURING OPERATION: -40°C UP TO 80°C
  2. DURING INSTALLATION: 0°C UP TO 50°C
3. FIRE RATING:
  1. MATERIAL: PUR
  2. FIRE RATING: IEC 60332-1
4. OIL RESISTANCE TO UL 758 60°C
5. UV RESISTANCE TO IEC 60068-2-5



6. MECHANICAL PROPERTIES	TESTING METHOD	UNIT	SPECIFICATION
1. TENSILE INITIAL	UL 758	Mpa	MIN. 10.3
2. ELONGATION INITIAL	UL 758	%	MIN. 100
3. TENSILE HEAT AGING	UL 758	%	70
4. ELONGATION HEAT AGING	UL 758	%	65

CABLE LENGTH		
PART NO.	FEET	METERS
TSPE02-05M	16.4	5
TSPE02-10M	32.8	10

3. REFERENCE STANDARD: IEC 61156-13

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0 ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5]   FRACTIONS ± 1/32 .XX = ± .02 [5]   ANGLES ± 1° .XXX = ± .005 [1.3]	APPROVALS	DATE	 50 High Street, West Mill, North Andover, MA 01845 USA. Phone: 1.800.341.5266 1.978.682.6936	
	DRAWN BY SREITER	06/12/2023		CATEGORY <b>BULK CABLE</b>
	CHECKED BY DGUST	06/12/2023		
	APPROVED BY GUTTADAURO	06/12/2023		
THIRD-ANGLE PROJECTION 	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	PRODUCT DESCRIPTION <b>SINGLE PAIR ETHERNET (SPE) BULK SF/TP 22AWG SOLID, PUR GREEN, PER METER</b>	SIZE: <b>A</b> CAGE CODE: <b>43321</b> ITEM NO.: <b>TSPE02</b>	
COLOR VARIATIONS MAY OCCUR		SCALE: NONE	CAD FILE: TSPE02.SLDDRW	REV. <b>A</b>

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.



REVISION					
ZONE	REV	DESCRIPTION	DATE	CHANGED BY	APPROVED
	A	INITIAL RELEASE	06/12/2023	SREITER	GUTTADAURO

1. ELECTRICAL PROPERTIES (AT 20°C ±5°C)

- |    |   |                              |
|----|---|------------------------------|
| 1. | DC RESISTANCE:                          | MAX. 6.03 Ω / 100 m AT 20°C  |
| 2. | RESISTANCE UNBLANCE:                    | MAX. 2% AT 20°C              |
| 3. | INSULATION RESISTANCE (500V):           | MIN. 5000 MΩ / Km AT 20°C    |
| 4. | MUTUAL CAPACITANCE:                     | MAX. 5.6 nf / 100 m AT 1 kHz |
| 5. | CAPACITANCE UNBALANCE (PAIR TO GROUND): | MAX 160 pf / 100 m AT 1 kHz  |
| 6. | NOMINAL VELOCITY OF PROPOGATION:        | NOM. 67%                     |
| 7. | TEST VOLTAGE (AC, 1 min):               | 2 kV / 1 min                 |
| 8. | COUPLING ATTENUATION:                   | TYPE I                       |

2. TRANSMISSION PERFORMANCE ACC. TO IEC 61156-13 (AT 20°C / 100 m):

1.	FREQUENCY	IMPEDANCE (Ω)	INSERTION LOSS (dB) MAX.	RETURN LOSS (dB) MIN.	PROPAGATION DELAY (ns) MAX.
2.	1	100 ±15	2.0	20.0	570
3.	4	100 ±15	3.6	23.0	552
4.	10	100 ±15	5.7	25.0	545
5.	16	100 ±15	7.2	25.0	543
6.	20	100 ±15	8.1	25.0	542

<p>UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm]</p> <p>OVERALL CABLE LENGTH TOLERANCE:            ≤12 [305] = +1 [25] / -0            &gt;12 [305] ≤60 [1524] = +2 [51] / -0            &gt;60 [1524] ≤120 [3048] = +4 [102] / -0            &gt;120 [3048] ≤300 [7620] = +6 [152] / -0            &gt;300 [7620] = +5% / -0</p> <p>ALL OTHER DIMENSIONAL TOLERANCES:            .X = ± .2 [5]   FRACTIONS ± 1/32            .XX = ± .02 [.5]   ANGLES ± 1°            .XXX = ± .005 [.13]</p> <p>THIRD-ANGLE PROJECTION</p> 	APPROVALS	DATE	 <p>50 High Street, West Mill, North Andover, MA 01845 USA. Phone: 1.800.341.5266 1.978.682.6936</p>	
	DRAWN BY SREITER	06/12/2023		<p>CATEGORY</p> <p><b>BULK CABLE</b></p>
	CHECKED BY DGUST	06/12/2023		
	APPROVED BY GUTTADAURO	06/12/2023		
CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	PRODUCT DESCRIPTION			
COLOR VARIATIONS MAY OCCUR	<p>SINGLE PAIR ETHERNET (SPE) BULK SF/TP 22AWG SOLID, PUR GREEN, PER METER</p>			
	SIZE <b>A</b>	CAGE CODE 43321	ITEM NO. TSPE02	REV. <b>A</b>
	SCALE: NONE	CAD FILE: TSPE02.SLDDRW	SHEET 2 OF 2	