


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISION					
ZONE	REV	DESCRIPTION	DATE	CHANGED BY	APPROVED
	A	INITIAL RELEASE	07/27/2023	LNAGARAJ	RCARLESCO

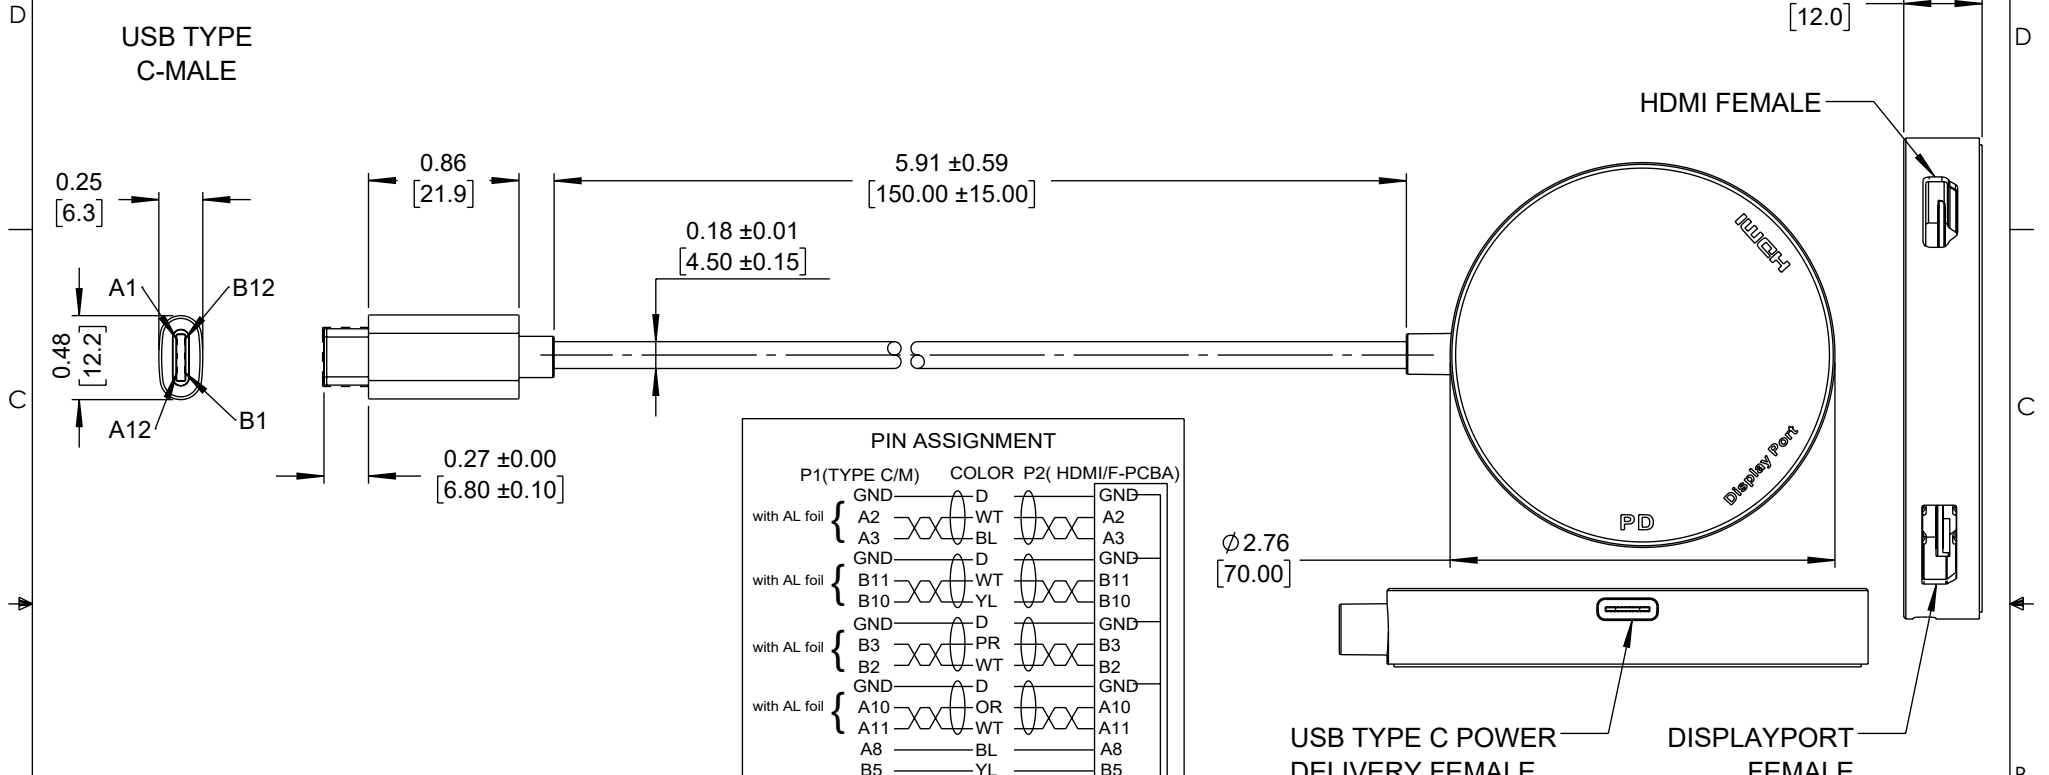

TEST CONDITIONS:

- 100% OPEN, SHORT AND SWAP TEST.
- ON-RESISTANCE: 2 OHMS MAX.
- INSULATION RESISTANCE: 10 MEGAOHM MIN/DC300V/10MS (WIRE END)
- OUR CUTTING-EDGE TESTING PROCESS UTILIZES THE TYPE C INTERFACE WITH A NOTEBOOK TO ASSESS DISPLAY PERFORMANCE. WE CONDUCT SEPARATE TESTS FOR HDMI/DP INTERFACES, ACHIEVING AN IMPRESSIVE RESOLUTION OF 7680 * 4320@30HZ. SIMULTANEOUSLY TESTING BOTH INTERFACES ENSURES A RESOLUTION SUPPORT OF 3840 * 2160@60HZ. ADDITIONALLY, OUR POWER DELIVERY 3.0 PORT OFFERS EXCEPTIONAL REVERSE SUPPORT, ENABLING FAST CHARGING OF DEVICES UP TO 100W (20V 5A).

NOTE:

- ALL MARKINGS ARE FOR REFERENCE ONLY.
- PRODUCT SHALL BE INDIVIDUALLY PACKAGED.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0 ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5] FRACTIONS ± 1/32 .XX = ± .02 [5] ANGLES ± 1° .XXX = ± .005 [13]	APPROVALS DRAWN BY LNAGARAJ CHECKED BY RCARLESCO APPROVED BY GUITADAURO	DATE 07/27/2023 07/28/2023 07/28/2023	50 High Street, West Mill, North Andover, MA 01845 USA. Phone: 1.800.341.5266 1.978.682.6936
	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY COLOR VARIATIONS MAY OCCUR	PRODUCT DESCRIPTION USB C DOCKING STATION, 3 PORT, 4K120HZ, 8K60HZ, 100W PD, USB C TO HDMI	CATEGORY USB C DOCKS
THIRD-ANGLE PROJECTION 	SIZE A	CAGE CODE 43321	ITEM NO. USB CDS-3P8K