



REV.	REVISION	DATE

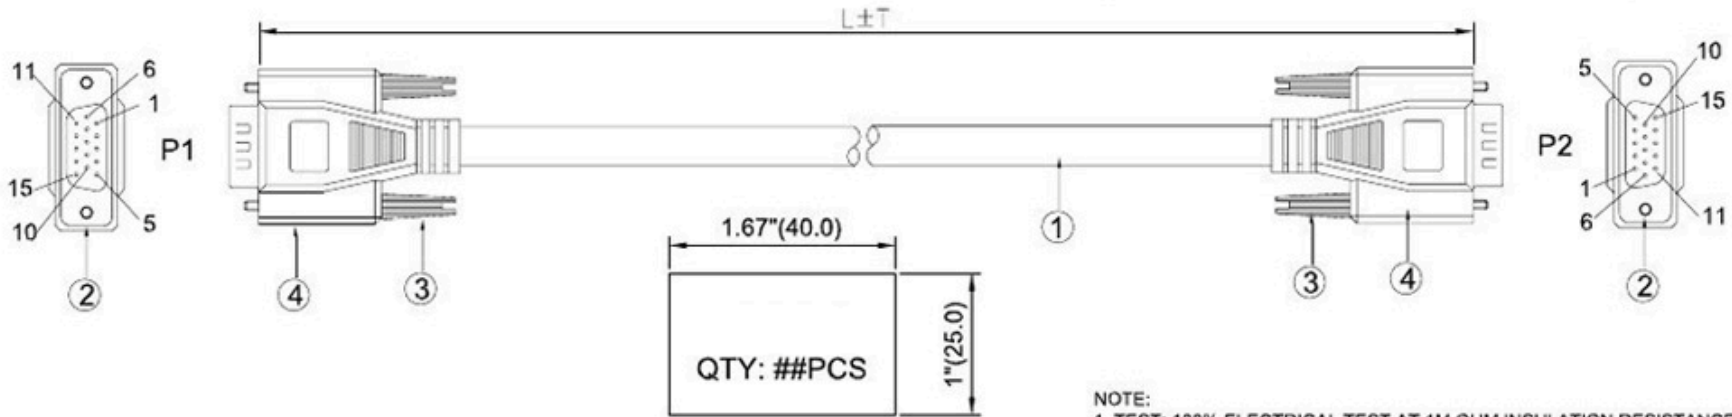

PIN OUT					
P1	COLOR	P2	P1	COLOR	P2
HD15M		HD15M	HD15M		HD15M
1	BLACK	1	9	GREY	9
2	BROWN	2	10	WHITE	10
3	RED	3	11	PINK	11
4	ORANGE	4	12	L-GREEN	12
5	YELLOW	5	13	L-BLUE	13
6	GREEN	6	14	BROWN/WHITE	14
7	BLUE	7	15	PINK/WHITE	15
8	PURPLE	8	SHELL	DRAIN	SHELL

QTY: ##PCS

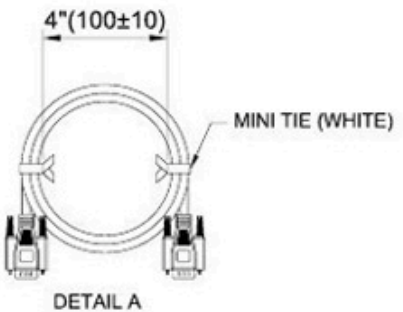

NOTE:
 1. TEST: 100% ELECTRICAL TEST AT 1M OHM INSULATION RESISTANCE.
 2. PACKING:

ROUND CABLE METHOD SEE "DETAIL A"			
	BAG TYPE	QTY	LABEL
SMALL	POLYBAG	1 CABLE	NONE
MIDDLE	POLYBAG	10 CABLES(15')	SEE "DETAIL B"
		20 CABLES(6')	
LARGE	POLYBAG	ALL	NONE

EACH LARGE POLYBAG IN AN OUTER CARTON

3. 25' BE NOT PACKING MIDDLE BAG.

H5MM25	25	25'(7620)	+6"/-0(+152/-0)
H5MM15	15	15'(4572)	+6"/-0(+152/-0)
H5MM06	06	6'(1830)	+3"/-0(+76/-0)
PART NO.	**	L	T

ITEM	Q'TY	PART NO.	DESCRIPTION
4	50g	PVC-BG	OVER MOLD: BEIGE PVC 45P, UL94V-0.
3	4PCS	TS440-SL-BG	THUMBSCREW: ϕ 7.8x53.4mm, #4-40 UNC, MOLDED BEIGE PVC 30P, UL94V-0.
2	2PCS	HDB15MS	CONNECTOR: HDB15P MALE, SOLDER TYPE, GOLD FLASH CONTACTS, BLACK PBT INSULATION, NICKEL PLATED FULL SHELL.
1	1PC	PMC1528MS2-N	CABLE: 28AWGx15C+DRAIN+AL/MY, NON-UL, BEIGE PVC JACKET, OD=6.0±0.2mm.

PART LIST

DRAWN BY	UNIT: Inches [mm]	TITLE:
	DATE	MOLDED MONITOR CABLE, HDB15 MALE TO MALE, BEIGE, **FT.
CHECKED BY	DATE	DRAWING NO.
APPROVED BY	DATE	REV: A
P.O. NO.	DATE	PART NO.