


Available Cable Types
SMC-240 Low Loss 50 Ohm Coax Cable

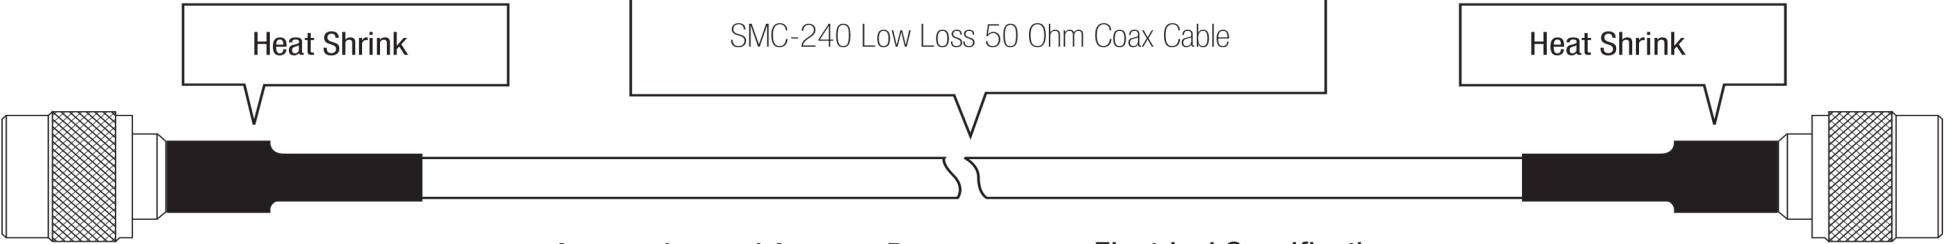

Heat Shrink

Heat Shrink

Attenuation and Average Power

Electrical Specifications

- Available Connector Types**
- BNC Male / Female
 - N Male / Female
 - SMA Male / Female
 - RPSMA Male / Female
 - TNC Male / Female
 - RPTNC Male / Female

MHz	dB/100 FT	dB/100 M	Av. Power (kW)
30	.7	2.2	3.33
50	.9	2.9	2.57
150	1.5	5.0	1.47
220	1.9	6.1	1.20
450	2.7	8.9	.83
800	3.7	12.0	.61
900	3.9	12.8	.58
1500	5.1	16.8	.44
1800	5.7	18.6	.40
2000	6.0	19.6	.37
2200	6.3	20.7	.36
2400	6.6	21.7	.34
2500	6.8	22.2	.33
3500	8.1	26.7	.27
5800	10.	35.5	.21

Cutoff Frequency	31GHz
Peak Power	5.6 kW
Velocity of Propagation	84%
Impedance	50Ω
Capacitance	79.4 pF/ft
DC Resistance - Inner	10.5 Ω/km
DC Resistance - Outer	12.8 Ω/km
Shielding Effectiveness	>90 dB
Jacket Spark	4000 Volts

- Available Connector Types**
- BNC Male / Female
 - N Male / Female
 - SMA Male / Female
 - RPSMA Male / Female
 - TNC Male / Female
 - RPTNC Male / Female

Available Form Factors

Straight

Available Form Factors

Straight



an INFINITI® brand

www.showmecables.com
888-519-9505 | sales@showmecables.com

Title SMA Male to TNC Female Low Loss 240 Coaxial Assembly

Part Number 28-259-XXX

Notes

1. Unless otherwise specified all dimensions are nominal
2. All specifications are subject to change without notice at any time
3. Dimensions are in millimeters